



OHAUS ADAM[®]
SCALES & BALANCES

2025 PRICE CATALOG

Your Adam Equipment Office

 Adam Equipment, Inc.
1 Fox Hollow Rd,
Oxford, CT 06478, USA



Why Adam?

For more than a half-century, professionals worldwide have relied on Adam Equipment for dependable weighing products that offer intuitive operation and solid performance.

Indeed, dependability has been one of the hallmarks of Adam Equipment since our inception. Customers can see that with our scales and balances, which are backed by our industry-leading warranty program. Our network of authorized dealers can see it through their interactions with our staff of trained professionals.

We've found a new way to demonstrate our dependability this year with the launch of our *Dealer Zone*, an online portal that allows dealers to:

- Quickly and easily place orders 24 hours a day, 365 days a year on their own schedule
- Check stock availability
- Access downloadable product resources for their customers and their websites

Adam operates offices and distribution centers in England, the United States, South Africa, Australia, China, Germany and the UAE to provide product support and fast, efficient delivery to our worldwide distribution network and customer base.

Warranty

We trust the quality and construction of our products. To demonstrate that trust, we've increased the warranties on nearly all our scales and balances to up to five years — levels of protection that are unheard of in the professional weighing industry.

The new warranty periods come at no extra cost and mean customers are getting greater value and peace of mind for their money. With Adam's unmatched warranty coverage and after-sales support, we're sure you'll have complete confidence in our products.

Scan the QR code for more info or visit:
adamequipment.com/warranty



Approvals



NTEP

In the US, scales and balances that are used to sell goods by weight must be approved by the National Type Evaluation Program. NTEP relies on expertise and input from regulatory and industry representatives to develop a on standards and procedures. Learn more at www.ncwm.net



Measurement Canada

In Canadian retail settings, scales and balances used for trade must receive Measurement Canada approval. Measurement Canada adheres to Weights and Measures Act regulations, ensuring accuracy when products are weighed prior to sale. Learn more at www.ic.gc.ca





















NSF

NSF International is a product testing, inspection and certification organization created to standardize sanitation and food safety requirements globally. NSF develops standards for industries including food & beverage, home appliances and water, as well as performs analytical testing for supplements and pharmaceuticals. Learn more at www.nsf.org

Icon Guide

FEATURES

- 
Backlit Display
 The Liquid Crystal Display (LCD) of some balances is lit from behind to facilitate easy reading of weighing results.
- 
Tare Function
 The tare function allows the weight of a container or packaging to be removed from the total weight reading.
- 
Multiple Weighing Units
 The scale or balance offers the option to switch between different units of weight measurement.
- 
Weigh-Below Hook
 Weigh-below hooks are for suspended weighing, typically for density determination or specific gravity testing.
- 
Security Bracket
 To help prevent theft, the security bracket allows an Adam balance to be secured with a security lock and cable.
- 
RS-232 Port
 An RS-232 port is a commonly used output when sending data to a printer or PC for immediate, automated traceability.
- 
USB Port
 Allow for sending weight data to a PC or for transferring data to a USB stick, helping comply with GLP/ISO guidelines.
- 
Ethernet Port
 Send weight data and more via the scale or balance's RJ45 ethernet output.
- 
IP67 & IP68 Waterproof Rated
 IP is Ingress Protection, and the number corresponds with a level of protection from ingress of water and dust.
- 
Internal Calibration
 Balances with internal calibration help maintain accuracy without having to check using external weights.
- 
External Calibration
 Scales and balances with external calibration require periodic manual checks using calibration weights.
- 
Rechargeable Battery
 Rechargeable batteries on scales and balances enable added flexibility and portability.
- 
Battery Power
 Scales and balances powered by batteries are perfect for areas with no power.
- 
Built-In Printer
 Scale with built-in printers allow weight information to be recorded on labels immediately after weighing. These labels are fully customizable.
- 
Date
 Date information helps stay in line with GLP / GMP / ISO guidelines, improving traceability and ensuring thorough records of weight data.
- 
Time
 Time information helps stay in line with GLP / GMP / ISO guidelines, improving traceability and ensuring thorough records of weight data.
- 
GLP / GMP / ISO Printouts
 GLP (Good Laboratory Practice), GMP (Good Manufacturing Practice) and ISO (International Organization of Standardization) are quality assurance guidelines that cover how traceable information should be recorded.
- 
Freight Shipping Only
 Products with this icon are eligible for freight shipping only due to the size and weight of the product.

APPLICATIONS

- 
Accumulation
 A weighing function that allows the device to total multiple weighing results and display them on the screen.
- 
Averaging
 The averaging function stabilizes readings by calculating the average weight over time, useful for weighing unstable or moving items.
- 
BMI
 Scales that calculate BMI (Body Mass Index) measure body fat based on an adult's height and weight.
- 
Check Counting
 Compares a total of identical pieces by weight to determine if they've reached a preset total, based on a known piece weight.
- 
Checkweighing
 To compare a weight against limits to determine if the weight is within preset limits.
- 
Density Determination
 Determines the density of material, either solids or liquids, by comparing the material's weight in the air, versus its weight when suspended in a liquid.
- 
Display Hold
 Freezes the weight reading on the display, making the weight easier to read and record.
- 
Dual Scale Operation
 Connect a weighing scale to a second platform to gain the benefits of improved capacity, readability or pan size.
- 
Dynamic / Animal Weighing
 Calculates an average weight over a set amount of time to help weigh moving animals or fluid samples.
- 
Formulation
 AKA recipe calculation function. Easily stores, adds and calculates the weight of multiple ingredients to provide a total weight value.
- 
Height Measurement
 Scales with this icon are supplied with a height measure, which, along with a weight reading, also allows the user to calculate BMI.
- 
Moisture Determination
 Calculates moisture percentage by comparing an initial sample weight to the same sample's weight after drying.
- 
Net Total
 Automatically adds the individual weights of several components and displays the total.
- 
Parts Counting
 Calculates the number of parts placed on the platform based on the average piece weight, which may be entered or determined.
- 
Peak Hold
 Records the highest reading detected when weight (or force) is applied continuously and holds the result on the display.
- 
Percentage Weighing
 The scale or balance can display the weight of an item as a percentage of a reference weight.
- 
Price Computing
 Price computing scales calculate weight as well as unit price and total price for customers to pay based on a known piece weight.
- 
Statistics
 Allows users to collect different statistics in various modes, such as weighing, counting or percentage weighing.
- 
Textiles
 Determines the number of yarns in a bundle. You measure a bundle of yarn to get a yarn count.
- 
Weighing
 To find the weight (mass) of an unknown against a standard known mass.

NOTE: Where battery life is quoted, this is the maximum possible life of the rechargeable battery when new from full-charge to empty, with the device's backlight permanently switched off.

Adam's **NEW!** Dealer Zone



It's now easier than ever for authorized dealers to order from Adam.

We're revolutionizing the way we do business through our dealer network with the new Dealer Zone!



24/7 Online Ordering & Service

Your day isn't limited to normal business hours. With round-the-clock access to the Dealer Zone, Adam is always there wherever and whenever you need us. Log on to the Dealer Zone to:

- Quickly and easily order scales, balances, parts and accessories on your schedule
- Check stock availability
- Get faster order processing and shipments
- Update your account information and add users



Adam Resources at Your Fingertips

Looking for product information or images? The Dealer Zone is home to important resources that you can access, view and download quickly and easily, including:

- Manuals
- Data sheets
- Catalogs
- Flyers
- Product images
- Banners for your website
- Videos
- Product data



Exclusive Special Offers

As an added bonus, Dealer Zone users will also periodically receive exclusive, members-only special offers on:

- Discounted pricing, such as special rates on multi-unit purchases
- Shipping discounts
- Discounted accessories with an online product purchase

Contact your Adam business development manager to request a Dealer Zone account.

Capacity Selection Guide
6-8
06

Analytical & Precision Balances
9-19
09

Compact Balances
20-27
20

Moisture Analyzers
28-29
28

Bench & Floor Scales
30-43
30

Counting Scales
44-51
44

Washdown & Waterproof Scales
52-59
52

Retail Scales
60-61
60

Heavy-Duty & Platform Scales
62-71
62

Weighing Indicators
72-79
72

Health & Fitness Scales
80-83
80

Weights & Accessories
84-95
84

Shipping Information & Index
96-99
96

NEW!

Find Adam's **NEW AE 505** Touch-screen Label Printing Indicator on page 76



LOOK FOR THIS ICON
on the product pages!



INTRODUCING
**ADAM
CONNECT**



Wireless connectivity is now available across our product range!

We're used to many of our everyday devices being connected, whether to the internet or each other. We have smartphones, smart lights, even smart refrigerators. So how about smart scales and balances? With Adam Connect, your Adam weighing devices can easily connect wirelessly and transfer results to:

- Computers
- Printers
- LIMS systems

Look for the **Adam Connect Compatible** symbol throughout the catalog to know which products offer Adam Connect capabilities!



1

Connect to
your device

2

Wirelessly transmit weight
data to a printer or PC*

3

Save your data, print it, or
send it anywhere in the world



*up to 35 feet



Find out more about the **NEW** Adam Connect on **pg. 92**



BE ADAM GREEN TEAM

SUSTAINABILITY COMMITMENT



Adam is working toward a **greener** future.

Sustainability may be one of Adam Equipment's corporate goals, but the people driving the change are Adam's workforce.

Adam has been working to green its office spaces, source sustainable energy (including the addition of solar panels to the roof of our Milton Keynes headquarters) and reduce the use of single use plastics in the packaging of our products.

As part of Adam's sustainability initiative, the company formed the **Adam Green Team**, a group of dedicated employees from around the globe tasked with initiating and leading impactful environmental and social initiatives.

Members of the Green Team hold key roles in identifying opportunities to reduce Adam's environmental footprint, promote social responsibility and drive positive change in our operations. Through collaboration and innovation, the Green Team aims to strengthen Adam's commitment to sustainable practices and create a greener future, one eco-friendly project at a time.

Green Team efforts aren't limited to just Adam employees. They're making meaningful connections with like-minded groups and individuals who share our passion for sustainability.

Green Team's Goals

- Improve resource efficiency
- Minimize Adam's environmental impact
- Foster a culture of sustainability across Adam's facilities in the UK, United States, Germany, Australia, South Africa and China
- Meet key metrics and KPIs to ensure success

Green Team Initiatives

- Develop sustainable product lines and greener packaging materials
- Reduce overall waste and carbon emissions
- Engage with local communities to support environmental conservation efforts
- Review internal processes to create positive environmental impacts

That means partnering with local organizations to offset our carbon emissions — such as planting trees, as employees from several Adam offices did to celebrate Adam's 50th anniversary in 2022 — and reaching out to Adam's dealer network to find ways to work together in a more environmentally friendly way.

Pictured: Adam Equipment's headquarters in Milton Keynes, UK, freshly equipped with solar panels on its rooftop for a smaller energy bill.



6 Capacity Selection Guide

Looking for a weighing scale or balance with a **specific capacity**? Use this guide to find Adam models by capacity, from 50g to 10 tons.

Model	Capacity	Readability	Page
PMB 53	50g	0.001g / 0.01%	29
EAB 125i	62g / 120g	0.01mg / 0.1mg	10-11
SAB 125i	62g / 120g	0.01mg / 0.1mg	12-13
EAB 124e	120g	0.0001g	10-11
EAB 124i	120g	0.0001g	10-11
SAB 124e	120g	0.0001g	12-13
SAB 124i	120g	0.0001g	12-13
LAB 124e	120g	0.0001g	14-15
LAB 124i	120g	0.0001g	14-15
HCB 123	120g	0.001g	22-23
HCB 153	150g	0.005g	22-23
PMB 163	160g	0.001g / 0.01%	29
PMB 202	200g	0.01g / 0.05%	29
CQT 202	200g	0.01g	21
DCT 201	200g	0.1g	26
LAB 214e	210g	0.0001g	14-15
LAB 214i	210g	0.0001g	14-15
EAB 225i	82g / 220g	0.01mg / 0.1mg	10-11
SAB 225i	82g / 220g	0.01mg / 0.1mg	12-13
EAB 224e	220g	0.0001g	10-11
EAB 224i	220g	0.0001g	10-11
SAB 224e	220g	0.0001g	12-13
SAB 224i	220g	0.0001g	12-13
LPB 223e	220g	0.001g	14-15
LPB 223i	220g	0.001g	14-15
LAB 254e	250g	0.0001g	14-15
LAB 254i	250g	0.0001g	14-15
CQT 251	250g	0.1g	21
HCB 302	300g	0.01g	22-23
EAB 314e	310g	0.0001g	10-11
EAB 314i	310g	0.0001g	10-11
SAB 314e	310g	0.0001g	12-13
SAB 314i	310g	0.0001g	12-13
EPB 363e	360g	0.001g	10-11
EPB 363i	360g	0.001g	10-11
SPB 363e	360g	0.001g	12-13
SPB 363i	360g	0.001g	12-13
EAB 414i	410g	0.0001g	10-11
LPB 423e	420g	0.001g	14-15
LPB 423i	420g	0.001g	14-15
CB 501	500g	0.1g	25
SAB 514i	510g	0.0001g	12-13
HCB 602H	600g	0.01g	22-23
HCB 602aM	600g	d=0.01g e=0.1g	22-23
HCB 602	600g	0.02g	22-23
CQT 601	600g	0.1g	21
DCT 601	600g	0.1g	26
LPB 623e	620g	0.001g	14-15
LPB 623i	620g	0.001g	14-15
EPB 723e	720g	0.001g	10-11
EPB 723i	720g	0.001g	10-11

Model	Capacity	Readability	Page
SPB 723e	720g	0.001g	12-13
SPB 723i	720g	0.001g	12-13
LPB 823e	820g	0.001g	14-15
LPB 823i	820g	0.001g	14-15
HCB 1002M	1000g	d=0.01g e=0.1g	22-23
HCB 1002	1000g	0.01g	22-23
CB 1001	1000g	0.1g	25
EPB 1203i	1200g	0.001g	10-11
SPB 1203i	1200g	0.001g	12-13
CBX 1201	1200g	0.1g	24
HCB 1502	1500g	0.05g	22-23
CQT 1501	1500g	0.1g	21
DCT 2001	2000g	0.1g	26
CQT 2000	2000g	1g	21
DCT 2000	2000g	1g	26
EPB 2103i	2100g	0.001g	10-11
SPB 2103i	2100g	0.001g	12-13
HCB 2202	2200g	0.01g	22-23
LTB 2602e	2600g	0.01g	14-15
LTB 2602i	2600g	0.01g	14-15
CQT 2601	2600g	0.1g	21
TBB 2610S	2610g	0.1g	27
TBB 2610T	2610g	0.1g	27
HCB 3001	3000g	0.1g	22-23
HCB 3001M	3000g	d=0.5g e=0.5g	22-23
CBX 3001	3000g	0.5g	24
SWZ 6Da	3lb / 6lb	0.001lb / 0.002lb	61
SWZ 6DPa	3lb / 6lb	0.001lb / 0.002lb	61
LBX 3	6lb / 3kg	0.001lb / 0.5g	31
CB 3000	3000g	1g	25
WBW 6aM	6lb / 3kg	0.002lb / 1g	58
ETB 3202e	3200g	0.01g	10-11
ETB 3202i	3200g	0.01g	10-11
STB 3202e	3200g	0.01g	12-13
STB 3202i	3200g	0.01g	12-13
LTB 3602e	3600g	0.01g	14-15
LTB 3602i	3600g	0.01g	14-15
CDT 4	8lb / 4kg	0.0002lb / 0.1g	45
CCT 4	8lb / 4kg	0.0002lb / 0.1g	46-47
CKT 4	8lb / 4kg	0.0002lb / 0.1g	32-33
ABW 4S	8lb / 4kg	0.0002lb / 0.1g	54-55
ABW 4	8lb / 4kg	0.001lb / 0.5g	53
CKT 4M	8lb / 4kg	0.002lb / 1g	30-31
LTB 4602e	4600g	0.01g	14-15
LTB 4602i	4600g	0.01g	14-15
CQT 5000	5000g	1g	21
DCT 5000	5000g	2g	26
LTB 6002e	6000g	0.01g	14-15
LTB 6002i	6000g	0.01g	14-15
LBB 6001e	6000g	0.1g	14-15
HCB 6001	6000g	0.1g	22-23
LBX 6	12lb / 6kg	0.002lb / 1g	31
CBX 6000	6000g	1g	24
SWZ 15Da	6lb / 15lb	0.001lb / 0.002lb	61
SWZ 15DPa	6lb / 15lb	0.001lb / 0.002lb	61
CPWplus 6	13lb / 6kg	0.005lb / 0.002kg	34-35
GG5 15aM	15lb / 6kg	0.002lb / 1g	56-57
WS 15aM	15lb / 6kg	0.002lb / 0.001kg	70

Model	Capacity	Readability	Page
WBW 15aM	15lb / 6kg	0.005lb / 2g	58
WBZ 15aM	15lb / 6kg	0.005lb / 0.002kg	59
GBK 15aM	15lb / 6kg	0.002lb / 2g	36-37
ETB 6202e	6200g	0.01g	10-11
STB 6202e	6200g	0.01g	12-13
STB 6202i	6200g	0.01g	12-13
CCT 8UH	16lb / 8kg	0.0001lb / 0.05g	46-47
CKT 8UH	16lb / 8kg	0.0001lb / 0.05g	32-33
LBB 8001e	8000g	0.1g	14-15
CKT 8H	16lb / 8kg	0.0002lb / 0.1g	32-33
GBK-Plus 8	16lb / 8kg	0.0002lb / 0.1g	36-37
GBK-S 8	16lb / 8kg	0.0002lb / 0.1g	36-37
AGB 16a	16lb / 8kg	0.0005lb / 0.2g	38-39
BKT 16a	16lb / 8kg	0.0005lb / 0.2g	40-41
BTT 8	16lb / 8kg	0.0002lb / 0.1g	42-43
CCT 8	16lb / 8kg	0.0005lb / 0.2g	46-47
CDT 8	16lb / 8kg	0.0005lb / 0.2g	45
CKT 8	16lb / 8kg	0.0005lb / 0.2g	32-33
GB 16a	16lb / 8kg	0.0002lb / 0.1g	71
WS 16a	16lb / 8kg	0.001lb / 0.5g	70
GGG 16a	16lb / 8kg	0.001lb / 0.5g	56-57
CKT 8M	16lb / 8kg	0.005lb / 2g	32-33
ABW 8S	16lb / 8kg	0.001lb / 0.5g	54-55
ABW 8	16lb / 8kg	0.0002lb / 0.1g	53
ETB 8202e	8200g	0.01g	10-11
STB 8202e	8200g	0.01g	12-13
LBB 12001e	12000g	0.1g	14-15
NBL 12001e	12000g	0.1g	18-19
NBL 12001P	12000g	0.1g	18-19
LBX 12	25lb / 12kg	0.005lb / 2g	31
LBL 14001e	14kg	0.1g	16-17
LBL 14001P	14kg	0.1g	16-17
SWZ 30Da	15lb / 30lb	0.002lb / 0.005lb	61
SWZ 30DPa	15lb / 30lb	0.002lb / 0.005lb	61
LBB 15001e	15000g	0.1g	14-15
WS 30aM	30lb / 15kg	0.005lb / 0.002kg	70
GBK-30aM	30lb / 15kg	0.005lb / 2g	36-37
CPWplus 15	30lb / 15kg	0.005kg	34-35
GGG 30aM	30lb / 15kg	0.01lb / 5g	56-57
WBW 30aM	30lb / 15kg	0.01lb / 5g	58
NBL 16001e	16000g	0.1g	18-19
NBL 16001P	16000g	0.1g	18-19
CCT 16UH	35lb / 16kg	0.0002lb / 0.1g	46-47
CKT 16UH	35lb / 16kg	0.0002lb / 0.1g	32-33
GB 35a	35lb / 16kg	0.0005lb / 0.2g	71
GBC 35a	35lb / 16kg	0.001lb / 0.5g	48-49
AGB 35a	35lb / 16kg	0.001lb / 0.5g	38-39
BCT 35a	35lb / 16kg	0.001lb / 0.5g	50-51
CDT 16	35lb / 16kg	0.001lb / 0.5g	45
BKT 35a	35lb / 16kg	0.001lb / 0.5g	40-41
BTT 16	35lb / 16kg	0.001lb / 0.5g	42-43
CCT 16	35lb / 16kg	0.001lb / 0.5g	46-47
CKT 16	35lb / 16kg	0.001lb / 0.5g	32-33
GBK-Plus 16	35lb / 16kg	0.001lb / 0.5g	36-37
GBK-S 16	35lb / 16kg	0.001lb / 0.5g	36-37
GGG 35a	35lb / 16kg	0.001lb / 0.5g	56-57
WS 35a	35lb / 16kg	0.002lb / 1g	70
ABW 16S	35lb / 16kg	0.002lb / 1g	54-55

Model	Capacity	Readability	Page
ABW 16	35lb / 16kg	0.005lb / 2g	53
MTB 20	44lb / 20kg	0.01lb / 0.005kg	81
CKT 20M	44lb / 20kg	0.01lb / 5g	32-33
NBL 22001e	22000g	0.1g	18-19
NBL 22001P	22000g	0.1g	18-19
LBL 24001e	24kg	0.1g	16-17
LBL 24001P	24kg	0.1g	16-17
GGB 65aH	65lb / 30kg	0.002lb / 1g	56-57
GGG 65a	65lb / 30kg	0.005lb / 2g	56-57
GGB 65a	65lb / 30kg	0.005lb / 2g	56-57
GBK 60aM	60lb / 30kg	0.01lb / 5g	36-37
GGG 60aM	60lb / 30kg	0.01lb / 5g	56-57
GGB 60aM	60lb / 30kg	0.01lb / 5g	56-57
SWZ 60Da	30lb / 60lb	0.01lb / 0.02lb	61
SWZ 60DPa	30lb / 60lb	0.01lb / 0.02lb	61
WS 60aM	60lb / 30kg	0.01lb / 0.005kg	70
WB 60aM	60lb / 30kg	0.01lb / 0.005kg	70
LBX 30	65lb / 30kg	0.01lb / 5g	31
BKT 65a	65lb / 30kg	0.002lb / 1g	40-41
AGB 65a	65lb / 30kg	0.002lb / 1g	38-39
CCT 32UH	70lb / 32kg	0.0005lb / 0.2g	46-47
CKT 32UH	70lb / 32kg	0.0005lb / 0.2g	32-33
CDT 32	70lb / 32kg	0.002lb / 1g	45
BCT 32	70lb / 32kg	0.002lb / 1g	50-51
CCT 32	70lb / 32kg	0.002lb / 1g	46-47
CKT 32	70lb / 32kg	0.002lb / 1g	32-33
BTT 32	70lb / 32kg	0.002lb / 1g	42-43
GB 70a	70lb / 32kg	0.002lb / 1g	71
GBK-Plus 32	70lb / 32kg	0.002lb / 1g	36-37
GBK-S 32	70lb / 32kg	0.002lb / 1g	36-37
GBC 70a	70lb / 32kg	0.002lb / 1g	48-49
WS 70a	70lb / 32kg	0.005lb / 2g	70
WB 70a	70lb / 32kg	0.005lb / 2g	70
ABW 32S	70lb / 32kg	0.005lb / 2g	54-55
ABW 32	70lb / 32kg	0.01lb / 5g	53
NBL 32001e	32000g	0.1g	18-19
LBL 34001e	34kg	0.1g	16-17
LBL 34001P	34kg	0.1g	16-17
CPWplus 35	35kg	0.02lb / 0.01kg	34-35
CPWplus 35M	35kg	0.02lb / 0.01kg	34-35
CPWplus 35L	35kg	0.02lb / 0.01kg	34-35
CKT 40M	88lb / 40kg	0.02lb / 10g	32-33
CCT 48UH	100lb / 48kg	0.001lb / 0.5g	46-47
CKT 48UH	100lb / 48kg	0.001lb / 0.5g	32-33
CDT 48	100lb / 48kg	0.005lb / 2g	45
CCT 48	100lb / 48kg	0.005lb / 2g	46-47
CKT 48	100lb / 48kg	0.005lb / 2g	32-33
SHS 100a	100lb / 50kg	0.02lb / 0.01kg	66
GBC 130a	130lb / 60kg	0.005lb / 2g	48-49
GBK-Plus 60	130lb / 60kg	0.005lb / 2g	36-37
GBK-S 60	130lb / 60kg	0.005lb / 2g	36-37
GB 130a	130lb / 60kg	0.005lb / 2g	71
BCT 130a	130lb / 60kg	0.005lb / 2g	50-51
BKT 130a	130lb / 60kg	0.005lb / 2g	40-41
BTT 60	130lb / 60kg	0.005lb / 2g	42-43
GBK 150aM	150lb / 60kg	0.05lb / 20g	36-37
GFK 150aM	150lb / 60kg	0.05lb / 20g	36-37
GGB 150aM	150lb / 60kg	0.05lb / 20g	56-57

Model	Capacity	Readability	Page
GGF 150aM	150lb / 60kg	0.05lb / 20g	56-57
WB 150aM	150lb / 60kg	0.02lb / 0.01kg	70
WF 150aM	150lb / 60kg	0.02lb / 0.01kg	70
GFK-Plus 75H	165lb / 75kg	0.002lb / 1g	36-37
GFK-S 75H	165lb / 75kg	0.002lb / 1g	36-37
GGF 165aH	165lb / 75kg	0.005lb / 2g	56-57
BKT 165aH	165lb / 75kg	0.005lb / 2g	40-41
GGB 165a	165lb / 75kg	0.01lb / 5g	56-57
GGF 165a	165lb / 75kg	0.01lb / 5g	56-57
GFC 165a	165lb / 75kg	0.01lb / 5g	48-49
GFK-Plus 75	165lb / 75kg	0.01lb / 5g	36-37
GFK-S 75	165lb / 75kg	0.01lb / 5g	36-37
BCT 165a	165lb / 75kg	0.01lb / 5g	50-51
BKT 165a	165lb / 75kg	0.01lb / 5g	40-41
BTT 75	165lb / 75kg	0.01lb / 5g	42-43
WB 165a	165lb / 75kg	0.01lb / 5g	70
WF 165a	165lb / 75kg	0.01lb / 5g	70
GF 165a	165lb / 75kg	0.01lb / 5g	71
CPWplus 75	165lb / 75kg	0.05lb / 0.02kg	34-35
CPWplus 75M	165lb / 75kg	0.05lb / 0.02kg	34-35
CPWplus 75W	165lb / 75kg	0.05lb / 0.02kg	34-35
CPWplus 75L	165lb / 75kg	0.05lb / 0.02kg	34-35
AGB 175a	175lb / 80kg	0.005lb / 2g	38-39
AGF 175a	175lb / 80kg	0.005lb / 2g	38-39
GB 260a	260lb / 120kg	0.01lb / 5g	71
GBK-Plus 120	260lb / 120kg	0.01lb / 5g	36-37
GBK-S 120	260lb / 120kg	0.01lb / 5g	36-37
BKT 260a	260lb / 120kg	0.01lb / 5g	40-41
AGB 260a	260lb / 120kg	0.01lb / 5g	38-39
SHS 300a	300lb / 150kg	0.05lb / 0.02kg	66
WF 300aM	300lb / 150kg	0.05lb / 0.02kg	70
WL 300aM	300lb / 150kg	0.05lb / 0.02kg	70
GGF 330a	330lb / 150kg	0.02lb / 0.01kg	56-57
GGL 330a	330lb / 150kg	0.02lb / 0.01kg	56-57
WF 330a	330lb / 150kg	0.02lb / 10g	70
WL 330a	330lb / 150kg	0.02lb / 10g	70
GFC 330a	330lb / 150kg	0.02lb / 10g	48-49
GFK-Plus 150	330lb / 150kg	0.02lb / 0.01kg	36-37
GFK-S 150	330lb / 150kg	0.02lb / 0.01kg	36-37
BCT 330a	330lb / 150kg	0.02lb / 10g	50-51
BKT 330aH	330lb / 150kg	0.01lb / 5g	40-41
BKT 330a	330lb / 150kg	0.02lb / 0.01kg	40-41
BTT 150	330lb / 150kg	0.02lb / 10g	42-43
GF 330a	330lb / 150kg	0.02lb / 10g	71
GFK-Plus 150H	330lb / 150kg	0.005lb / 2g	36-37
GFK-S 150H	330lb / 150kg	0.005lb / 2g	36-37
GBK 300aM	300lb / 150kg	0.05lb / 20g	36-37
GFK 300aM	300lb / 150kg	0.05lb / 20g	36-37
GGF 300aM	300lb / 150kg	0.05lb / 20g	56-57
GGL 300aM	300lb / 150kg	0.05lb / 0.02kg	56-57
CPWplus 150	330lb / 150kg	0.005lb / 2g	34-35
CPWplus 150M	330lb / 150kg	0.005lb / 2g	34-35
CPWplus 150L	330lb / 150kg	0.1lb / 0.05kg	34-35
AGF 350a	350lb / 160kg	0.01lb / 5g	38-39
CPWplus 200	440lb / 200kg	0.1lb / 0.05kg	34-35

Model	Capacity	Readability	Page
CPWplus 200M	440lb / 200kg	0.1lb / 0.05kg	34-35
CPWplus 200W	440lb / 200kg	0.1lb / 0.05kg	34-35
CPWplus 200L	440lb / 200kg	0.1lb / 0.05kg	34-35
WL 600aM	600lb / 300kg	0.05lb / 20g	70
GGL 600aM	600lb / 300kg	0.1lb / 0.05kg	56-57
SHS 600a	600lb / 300kg	0.1lb / 0.05kg	66
GFK 600aM	600lb / 300kg	1.1lb / 0.5kg	36-37
AGF 660a	660lb / 300kg	0.02lb / 0.01kg	38-39
GFC 660a	660lb / 300kg	0.05lb / 20g	48-49
GFK-Plus 300	660lb / 300kg	0.05lb / 20g	36-37
GFK-S 300	660lb / 300kg	0.05lb / 20g	36-37
BCT 660a	660lb / 300kg	0.05lb / 20g	50-51
GF 660a	660lb / 300kg	0.05lb / 20g	71
BKT 660a	660lb / 300kg	0.05lb / 0.02kg	40-41
BTT 300	660lb / 300kg	0.05lb / 20g	42-43
MDW 300L	660lb / 300kg	0.1lb / 0.05kg	82-83
CPWplus 300L	660lb / 300kg	0.2lb / 0.1kg	34-35
LHS 1000a	1000lb / 500kg	0.2lb / 0.1kg	66
PTM 500	1100lb / 500kg	0.2lb / 0.1kg	67
AGF 1320a	1320lb / 600kg	0.05lb / 20g	38-39
BKT 1320a	1320lb / 600kg	0.1lb / 0.05kg	40-41
GFK-Plus 600	1320lb / 600kg	0.1lb / 50g	36-37
GFK-S 600	1320lb / 600kg	0.1lb / 50g	36-37
GF 1320a	1320lb / 600kg	0.1lb / 50g	71
IHS 2a	2000lb / 1000kg	0.5lb / 0.2kg	66
AELP 1000	2200lb / 1000kg	0.05lb / 0.02kg	63
PT 110	2500lb / 1000kg	0.5lb / 0.2kg	68-69
PT 112	2500lb / 1000kg	0.5lb / 0.2kg	68-69
PT 115	2500lb / 1000kg	0.5lb / 0.2kg	68-69
PT 110S	2500lb / 1000kg	0.5lb / 0.2kg	68-69
PT 112S	2500lb / 1000kg	0.5lb / 0.2kg	68-69
PT 115S	2500lb / 1000kg	0.5lb / 0.2kg	68-69
PT 112M	2500lb / 1500kg	0.5lb / 0.2kg	68-69
LHS 3000a	3000lb / 1500kg	0.5lb / 0.2kg	66
LHS 4000a	4000lb / 2000kg	1lb / 0.5kg	66
PTSplus 5000a	5000lb / 2000kg	1lb / 0.5kg	60
PTT 5000a	5000lb / 2000kg	1lb / 0.5kg	61
AELP 2000	4400lb / 2000kg	1lb / 0.5kg	63
PT 310-5	5000lb / 3000kg	1lb / 0.5kg	68-69
PT 312-5	5000lb / 3000kg	1lb / 0.5kg	68-69
PT 315-5	5000lb / 3000kg	1lb / 0.5kg	68-69
PT 310-5S	5000lb / 3000kg	1lb / 0.5kg	68-69
PT 312-5S	5000lb / 3000kg	1lb / 0.5kg	68-69
PT 315-5S	5000lb / 3000kg	1lb / 0.5kg	68-69
PT 312-5M	5000lb / 3000kg	1lb / 0.5kg	68-69
IHS 5a	5000lb / 3000kg	1lb / 0.5kg	66
AELP 3000	6600lb / 3000kg	2lb / 1kg	63
PT 310-10	10000lb / 4500kg	2lb / 1kg	68-69
PT 312-10	10000lb / 4500kg	2lb / 1kg	68-69
PT 315-10	10000lb / 4500kg	2lb / 1kg	68-69
PT 310-10S	10000lb / 4500kg	2lb / 1kg	68-69
PT 312-10S	10000lb / 4500kg	2lb / 1kg	68-69
PT 315-10S	10000lb / 4500kg	2lb / 1kg	68-69
IHS 10a	10000lb / 5000kg	2lb / 1kg	66
IHS 20a	20000lb / 10000kg	5lb / 2kg	66

09

ANALYTICAL & PRECISION BALANCES

Adam Equipment's analytical balances offer solutions to the most complex and precise weighing tasks from formulation, statistical analysis and purity analysis to density determination and conformance testing. Not only do Adam's easy-to-use analytical range of balances simplify weighing tasks, they also produce reliable results ideal for data handling with multiple connectivity options and tracking capabilities that are compliant with GLP (Good Laboratory Practices).

Our precision balances consistently deliver increased efficiency and accurate results, even in testing laboratory environments. Equipped with a multitude of intuitive features and functions, Adam's precision balances are well-suited for laboratory use, quality control testing, manufacturing operations and production applications.



Stainless Steel Pan
Grade 304 stainless steel pan for swift cleaning



Vivid Display
Easily visible in any lighting conditions



Multiple Connections
Ethernet, USB and RS-232 interfaces



LUNA
LBL pg.16

Equinox semi-micro, analytical and precision balances bring remarkable precision to labs that perform highly detailed testing. The Equinox is ideal for research and quality assurance facilities; science education; precision counting; and pharma/forensics applications needing exceptionally precise results.



EPB



ETB



Customizable 5-inch 800x480 pixel touch-screen display



USB port for transferring data to a USB stick



Built-in memory for storage and quick access to products and settings


Features



- RS-232 interface provides speedy connection to computers and printers
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Selectable digital filtering helps minimize effects of vibration and disturbances
- Security password control prevents unauthorized access
- Security slot for optional lock and cable
- Parts counting with freely selectable sample sizes
- Multilingual display permits use in various regions
- Large, grade 304 stainless steel pan
- Memory accumulation totals results
- Checkweighing with audible alarm

General Specifications


- Weighing units: g, mg, ct, GN, lb, oz, dwt, mm, ozt, tL.H, tL.S, tL.T, T, custom unit
- Interface: RS-232, USB
- Power supply: 24VDC 1A adapter*
- Display: 5" Touch-screen with 0.5" / 13mm-high digits
- Calibration: External, Internal automatic
- Housing: ABS Plastic
- Operating temperature: 10° to 30°C / 50° to 86°F

* 363 e/i and 3202 e/i models use a 9VDC 1A power supply



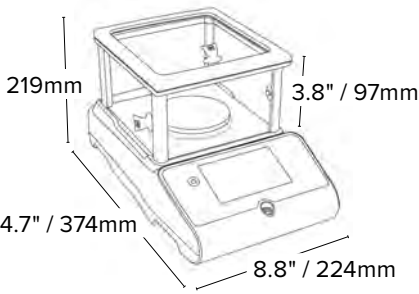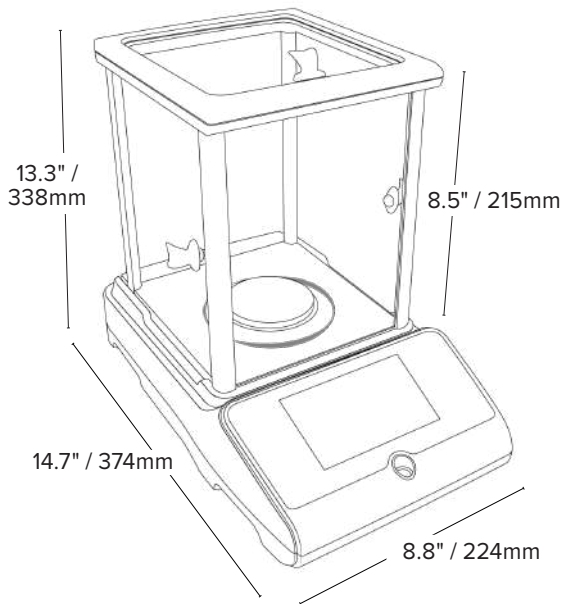

EPB Precision Balance

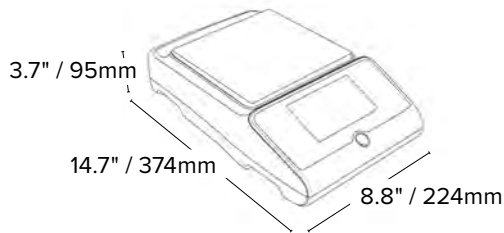

ETB Precision Balance

EAB Analytical Balance

Model	Capacity	Readability	Pan Size	List Price
EAB 125i	62g / 120g	0.01mg/ 0.1mg	80mm ø	\$5,320.00
EAB 225i	82g / 220g	0.01mg/ 0.1mg	80mm ø	\$6,205.00
EAB 124i	120g	0.0001g	80mm ø	\$2,875.00
EAB 224i	220g	0.0001g	80mm ø	\$3,160.00
EAB 314i	310g	0.0001g	80mm ø	\$3,450.00
EAB 414i	410g	0.0001g	80mm ø	\$4,660.00
EAB 514i	510g	0.0001g	80mm ø	\$5,865.00
EAB 124e	120g	0.0001g	80mm ø	\$2,650.00
EAB 224e	220g	0.0001g	80mm ø	\$2,930.00
EAB 314e	310g	0.0001g	80mm ø	\$3,230.00
EPB 363i	360g	0.001g	110mm ø	\$2,335.00
EPB 723i	720g	0.001g	110mm ø	\$2,565.00
EPB 1203i	1200g	0.001g	110mm ø	\$3,155.00
EPB 2103i	2100g	0.001g	110mm ø	\$3,510.00
EPB 363e	360g	0.001g	110mm ø	\$2,100.00
EPB 723e	720g	0.001g	110mm ø	\$2,335.00
ETB 3202i	3200g	0.01g	185x185mm	\$2,215.00
ETB 6202i	6200g	0.01g	185x185mm	\$2,920.00
ETB 3202e	3200g	0.01g	185x185mm	\$1,985.00
ETB 6202e	6200g	0.01g	185x185mm	\$2,685.00
ETB 8202e	8200g	0.01g	185x185mm	\$3,155.00

NOTE: Draft shield not included with ETB (top loader) models.

Models ending in:
i: Internal Calibration
e: External Calibration



Anti-Vibration Table
See pg. 92

With a high-resolution graphic display and intuitive features, Solis semi-micro, analytical and precision balances provide an outstanding solution for a variety of lab applications. Versatile and resilient, the Solis is ideal for research and quality assurance labs; science education; precision counting; and production and manufacturing applications.



SAB



SPB




STB



High-resolution graphic display shows detailed information



RS-232 interface provides speedy connection to computers and printers

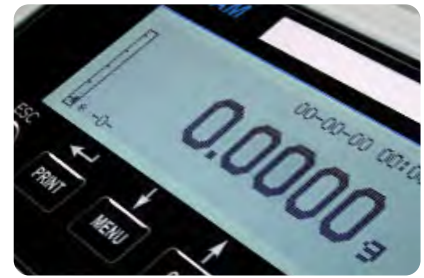

Selectable digital filtering helps minimize effects of vibration and disturbances

Features



- Large, grade 304 stainless steel pan allows for quick and easy cleaning
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Multilingual display permits use in various regions
- Checkweighing with audible alarm
- Parts counting with preset sample sizes
- Security slot for optional lock and cable
- Store up to 99 ingredients in formulation mode

General Specifications


- Weighing units: g, mg, lb, oz, ct, GN, dwt, mm, ozt, T, tl.H, tl.S, tl.T, custom unit
- Interface: RS-232
- Power supply: 24VDC 1A adapter*
- Display: Graphic display with 0.6" / 15mm-high digits
- Calibration: External, Internal automatic
- Housing: ABS Plastic
- Operating temperature: 10° to 30°C / 50° to 86°F

* 363 e/i and 3202 e/i models use a 9VDC 1A power supply



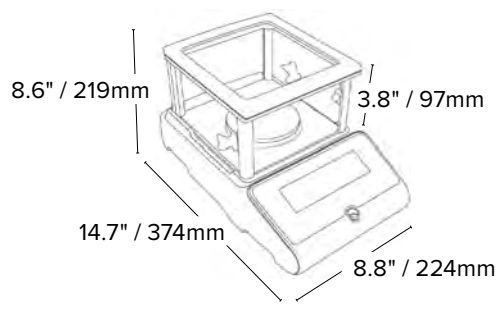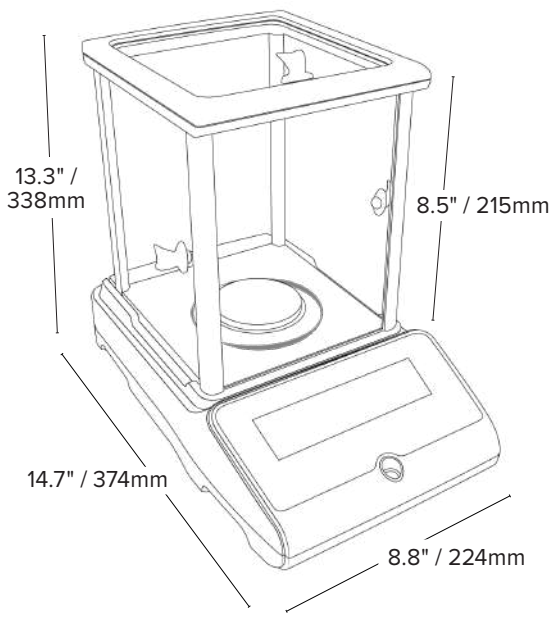

SPB Precision Balance

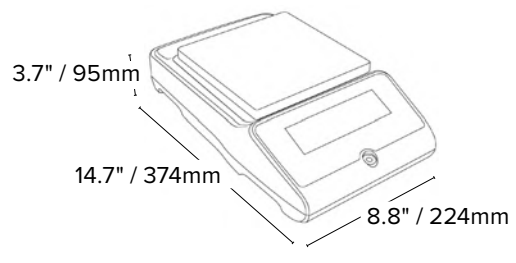

STB Precision Balance

SAB Analytical Balance

Model	Capacity	Readability	Pan Size	List Price
SAB 125i	62g / 120g	0.01mg/ 0.1mg	3.1" / 80mm ø	\$4,515.00
SAB 225i	82g / 220g	0.01mg/ 0.1mg	3.1" / 80mm ø	\$5,355.00
SAB 124i	120g	0.0001g	3.1" / 80mm ø	\$2,210.00
SAB 224i	220g	0.0001g	3.1" / 80mm ø	\$2,625.00
SAB 314i	310g	0.0001g	3.1" / 80mm ø	\$2,935.00
SAB 414i	410g	0.0001g	3.1" / 80mm ø	\$3,885.00
SAB 514i	510g	0.0001g	3.1" / 80mm ø	\$4,935.00
SAB 124e	120g	0.0001g	3.1" / 80mm ø	\$1,995.00
SAB 224e	220g	0.0001g	3.1" / 80mm ø	\$2,420.00
SAB 314e	310g	0.0001g	3.1" / 80mm ø	\$2,730.00
SPB 363i	360g	0.001g	4.3" / 110mm ø	\$1,755.00
SPB 723i	720g	0.001g	4.3" / 110mm ø	\$1,995.00
SPB 1203i	1200g	0.001g	4.3" / 110mm ø	\$2,570.00
SPB 2103i	2100g	0.001g	4.3" / 110mm ø	\$2,925.00
SPB 363e	360g	0.001g	4.3" / 110mm ø	\$1,525.00
SPB 723e	720g	0.001g	4.3" / 110mm ø	\$1,755.00
STB 3202i	3200g	0.01g	7.3"x7.3" / 185x185mm	\$1,635.00
STB 6202i	6200g	0.01g	7.3"x7.3" / 185x185mm	\$2,340.00
STB 3202e	3200g	0.01g	7.3"x7.3" / 185x185mm	\$1,405.00
STB 6202e	6200g	0.01g	7.3"x7.3" / 185x185mm	\$2,105.00
STB 8202e	8200g	0.01g	7.3"x7.3" / 185x185mm	\$2,570.00

NOTE: Draft shield not included with STB (top loader) models.

Models ending in:
i: Internal Calibration
e: External Calibration




ATP2 Thermal Printer
See pg. 93



ABI-1 Ionizer
See pg. 93

Luna balances are designed with an array of features and functions to accommodate most lab applications. The Luna range offers improved performance for faster, more accurate readings. With stylish, modern backlighting, Luna's impressive display gives an aura of smart sophistication.

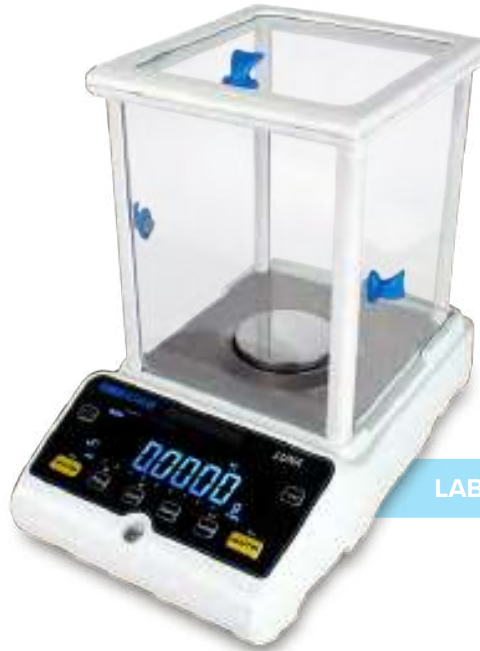

LCD display with large, bright digits on a black background



USB-A and RS-232 interfaces provide speedy communication with computers




Large, grade 304 stainless steel pan allows for easy cleaning



Features

- Sealed keypad protects against dirt and spills
- Multilingual display permits use in various regions
- Parts counting with preset sample sizes
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Selectable digital filtering for animal/dynamic weighing enables consistent results for moving subjects
- Security slot for optional lock and cable
- Weigh-below hook for density measurement


General Specifications

- Weighing units: g, mg, ct, GN, lb, oz, dwt, mm, ozt, tl.H, tl.S, tl.T, T, custom unit
- Interface: RS-232, USB
- Power supply: 18VDC 830mA adapter
- Display: Backlit LCD with 0.9" / 24mm-high digits
- Calibration: External, Internal automatic
- Housing: ABS Plastic
- Operating temperature: 15° to 30°C / 59° to 86°F



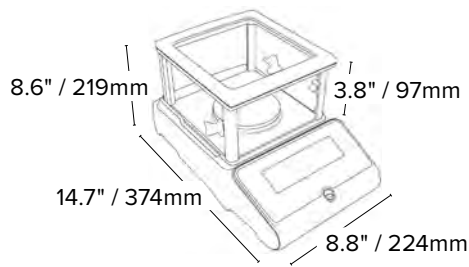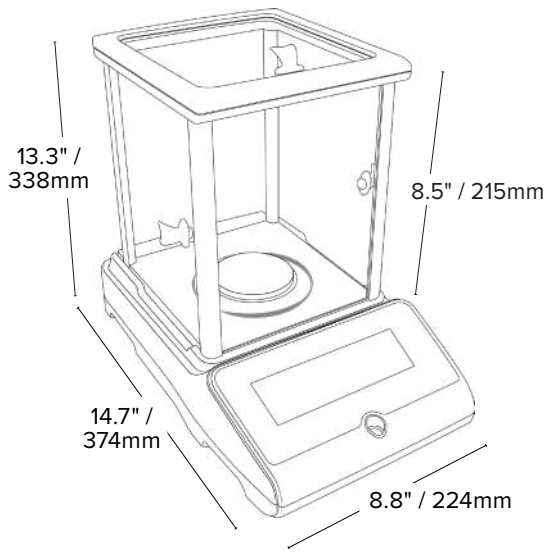

LPB Precision Balance

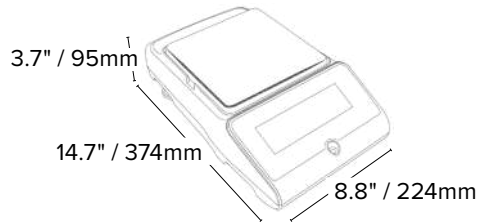

LAB Analytical Balance

LTB/LBB Precision Balance

Model	Capacity	Readability	Pan Size	List Price
LAB 84i	80g	0.0001g	3.1" / 80mm ø	\$1,915.00
LAB 124i	120g	0.0001g	3.1" / 80mm ø	\$2,270.00
LAB 214i	210g	0.0001g	3.1" / 80mm ø	\$2,385.00
LAB 254i	250g	0.0001g	3.1" / 80mm ø	\$2,735.00
LAB 84e	80g	0.0001g	3.1" / 80mm ø	\$1,675.00
LAB 124e	120g	0.0001g	3.1" / 80mm ø	\$1,915.00
LAB 214e	210g	0.0001g	3.1" / 80mm ø	\$2,160.00
LAB 254e	250g	0.0001g	3.1" / 80mm ø	\$2,510.00
LPB 223i	220g	0.001g	4.7" / 120mm ø	\$1,265.00
LPB 423i	420g	0.001g	4.7" / 120mm ø	\$1,455.00
LPB 623i	620g	0.001g	4.7" / 120mm ø	\$1,685.00
LPB 823i	820g	0.001g	4.7" / 120mm ø	\$1,915.00
LPB 223e	220g	0.001g	4.7" / 120mm ø	\$1,070.00
LPB 423e	420g	0.001g	4.7" / 120mm ø	\$1,245.00
LPB 623e	620g	0.001g	4.7" / 120mm ø	\$1,465.00
LPB 823e	820g	0.001g	4.7" / 120mm ø	\$1,695.00
LTB 2602i	2600g	0.01g	7.3"x7.3" / 185x185mm	\$1,265.00
LTB 3602i	3600g	0.01g	7.3"x7.3" / 185x185mm	\$1,385.00
LTB 4602i	4600g	0.01g	7.3"x7.3" / 185x185mm	\$1,495.00
LTB 6002i	6000g	0.01g	7.3"x7.3" / 185x185mm	\$2,250.00
LTB 2602e	2600g	0.01g	7.3"x7.3" / 185x185mm	\$1,050.00
LTB 3602e	3600g	0.01g	7.3"x7.3" / 185x185mm	\$1,155.00
LTB 4602e	4600g	0.01g	7.3"x7.3" / 185x185mm	\$1,290.00
LTB 6002e	6000g	0.01g	7.3"x7.3" / 185x185mm	\$2,025.00
LBB 6001e	6000g	0.1g	7.3"x7.3" / 185x185mm	\$1,235.00
LBB 8001e	8000g	0.1g	7.3"x7.3" / 185x185mm	\$1,345.00
LBB 12001e	12000g	0.1g	7.3"x7.3" / 185x185mm	\$1,825.00
LBB 15001e	15000g	0.1g	7.3"x7.3" / 185x185mm	\$2,060.00

NOTE: Draft shield not included with LTB/LBB (top loader) models.

Models ending in:

i: Internal Calibration

e: External Calibration



Anti-Vibration Table

See pg. 92



LBL




LBL with Pillar

Offering ethernet connectivity, the Luna LBL combines the rugged durability of a heavy-duty base with the vivid, unmistakable clarity of the large, Luna-style weight display. The LBL is available in high capacities, while retaining a fine 0.1g readability.



LCD display with large, bright digits on a black background

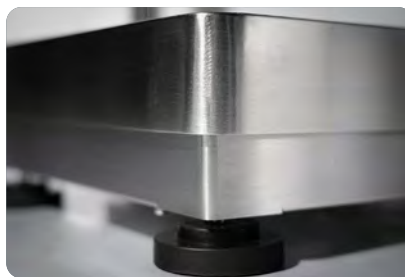

Robust, heavy-duty base with grade 304 stainless steel weighing pan




Send weight data to printers/PCs via RS-232, USB or Ethernet


Features

- Heavy duty weighing base and large, crystal-clear weight display
- Sealed keypad protects against dirt and spills
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Connect to a computer network with the RJ45 ethernet connector
- Optional weigh-below hook for suspended weighing
- Lockdown device to secure balance
- Selectable digital filtering helps minimize effects of vibration and disturbances
- Zero-tracking feature ensures display returns to zero reading
- Multilingual display allows use in many different countries


General Specifications

- Weighing units: g, kg, mg, ct, GN, N, lb, oz, lb:oz, ozt, dwt, T, custom unit
- Interface: RS-232, USB, Ethernet RJ45
- Power supply: 18VDC 830mA adapter, internal rechargeable battery (optional)
- Battery life (up to): 50 hours
- Display: Backlit LCD with 0.9" / 24mm-high digits
- Calibration: External
- Housing: ABS plastic indicator, die-cast aluminum weighing base
- Operating temperature: 15° to 35°C / 59° to 95°F



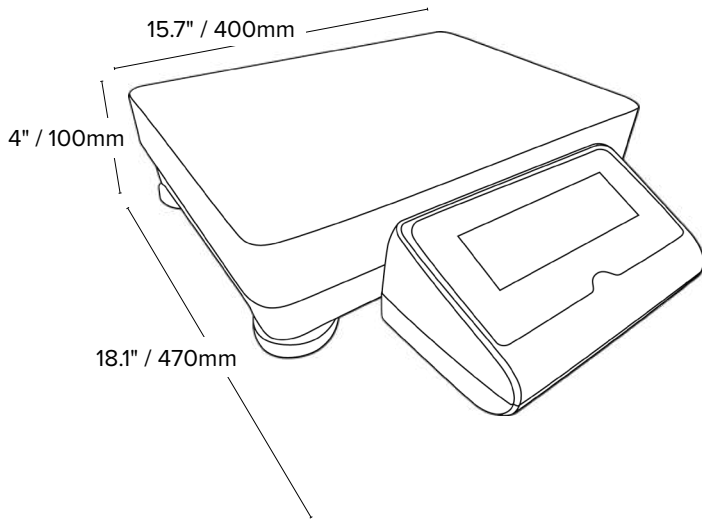

LBL w/ Body-Mounted Display

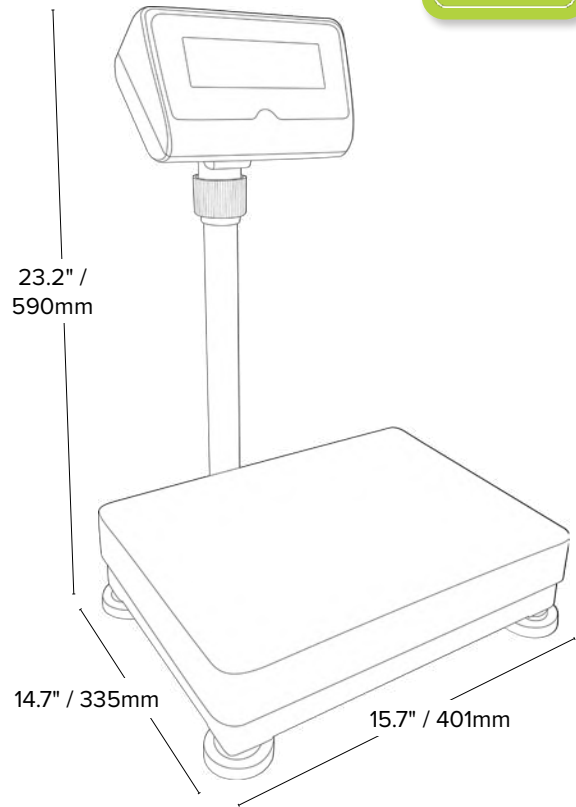

LBL w/ Pillar-Mounted Display

Model	Capacity	Readability	Pan Size	List Price
LBL 14001e	14kg	0.1g	11.8"x15.7" / 400x300mm	\$2,335.00
LBL 24001e	24kg	0.1g	11.8"x15.7" / 400x300mm	\$3,795.00
LBL 34001e	34kg	0.1g	11.8"x15.7" / 400x300mm	\$4,530.00
LBL 14001P	14kg	0.1g	11.8"x15.7" / 400x300mm	\$2,455.00
LBL 24001P	24kg	0.1g	11.8"x15.7" / 400x300mm	\$3,925.00
LBL 34001P	34kg	0.1g	11.8"x15.7" / 400x300mm	\$4,665.00




NBL with Pillar

Designed to be durable, Nimbus heavy-duty precision balances feature a solid metal base with a rugged indicator that can easily withstand rigorous daily use. Navigation buttons are large and color-coded, helping users operate the balance with minimal training.



Sealed keypad protects against dirt and spills

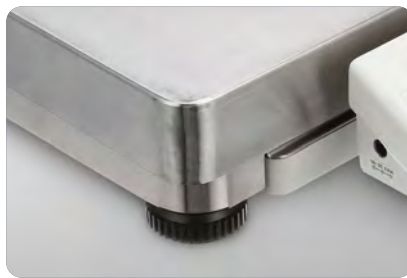

Large, grade 304 stainless steel pan for precision weighing to higher capacities



USB and RS-232 interfaces for speedy connection to printers and PCs


Features

- Vivid, backlit LCD easily visible in any lighting conditions
- Security password control prevents unauthorized access
- Multilingual display permits use in various regions
- Hook available for weighing below the balance
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Capacity tracker built into display for easily monitoring possible overloads
- Selectable digital filtering helps minimize effects of vibration and disturbances
- Overload protection helps prevent damage to internal components


General Specifications

- Weighing units: g, kg, ct, GN, N, lb, oz, lb:oz, ozt, dwt, custom unit
- Interface: RS-232, USB
- Power supply: 18VDC 830mA adapter
- Display: Backlit LCD with 0.8" / 20mm-high digits
- Calibration: External
- Housing: ABS plastic indicator, aluminum extruded lower case, die-cast aluminum upper case and base
- Operating temperature: 0° to 40°C / 32° to 104°F



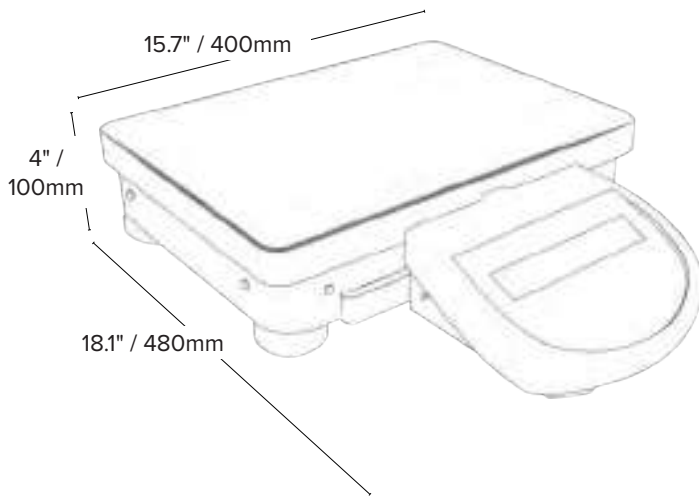

NBL Body-Mounted Display

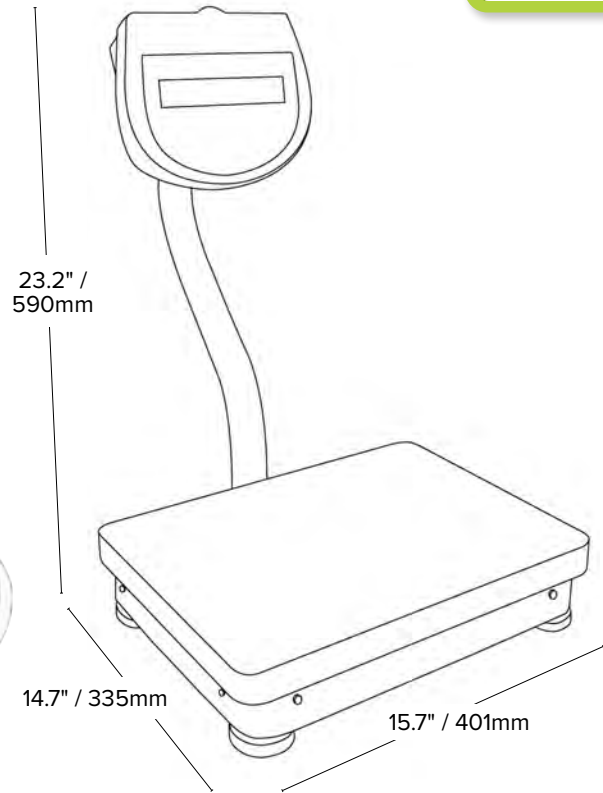

NBL Pillar-Mounted Display

Model	Capacity	Readability	Pan Size	List Price
NBL 12001e	12000g	0.1g	11.8"x15.7" / 400x300mm	\$2,175.00
NBL 16001e	16000g	0.1g	11.8"x15.7" / 400x300mm	\$2,685.00
NBL 22001e	22000g	0.1g	11.8"x15.7" / 400x300mm	\$3,695.00
NBL 32001e	32000g	0.1g	11.8"x15.7" / 400x300mm	\$3,695.00
NBL 12001P	12000g	0.1g	11.8"x15.7" / 400x300mm	\$2,310.00
NBL 16001P	16000g	0.1g	11.8"x15.7" / 400x300mm	\$2,815.00
NBL 22001P	22000g	0.1g	11.8"x15.7" / 400x300mm	\$3,820.00

20 COMPACT BALANCES

Adam Equipment's portable compact precision balances are the right choice for labs, classrooms, field settings or manufacturing operations. Lightweight and easy to operate, they are powered by AC adapter or battery, allowing use in the field or at remote testing locations where electricity is unavailable.

Compact balances are well-suited for performing basic mass measurement in general science lessons, chemistry labs and physics classrooms. Models with a special stackable design are an excellent solution for labs or classrooms with limited space. Plus, Adam balances can perform quality control tasks and measurement for packaging and filling in small manufacturing facilities or food processing plants.

HIGHLAND
HCB



pg.20

MODEL QUICK FINDER

	CQT	HCB	CBX	CB	DCT	TBB
Stainless steel weighing pan	•	•	•	•		•
RS-232/USB interface		•				
Sealed keypad	•	•	•	•	•	
Internal rechargeable battery		•	•			
Battery power	•			•	•	
Stackable for easy storage	•	•				
ShockProtect® overload protection	•	•				
Internal automatic calibration		•				

No balance can beat the Core for basic weighing value. Core's housing is simple to clean and designed to stack for easy storage. A basic keypad with dual tare keys makes Core balances easy to use.



CQT Large Pan Model (Draft Shield n/a)



Large, grade 304 stainless steel pan for easy cleaning



ShockProtect® helps protect internal components from damage if overloaded



120mm pan models offer a stackable design for easy storage


Features

- Vivid backlit LCD easily visible in any lighting conditions
- Hook included for weighing below the balance
- Audible overload alarm warns when capacity is exceeded
- Zero-tracking feature ensures display returns to zero reading
- Security slot for optional security lock and cable to help prevent theft

General Specifications

- Weighing units: g, kg, lb, oz, N, GN, ct, dr, tL.T
- Power supply: 12VDC 500mA adapter (included), 6 x AA Batteries (not included)
- Display: Backlit LCD with 0.7" / 18mm-high digits
- Calibration: External
- Housing: ABS Plastic
- Operating temperature: 0° to 40°C / 32° to 104°F

Model	Capacity	Readability	Pan Size	List Price
CQT 202	200g	0.01g	4.7" / 120mm ø	\$360.00
CQT 251	250g	0.1g	4.7" / 120mm ø	\$220.00
CQT 601	600g	0.1g	4.7" / 120mm ø	\$300.00
CQT 1501	1500g	0.1g	4.7" / 120mm ø	\$370.00
CQT 2601	2600g	0.1g	5.7" / 145mm ø	\$415.00
CQT 2000	2000g	1g	5.7" / 145mm ø	\$210.00
CQT 5000	5000g	1g	5.7" / 145mm ø	\$285.00

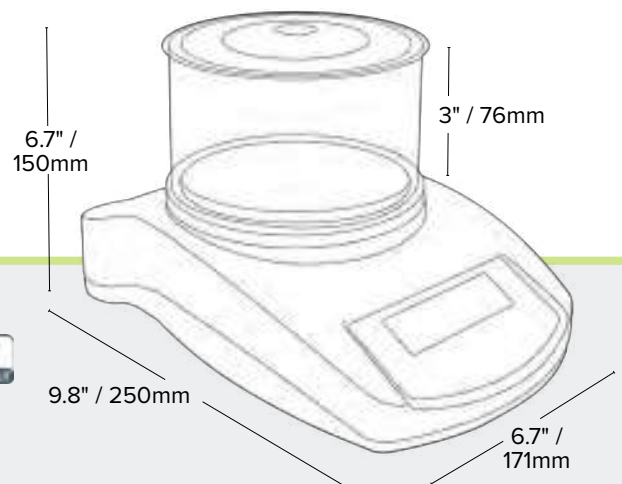

Highland precision balances are well-suited for lab work, field use, and many industrial applications. Designed to be stackable for easy storage, the Highland features Shockprotect® as a safeguard against shock loading and accidental overload.



HCB Large Pan Model
(Draft Shield n/a)



USB-B and RS-232 for speedy communication with printers and PCs



ShockProtect® helps protect internal components from overload damage



Stackable design for easy storage of multiple units (except HCB 6001)

Features

- Vivid, backlit LCD easily visible in any lighting conditions
- Audible overload alarm warns when capacity is exceeded
- Solid ABS housing is durable for industrial use
- Capacity tracker built into display for easily monitoring possible overloads
- Hook included for weighing below the balance (non-trade-approved models only)
- Zero-tracking feature ensures display returns to zero reading
- Parts counting with preset sample sizes
- Memory accumulation totals results
- Selectable digital filtering helps minimize effects of vibration and disturbances
- HandiCal® internal calibration eliminates need for external weight set



General Specifications

- Weighing units:
HCB: g, lb, oz, N, GN, ct, dr, dwt, mm, ozt, T, tl.H, tl.S, tl.T
HCBaM: g, ct, oz, ozt, gr, kg*, lb*
- Interface: RS-232, USB
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 24 hours
- Display: Backlit LCD with 0.7" / 18mm-high digits
- Calibration: External, Internal*
- Housing: ABS Plastic
- Operating temperature:
HCB: 0° to 40°C / 32° to 104°F
HCBaM: 15° to 35°C / 59° to 95°F

*only available on HCB 1202aM, 3001aM, and 5001aM



**Not available for trade approved models

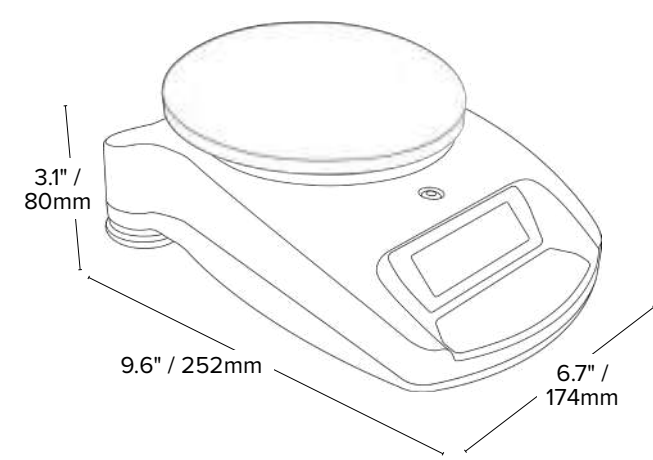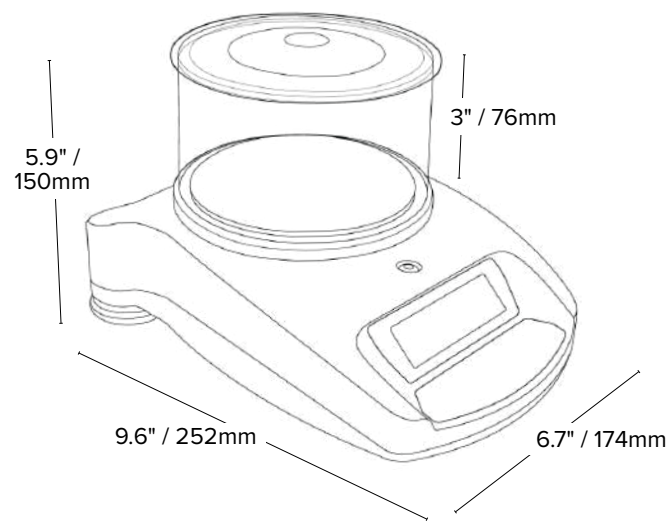

HCB Precision Balance w/ Draft Shield

HCB 6001 Precision Balance

Model	Capacity	Readability	Pan Size	List Price
HCB 123	120g	0.001g	4.7" / 120mm ø	\$610.00
HCB 153	150g	0.005g	4.7" / 120mm ø	\$530.00
HCB 302	300g	0.01g	4.7" / 120mm ø	\$530.00
HCB 602	600g	0.02g	4.7" / 120mm ø	\$530.00
HCB 602H	600g	0.01g	4.7" / 120mm ø	\$660.00
HCB 1002	1000g	0.01g	4.7" / 120mm ø	\$775.00
HCB 1502	1500g	0.05g	4.7" / 120mm ø	\$615.00
HCB 2202	2200g	0.01g	4.7" / 120mm ø	\$915.00
HCB 3001	3000g	0.1g	4.7" / 120mm ø	\$530.00
HCB 6001	6000g	0.1g	5.7" / 145mm ø	\$735.00

Trade Approved Models

Model	Capacity	Readability	Pan Size	List Price
HCB 103aM	100g	d=0.001g e=0.01g	4.7" / 120mm ø	\$775.00
HCB 302aM	300g	d=0.05g e=0.05g	4.7" / 120mm ø	\$650.00
HCB 602aM	600g	d=0.01g e=0.1g	4.7" / 120mm ø	\$680.00
HCB 1202aM	1200g	d=0.01g e=0.1g	4.7" / 120mm ø	\$795.00
HCB 3001aM	3000g	d=0.5g e=0.5g	4.7" / 120mm ø	\$660.00
HCB 5001aM	5000g	d=0.5g e=0.5g	4.7" / 120mm ø	\$680.00

NOTE: The "d" value is the scale's smallest standard displayed division. For approved models, the "e" value is the verification scale interval, which is the smallest scale increment that can be used to determine price by weight in commercial transactions.

Models ending in:
H: High-readability model



Hard Carrying Case
See pg. 94



KEY ACCESSORIES



Calibration Certificate
See pg. 95

CBX portable balances offer a standard USB-rechargeable battery for convenient charging. Sturdy construction and easy operation deliver reliable weighing and counting results.



Vivid, backlit LCD easily visible in any lighting conditions



Low-voltage USB input for flexibility powering the device



Grade 304 stainless steel pan for quick and easy cleaning


Features

- Solid ABS housing is durable for industrial use
- Simple key operation allows for easy set up and operation
- Rechargeable battery included for operation almost anywhere
- Parts counting with preset sample sizes

General Specifications

- Weighing units: g, N, lb, oz
- Power supply: USB option, 5VDC 1A adapter, Internal rechargeable battery
- Display: Backlit LCD with 0.7" / 18mm-high digits
- Calibration: External
- Housing: ABS Plastic
- Operating temperature: 0° to 40°C / 32° to 104°F

Model	Capacity	Readability	Pan Size	List Price
CBX 1201	1200g	0.1g	5.8"x5.8" / 148x148mm	\$175.00
CBX 3001	3000g	0.5g	5.8"x5.8" / 148x148mm	\$175.00
CBX 6000	6000g	1g	5.8"x5.8" / 148x148mm	\$175.00

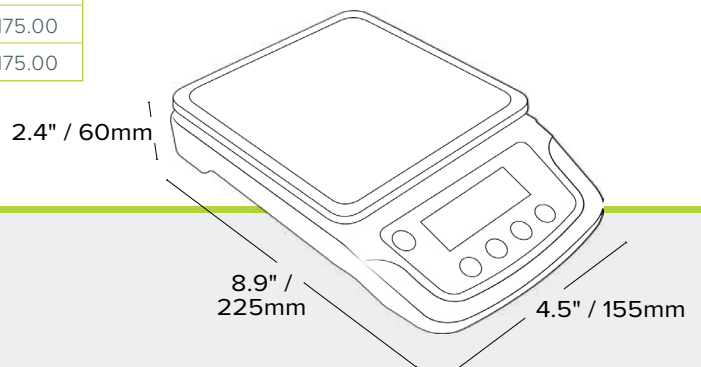



KEY ACCESSORIES



Power Adapter
See pg. 88

The CB compact balance boasts best-in-class performance and value. Its grade 304 stainless steel pan, sealed keypad and one-piece housing are easy to clean.



Vivid, backlit LCD easily visible in any lighting conditions



Grade 304 stainless steel pan for quick and easy cleaning



Optional battery operation for portability and flexibility


Features

- Lightweight design simplifies transport and portability
- Sealed keypad protects against dirt and spills
- Simple operation allows quick startup and use with little or no training
- Zero-tracking feature ensures display returns to zero reading

General Specifications

- Weighing units: g, lb, oz
- Power supply: 2 x AA Batteries (included), 6VDC 200mA adapter (optional)
- Display: LCD with 0.5" / 12mm-high digits
- Calibration: External
- Housing: ABS Plastic
- Operating temperature: 0° to 40°C / 32° to 104°F

Model	Capacity	Readability	Pan Size	List Price
CB 501	500g	0.1g	5.1" / 130mm ø	\$125.00
CB 1001	1000g	0.1g	5.1" / 130mm ø	\$145.00
CB 3000	3000g	1g	5.1" / 130mm ø	\$135.00

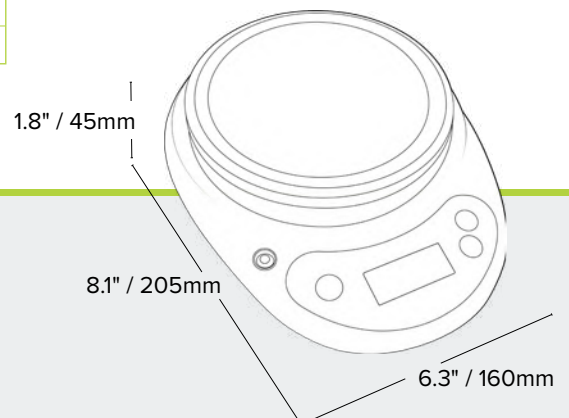



KEY ACCESSORIES



Calibration Certificate
See pg. 95

With a user-friendly, low-profile design, the Dune compact balance offers simple operation using just three buttons: on/off, unit, and tare. The portable Dune delivers reliable readings in the lab or field.



High contrast display easily visible from a distance



Compact, lightweight design for use anywhere



Large pan removes easily for speedy cleaning

Features


- Color-coded keys facilitate quick recognition of the most frequently used buttons
- Overload protection helps prevent damage to internal components
- Sealed keypad protects against dirt and spills
- Zero-tracking feature ensures display returns to zero reading

General Specifications

- Weighing units: g, lb*, oz
- Power supply: 12VDC 500mA adapter, 6 x AA Batteries (not included)
- Display: LCD with 0.6" / 15mm-high digits
- Calibration: External
- Housing: ABS Plastic
- Operating temperature: 0° to 40°C / 32° to 104°F

*lb not available in DCT 201

Model	Capacity	Readability	Pan Size	List Price
DCT 201	200g	0.1g	5.7"x5.7" / 145x145mm	\$140.00
DCT 2000	2000g	1g	5.7"x5.7" / 145x145mm	\$140.00
DCT 5000	5000g	2g	5.7"x5.7" / 145x145mm	\$145.00

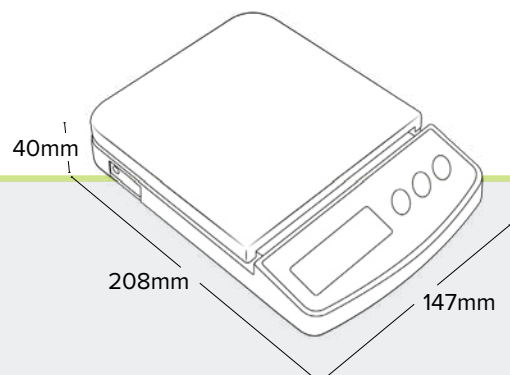



KEY ACCESSORIES



Weigh-Below Hook
See pg. 95

Adam Equipment's patented TBB triple beam balance offers superb value for teaching mass measurement concepts. Sturdy metal housing and grade 304 stainless steel pan help the balance withstand daily student use.



Large, grade 304 stainless steel pan for easy cleaning



Supplied with tripod legs for using a weigh-below hook*



Handy storage space for counter weights

Features



- Magnetic damping slows pointer movement for faster readings
- Notched, tiered, graduated beams ensure positive positioning and accurate reading of results
- Security slot for optional lock and cable to help prevent theft
- Optional hook enables below-balance weighing with legs attached
- The TBB 2610T is equipped with a 225g tare range

General Specifications

- Weighing units: g
- Display: Graduated beam with 0.3" / 7mm-high digits
- Calibration: External
- Housing: Die-cast aluminum

Model	Capacity	Readability	Pan Size	List Price
TBB 610S	610g	0.1g	6.0" / 152mm ø	\$165.00
TBB 2610S	2610g	0.1g	6.0" / 152mm ø	\$200.00
TBB 2610T	2610g	0.1g	6.0" / 152mm ø	\$215.00

*TBB 610S Does not include weights or leg attachments

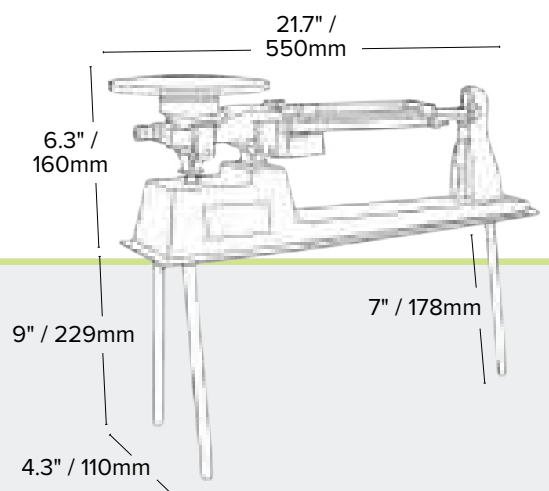

28 MOISTURE ANALYZERS

Fast and efficient, the PMB Moisture Analyzer by Adam Equipment provides an alternative to the time-consuming method of oven testing. The PMB not only hastens the drying process, it minimizes the risk of burning a sample, which can produce false results.

PMB uses the “loss-on-drying” technique to simultaneously weigh and heat the sample, reducing the testing period and providing greater measurement accuracy. In many cases, the PMB can replace traditional oven testing and also the Karl Fischer titration method of analyzing moisture.



Fast Heating
400-watt halogen bulb
heats samples quickly



Pan Lifter
Pan lifter allows easy sample
placement and removal



Clear Results
Easy to read backlit LCD with built-in
capacity tracker for potential overloads



KEY ACCESSORIES



Temp Calibration Kit
See pg. 94



Sample Pans
See pg. 88

With simple operation and rapid response time, the PMB offers top value in moisture analysis. USB and RS-232 interfaces facilitate connectivity, while a second USB port allows storage of test programs and data on flash drives.



USB host for memory card, USB I/O and RS-232 interfaces



Four preset drying methods allow test routines for a wide variety of samples



Pan lifter allows easy placement and removal of samples



Features

- Scratch-resistant aluminum housing
- Temperature range 50°C to 160°C in one-degree increments
- Three settings for heating sample include ramp-up, stepped temperatures and single temperature
- Audible overload alarm warns when capacity is exceeded
- Multilingual display permits use in various regions
- Internal memory stores 49 different recipes and up to 99 test results, and additional test results and settings can be stored on a flash drive

General Specifications

- Weighing units: g, %M, %S, ATRO %M, ATRO %S
- Interface: RS-232, USB
- Power supply: Power cord
- Display: Backlit LCD with 0.9" / 24mm-high digits
- Calibration: External
- Housing: Die-cast aluminum lower housing, glass-filled plastic chamber housing
- Operating temperature: 0° to 40°C / 32° to 104°F
- Minimum sample weight: 1% of capacity

Model	Capacity	Readability	Pan Size	List Price
PMB 53	50g	0.001g / 0.01%	3.9" / 100mm ø	\$3,215.00
PMB 163	160g	0.001g / 0.01%	3.9" / 100mm ø	\$3,750.00
PMB 202	200g	0.01g / 0.05%	3.9" / 100mm ø	\$3,490.00

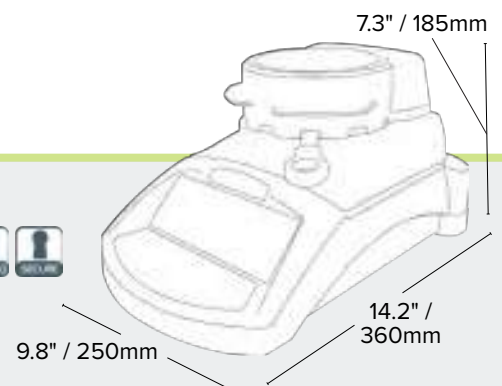

30 BENCH & FLOOR SCALES



Adam Equipment's durable bench and floor scales are dependable weighing solutions for a wide variety of industries. Simple to operate, these industrial scales offer the functions and features needed to improve efficiency and increase productivity in factories and warehouses, on assembly lines or loading docks, during shipping and receiving activities, and at manufacturing locations.

Available in a range of capacities and readabilities, Adam's bench and floor scales have sturdy stainless steel weighing pans and platforms in a choice of sizes to meet your needs – from basic weighing to checkweighing, packaging and monitoring inventory, and performing quality control tasks.

NEW

BTT BENCH & FLOOR SCALES



pg.42

MODEL QUICK FINDER

	LBX	CKT	CPWplus	GFK & GBK	AGB & AGF	BKT	BTT
Stainless steel weighing pan	•	•	•	•	•	•	•
RS-232 interface		•	•	•	•	•	•
Sealed keypad	•	•	•	•	•	•	
Checkweighing function	•	•		•	•	•	•
Built-in printer						•	•
Optional Printer		•	•	•	•	•	•
Memory accumulation function		•		•		•	•



KEY ACCESSORIES




Hard Carrying Case
See pg. 94



In-Use Cover
See pg. 99

With simple operation and a variety of modes, our robust, dependable Latitude compact bench scales deliver excellent value for quick, basic weighing and counting needs.

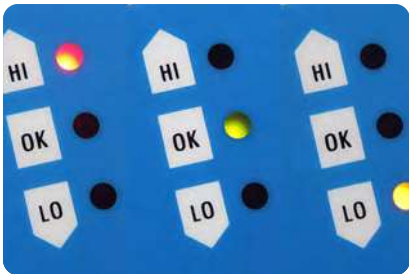

Checkweighing LEDs show under, over or within limits



Rugged construction stands up to industrial use



Rechargeable battery included for operation almost anywhere


Features

- Vivid, backlit LCD easily visible in any lighting conditions
- Overload protection helps prevent damage to internal components
- Sealed keypad protects against dirt and spills
- Large, grade 304 stainless steel pan allows for swift cleaning
- Checkweighing with audible alarm
- Hold function freezes the displayed weight
- Basic parts counting with preset sample sizes
- Simple operation allows quick startup and use with little or no training

General Specifications

- Weighing units: g, kg, lb, lb:oz, oz
- Power supply: 5VDC 1A adapter, Internal rechargeable battery
- Battery life (up to): 210 hours
- Display: Backlit LCD with 0.9" / 24mm-high digits
- Calibration: External
- Housing: ABS Plastic
- Operating temperature: 0° to 40°C / 32° to 104°F

Model	Capacity	Readability	Pan Size	List Price
LBX 3	6lb / 3kg	0.001lb / 0.5g	7.1"x9.6" / 245x180mm	\$255.00
LBX 6	12lb / 6kg	0.002lb / 1g	7.1"x9.6" / 245x180mm	\$255.00
LBX 12	25lb / 12kg	0.005lb / 2g	7.1"x9.6" / 245x180mm	\$255.00
LBX 30	65lb / 30kg	0.01lb / 5g	7.1"x9.6" / 245x180mm	\$255.00

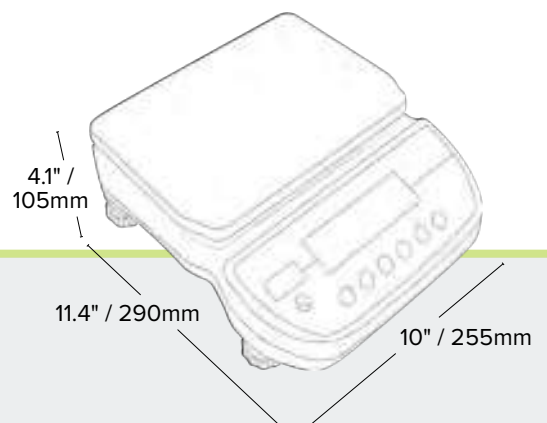



KEY ACCESSORIES



Large & Small Scoops
See pg. 94



Hard Carrying Case
See pg. 94

Ideal for inventory control or packaging tasks, the Cruiser CKT can save money by reducing waste and overages. Repetitive checkweighing tasks are accomplished quickly with a backlit display that changes color to show if a sample is under, over, or within the preset limits.



Display changes color for quick notification of checkweighing limits



Checkweighing function features audible alarm



Sealed keypad protects against dirt and spills


Features


- Large, grade 304 stainless steel pan allows for quick cleaning
- Rechargeable battery included for operation almost anywhere
- Internal counting resolution 1:1,600,000 for precise results
- RS-232 for speedy communication to PCs and printers
- Optional USB interface for data communication
- Solid ABS housing for industrial use
- Drip channels help divert spills away from internal components
- Parts counting optimization automatically refines piece weight as parts are added
- Piece counting with freely selectable sample sizes
- Preset tare function
- Optional weigh-below hook ideal for materials testing applications

General Specifications

- Weighing units*:
CKT: g, kg, lb, oz, lb:oz
CKTM: lb, oz, g, kg
- Interface: RS-232, Optional USB
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 100 hours
- Display: Backlit LCD with 0.6" / 15mm-high digits
- Calibration: External
- Housing: ABS Plastic
- Operating temperature: -10° to 40°C / 32° to 104°F
- PLUs: 150

*lb:oz is not a legal-for-trade weighing unit



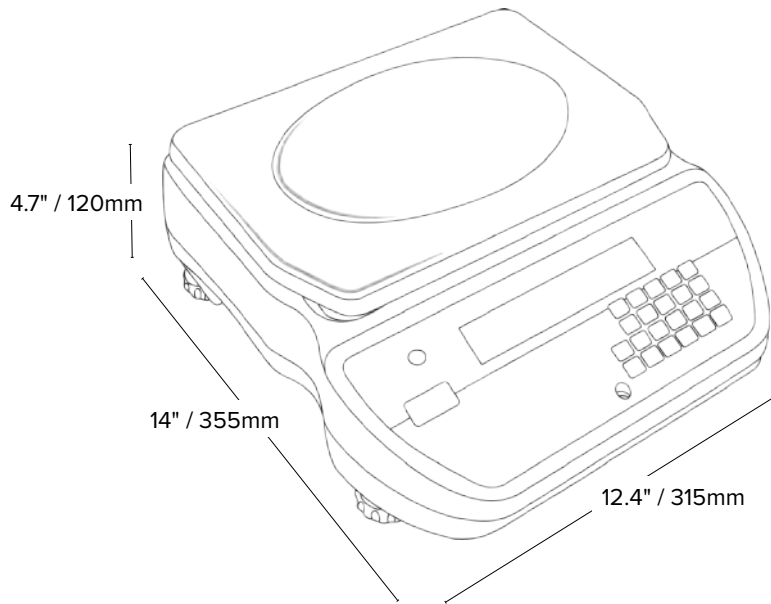

Model	Capacity	Readability	Pan Size	List Price
CKT 4	8lb / 4kg	0.0002lb / 0.1g	11.8"x8.3" / 300x210mm	\$595.00
CKT 8	16lb / 8kg	0.0005lb / 0.2g	11.8"x8.3" / 300x210mm	\$595.00
CKT 8H	16lb / 8kg	0.0002lb / 0.1g	11.8"x8.3" / 300x210mm	\$690.00
CKT 16	35lb / 16kg	0.001lb / 0.5g	11.8"x8.3" / 300x210mm	\$595.00
CKT 32	70lb / 32kg	0.002lb / 1g	11.8"x8.3" / 300x210mm	\$595.00
CKT 48	100lb / 48kg	0.005lb / 2g	11.8"x8.3" / 300x210mm	\$595.00
CKT 8UH	16lb / 8kg	0.0001lb / 0.05g	11.8"x8.3" / 300x210mm	\$725.00
CKT 16UH	35lb / 16kg	0.0002lb / 0.1g	11.8"x8.3" / 300x210mm	\$725.00
CKT 32UH	70lb / 32kg	0.0005lb / 0.2g	11.8"x8.3" / 300x210mm	\$725.00
CKT 48UH	100lb / 48kg	0.001lb / 0.5g	11.8"x8.3" / 300x210mm	\$725.00

Trade Approved Models

Model	Capacity	Readability	Pan Size	List Price
CKT 4M	8lb / 4kg	0.002lb / 1g	11.8"x8.3" / 300x210mm	\$680.00
CKT 8M	16lb / 8kg	0.004lb / 2g	11.8"x8.3" / 300x210mm	\$680.00
CKT 20M	44lb / 20kg	0.01lb / 5g	11.8"x8.3" / 300x210mm	\$680.00
CKT 40M	88lb / 40kg	0.02lb / 10g	11.8"x8.3" / 300x210mm	\$680.00



DID YOU KNOW?

Cruiser CKT bench scales are commonly used for trade approved applications – where item price is determined by weight. For such tasks a trade approved scale is required by law. Choose from our 'M' models above!

Models ending in:

H: High-readability model

UH: Ultra-high readability model



CPWplus Standard

Durable and versatile, CPWplus weighing scales feature a wide selection of sizes and configurations. The CPWplus is able to accommodate many industrial jobs, including concrete testing in the field, warehouse tasks or shipping and receiving duties, as well as animal weighing within veterinary practices, zoos and at home.



CPWplus P



CPWplus M



CPWplus W



CPWplus L



Grade 304 stainless steel base available in three sizes



Separate indicator can be wall-mounted with the included bracket



Hold function freezes the display, allowing time to elapse without losing the result


Features

- Splash-proof housing, keypad and display are easy to clean
- "L" models feature handles and wheels on the base for transportation
- Selectable digital filtering helps minimize effects of vibration and disturbances
- Zero-tracking feature ensures display returns to zero reading


General Specifications

- Weighing units: kg, lb, lb:oz, oz
- Interface: RS-232
- Power supply:
 - Standard and P Models: 12VDC 500mA adapter, 6 x AA Batteries (not included)
 - L, M and W Models: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life* (up to): 210 hours
- Display: Backlit LCD with 0.9" / 22mm-high digits
- Calibration: External
- Housing: Mild steel base with aluminum extrusion display
- Operating temperature: 0° to 40°C / 32° to 104°F


*L, M and W models only




*L, M and W models only

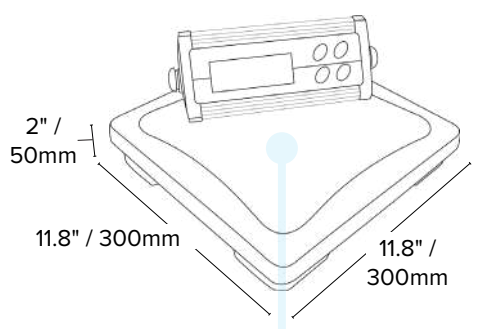


CPWplus - Standard

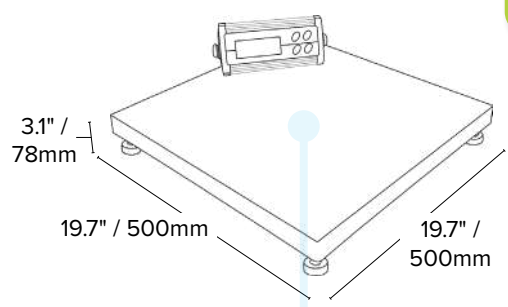


CPWplus M

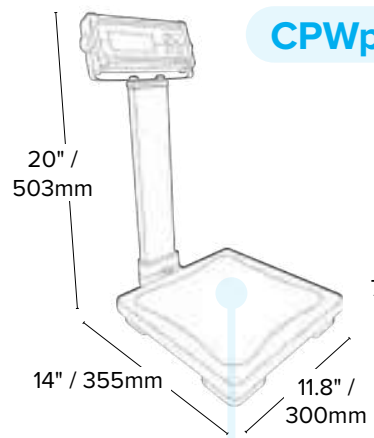

CPWplus P

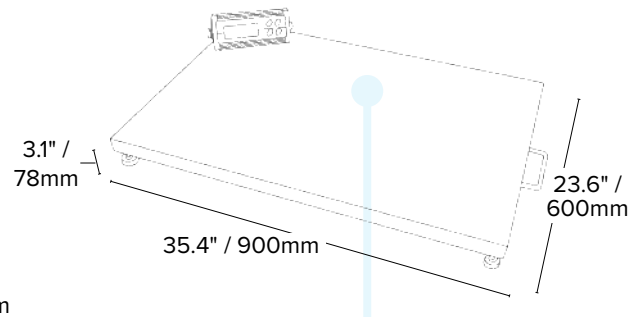

CPWplus L

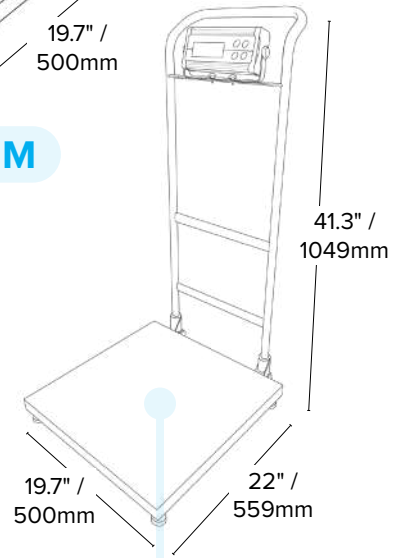

CPWplus W

Model	Capacity	Readability	Pan Size	List Price
CPWplus 6	13lb / 6kg	0.005lb / 0.002kg	11.8"x11.8" / 300x300mm	\$235.00
CPWplus 15	33lb / 15kg	0.01lb / 0.005kg	11.8"x11.8" / 300x300mm	\$250.00
CPWplus 35	75lb / 35kg	0.02lb / 0.01kg	11.8"x11.8" / 300x300mm	\$250.00
CPWplus 75	165lb / 75kg	0.05lb / 0.02kg	11.8"x11.8" / 300x300mm	\$250.00
CPWplus 150	330lb / 150kg	0.1lb / 0.05kg	11.8"x11.8" / 300x300mm	\$265.00
CPWplus 200	440lb / 200kg	0.1lb / 0.05kg	11.8"x11.8" / 300x300mm	\$290.00
CPWplus 6P	13lb / 6kg	0.005lb / 0.002kg	11.8"x11.8" / 300x300mm	\$350.00
CPWplus 15P	33lb / 15kg	0.01lb / 0.005kg	11.8"x11.8" / 300x300mm	\$360.00
CPWplus 35P	75lb / 35kg	0.02lb / 0.01kg	11.8"x11.8" / 300x300mm	\$360.00
CPWplus 75P	165lb / 75kg	0.05lb / 0.02kg	11.8"x11.8" / 300x300mm	\$360.00
CPWplus 150P	330lb / 150kg	0.1lb / 0.05kg	11.8"x11.8" / 300x300mm	\$370.00
CPWplus 200P	440lb / 200kg	0.1lb / 0.05kg	11.8"x11.8" / 300x300mm	\$390.00
CPWplus 35M	75lb / 35kg	0.02lb / 0.01kg	19.7"x19.7" / 500x500mm	\$420.00
CPWplus 75M	165lb / 75kg	0.05lb / 0.02kg	19.7"x19.7" / 500x500mm	\$435.00
CPWplus 150M	330lb / 150kg	0.1lb / 0.05kg	19.7"x19.7" / 500x500mm	\$460.00
CPWplus 200M	440lb / 200kg	0.1lb / 0.05kg	19.7"x19.7" / 500x500mm	\$480.00
CPWplus 35W	75lb / 35kg	0.02lb / 0.01kg	19.7"x19.7" / 500x500mm	\$500.00
CPWplus 75W	165lb / 75kg	0.05lb / 0.02kg	19.7"x19.7" / 500x500mm	\$510.00
CPWplus 150W	330lb / 150kg	0.1lb / 0.05kg	19.7"x19.7" / 500x500mm	\$520.00
CPWplus 200W	440lb / 200kg	0.1lb / 0.05kg	19.7"x19.7" / 500x500mm	\$545.00
CPWplus 35L	75lb / 35kg	0.02lb / 0.01kg	35.4"x23.6" / 900x600mm	\$610.00
CPWplus 75L	165lb / 75kg	0.05lb / 0.02kg	35.4"x23.6" / 900x600mm	\$620.00
CPWplus 150L	330lb / 150kg	0.1lb / 0.05kg	35.4"x23.6" / 900x600mm	\$630.00
CPWplus 200L	440lb / 200kg	0.1lb / 0.05kg	35.4"x23.6" / 900x600mm	\$655.00
CPWplus 300L	660lb / 300kg	0.2lb / 0.1kg	35.4"x23.6" / 900x600mm	\$680.00

Features for Models ending in:

- P: Pillar Mount
- M: Medium Pan
- W: Frame Mount
- L: Large Pan



Non-slip Rubber Mat
See pg. 89

Ideal for industrial settings, GBK and GFK checkweighing scales are the answer for businesses that need heavy-duty durability and speed. Available in Standard or Plus set-ups, with a color changing backlight to make checkweighing even easier, or a trade-approved option with LED "traffic light" design.



Choose between a simple, 5-button or full numeric keypad layout



Backlight changes color for quick notification of checkweighing limits



GKaM indicator features "traffic light" checkweighing LEDs and audible alarm

Common Features

- Unmistakable results every time from a bright, clear display
- Basic parts counting with freely selectable sample sizes
- Sealed keypad to protect against dirt and spills
- RS-232 (and optional USB) interfaces provide speedy connection to computers and printers
- Parts counting optimization automatically refines piece weight as parts are added
- Capacity tracker built into display for easily monitoring possible overloads
- Memory accumulation totals results
- 1:1,000,000 internal counting resolution for precise results

General Specifications


- Weighing units*: g†, kg, lb, lb:oz, oz
- Interface: RS-232, Optional USB
- Power supply:
 - Plus: Power cord, internal rechargeable battery
 - S/GKaM: 12VDC 800mA adapter, internal rechargeable battery (optional for S)
- Battery life (up to): 120 hours
- Display:
 - S/Plus: LCD with 1.6" / 40mm-high digits
 - GKaM: LCD with 0.8" / 20mm-high digits
- Calibration: External
- Housing: ABS Plastic indicator with mild steel base
- Operating temperature: -10° to 40°C / 14° to 104°F

*lb:oz is not a legal-for-trade weighing unit

†g only available in 8, 16 and 32 models



**Not available for S models

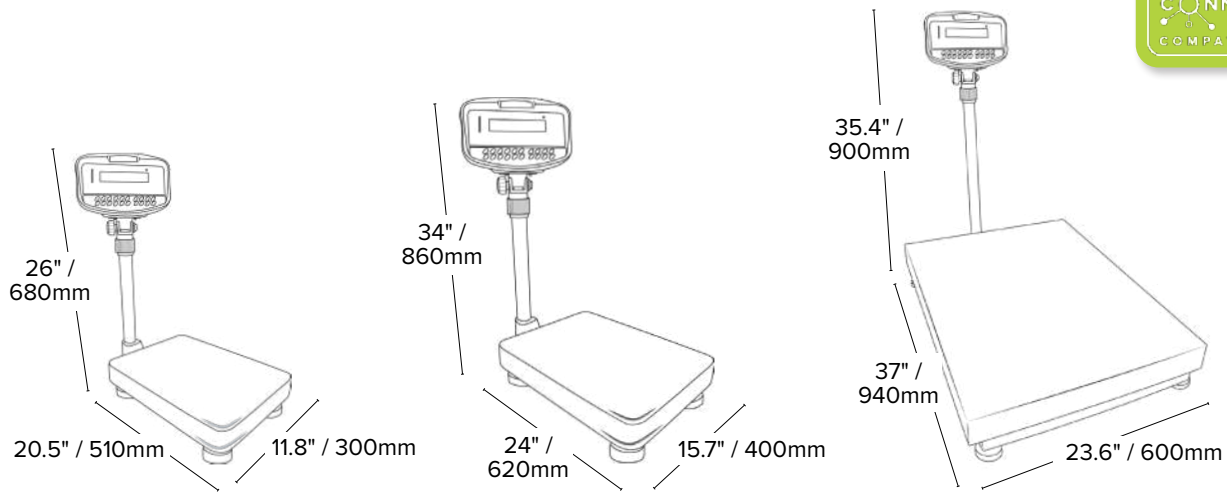

GBK Bench Scale

GFK Floor Scale

GFK-S-/Plus 600 Floor Scale

Model	Capacity	Readability	Pan Size	List Price
GBK-S 8	16lb / 8kg	0.0002lb / 0.1g	15.7"x11.8" / 400x300mm	\$875.00
GBK-S 16	35lb / 16kg	0.001lb / 0.5g	15.7"x11.8" / 400x300mm	\$735.00
GBK-S 32	70lb / 32kg	0.002lb / 1g	15.7"x11.8" / 400x300mm	\$805.00
GBK-S 60	130lb / 60kg	0.005lb / 2g	15.7"x11.8" / 400x300mm	\$805.00
GBK-S 120	260lb / 120kg	0.01lb / 5g	15.7"x11.8" / 400x300mm	\$855.00
GFK-S 75	165lb / 75kg	0.01lb / 5g	19.7"x15.7" / 500x400mm	\$910.00
GFK-S 75H	165lb / 75kg	0.002lb / 1g	19.7"x15.7" / 500x400mm	\$1,295.00
GFK-S 150	330lb / 150kg	0.02lb / 0.01kg	19.7"x15.7" / 500x400mm	\$910.00
GFK-S 150H	330lb / 150kg	0.005lb / 2g	19.7"x15.7" / 500x400mm	\$1,295.00
GFK-S 300	660lb / 300kg	0.05lb / 0.02kg	19.7"x15.7" / 500x400mm	\$995.00
GFK-S 600	1320lb / 600kg	0.1lb / 0.05kg	31.5"x23.6" / 800x600mm	\$1,335.00

Model	Capacity	Readability	Pan Size	List Price
GBK-Plus 8	16lb / 8kg	0.0002lb / 0.1g	15.7"x11.8" / 400x300mm	\$1,030.00
GBK-Plus 16	35lb / 16kg	0.001lb / 0.5g	15.7"x11.8" / 400x300mm	\$890.00
GBK-Plus 32	70lb / 32kg	0.002lb / 1g	15.7"x11.8" / 400x300mm	\$960.00
GBK-Plus 60	130lb / 60kg	0.005lb / 2g	15.7"x11.8" / 400x300mm	\$960.00
GBK-Plus 120	260lb / 120kg	0.01lb / 5g	15.7"x11.8" / 400x300mm	\$1,010.00
GFK-Plus 75	165lb / 75kg	0.01lb / 5g	19.7"x15.7" / 500x400mm	\$1,065.00
GFK-Plus 75H	165lb / 75kg	0.002lb / 1g	19.7"x15.7" / 500x400mm	\$1,450.00
GFK-Plus 150	330lb / 150kg	0.02lb / 0.01kg	19.7"x15.7" / 500x400mm	\$1,065.00
GFK-Plus 150H	330lb / 150kg	0.005lb / 2g	19.7"x15.7" / 500x400mm	\$1,460.00
GFK-Plus 300	660lb / 300kg	0.05lb / 0.02kg	19.7"x15.7" / 500x400mm	\$1,150.00
GFK-Plus 600	1320lb / 600kg	0.1lb / 0.05kg	31.5"x23.6" / 800x600mm	\$1,490.00

Trade Approved Models

Model	Capacity	Readability	Pan Size	List Price
GBK 15aM	15lb / 6kg	0.002lb / 1g	15.7" x11.8" / 400x300mm	\$1,065.00
GBK 30aM	30lb / 15kg	0.005lb / 2g	15.7" x11.8" / 400x300mm	\$920.00
GBK 60aM	60lb / 30kg	0.01lb / 5g	15.7" x11.8" / 400x300mm	\$995.00
GBK 150aM	150lb / 60kg	0.02lb / 0.01kg	15.7" x11.8" / 400x300mm	\$995.00
GBK 300aM	300lb / 150kg	0.05lb / 0.02kg	15.7" x11.8" / 400x300mm	\$1,030.00
GFK 150aM	150lb / 60kg	0.02lb / 0.01kg	19.7" x15.7" / 500x400mm	\$995.00
GFK 300aM	300lb / 150kg	0.05lb / 0.02kg	19.7" x15.7" / 500x400mm	\$1,025.00
GFK 600aM	600lb / 300kg	0.1lb / 0.05kg	19.7" x15.7" / 500x400mm	\$1,150.00

Models ending in:
H: High-readability

Easy to operate, AGB and AGF stainless steel scales are well-suited for use in warehouses, shipping and receiving areas, factories and production facilities. The scales offer capacities from 16lb/8kg to 1,320lb/600kg and perform a variety of weighing tasks. Featuring an internal rechargeable battery, the AGB / AGF can be used in locations where power is unavailable.



AGF



AGB



AGB without Pillar



Display backlight changes color during checkweighing



Rugged, IP68-certified waterproof indicator can be washed down




Large, grade 304 stainless steel pan for easy cleaning


Features

- Rugged construction stands up to industrial use
- RS-232 interface provides speedy connection to computers and printers
- Hold function freezes the displayed weight, allowing time to elapse without losing the result
- Checkweighing with audible alarm
- Basic parts counting with preset sample sizes
- Rechargeable battery included for operation almost anywhere
- Tare function speeds the process of repetitive weighing
- Selectable digital filtering for dynamic/animal weighing enables consistent results for moving subjects


General Specifications

- Weighing units: g, kg, lb, lb:oz, oz
- Interface: RS-232
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 120 hours
- Display: Backlit LCD with 1.6" / 40mm-high digits
- Calibration: External
- Housing: Stainless steel indicator with mild steel base
- Operating temperature: -10° to 40°C / 14° to 104°F




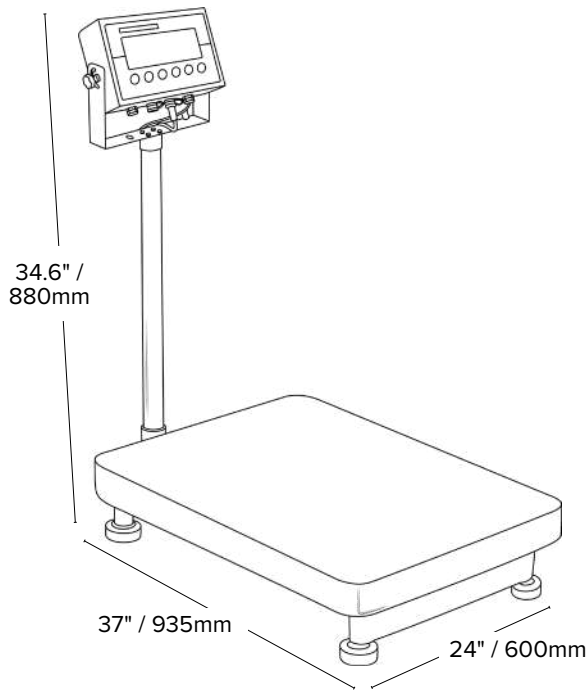

AGF 1320a Floor Scale

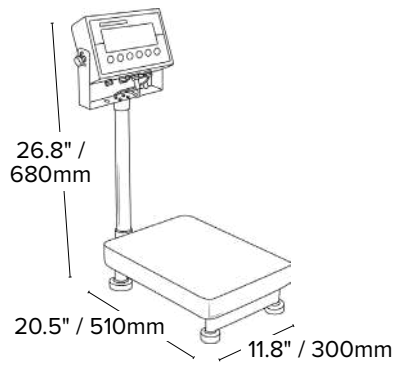

AGB Bench Scale

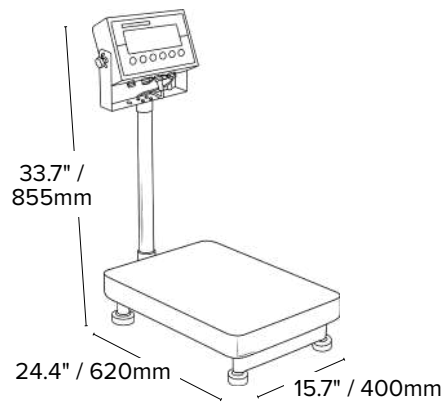


AGF Floor Scale

Model	Capacity	Readability	Pan Size	List Price
AGB 16a	16lb / 8kg	0.0005lb / 0.2g	15.7"x11.8" / 400x300mm	\$1,180.00
AGB 35a	35lb / 16kg	0.001lb / 0.5g	15.7"x11.8" / 400x300mm	\$1,060.00
AGB 65a	65lb / 30kg	0.002lb / 1g	15.7"x11.8" / 400x300mm	\$1,140.00
AGB 175a	175lb / 80kg	0.005lb / 2g	15.7"x11.8" / 400x300mm	\$1,150.00
AGB 260a	260lb / 120kg	0.01lb / 5g	15.7"x11.8" / 400x300mm	\$1,180.00
AGF 175a	175lb / 80kg	0.005lb / 2g	19.7"x15.7" / 500x400mm	\$1,260.00
AGF 350a	350lb / 160kg	0.01lb / 5g	19.7"x15.7" / 500x400mm	\$1,260.00
AGF 660a	660lb / 300kg	0.02lb / 0.01kg	19.7"x15.7" / 500x400mm	\$1,315.00
AGF 1320a	1320lb / 600kg	0.05lb / 0.02kg	31.5"x23.6" / 800x600mm	\$1,550.00



Relay Box
See pg. 95

BKT label printing scales offer the durability needed for manufacturing, packing, distribution, shipping and receiving tasks. The scale features a built-in printer for creating labels with weight, QR codes, barcodes and more in numerous languages.

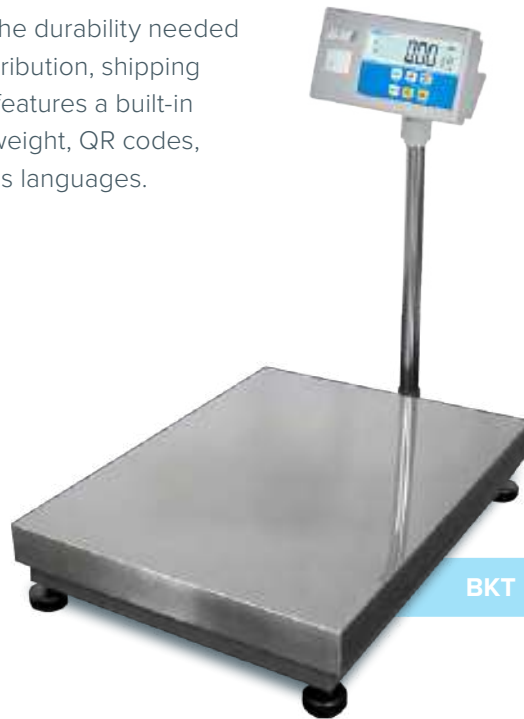

BKT Floor Scale



BKT Bench Scale



BKT without Pillar



Large, 1.3" / 34mm-high digits on vivid, backlit display



Grade 304 stainless steel pan stands up to industrial use




Built-in printer — get weight data, QR codes, barcodes and more


Features

- RS-232 interface provides speedy connection to computers and printers
- Checkweighing function with audible alarm
- Sealed keypad protects against dirt and spills
- Overload protection helps prevent damage to internal components
- Memory accumulation totals results
- Rechargeable battery included for operation almost anywhere
- Selectable digital filtering helps minimize effects of vibration and disturbances


General Specifications

- Weighing units: g, kg, lb, lb:oz, oz
- Interface: RS-232
- Power supply: 12VDC 3A adapter, 10Ah Internal rechargeable battery
- Battery life (up to): 110 hours
- Display: Backlit LCD with 1.3" / 34mm-high digits
- Calibration: External
- Housing: ABS Plastic indicator with mild steel base
- Standard label size (WxH): 2"x1.2" / 50x30mm (labels up to 2.4" / 60mm height can be used)
- Operating temperature: -10° to 40°C / 14° to 104°F




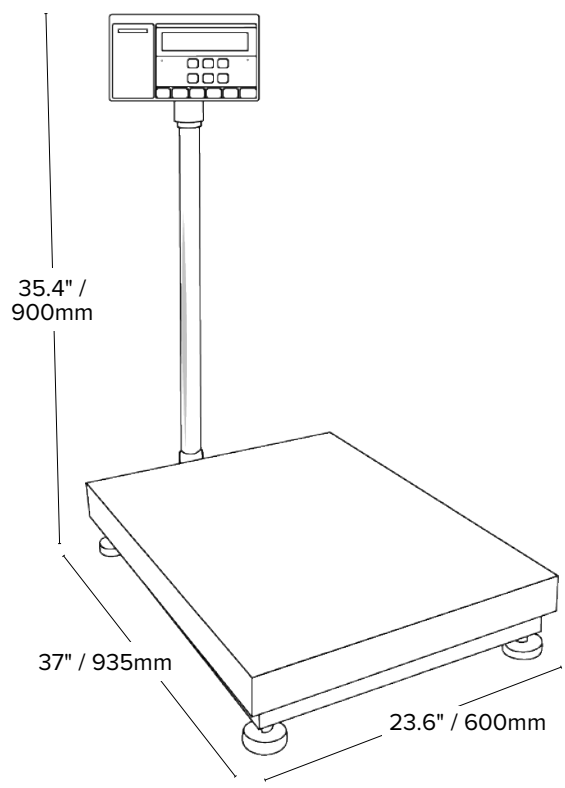

BKT 1320a Floor Scale

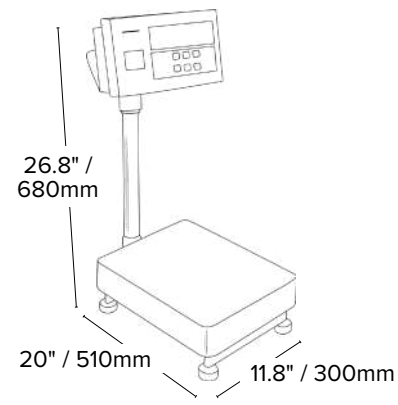

BKT Bench Scale
BKT 16a, 35a, 65a, 130a, 260a

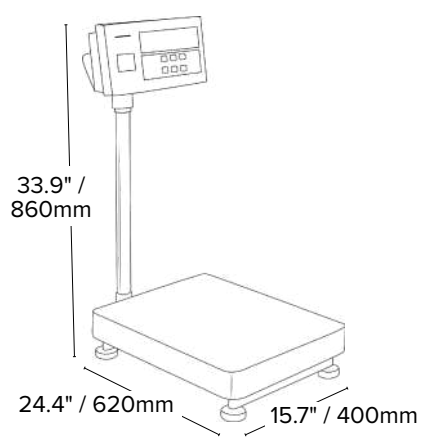

BKT Bench Scale
BKT 165a, BKT 165aH, BKT 330a, 330aH, 660a


Model	Capacity	Readability	Pan Size	List Price
BKT 16a	16lb / 8kg	0.0005lb / 0.2g	15.7"x11.8" / 400x300mm	\$1,270.00
BKT 35a	35lb / 16kg	0.001lb / 0.5g	15.7"x11.8" / 400x300mm	\$1,145.00
BKT 65a	65lb / 30kg	0.002lb / 1g	15.7"x11.8" / 400x300mm	\$1,210.00
BKT 130a	130lb / 60kg	0.005lb / 2g	15.7"x11.8" / 400x300mm	\$1,210.00
BKT 260a	260lb / 120kg	0.01lb / 5g	15.7"x11.8" / 400x300mm	\$1,250.00
BKT 165a	165lb / 75kg	0.01lb / 5g	19.7"x15.7" / 500x400mm	\$1,290.00
BKT 165aH	165lb / 75kg	0.005lb / 2g	19.7"x15.7" / 500x400mm	\$1,675.00
BKT 330a	330lb / 150kg	0.02lb / 0.01kg	19.7"x15.7" / 500x400mm	\$1,290.00
BKT 330aH	330lb / 150kg	0.01lb / 5g	19.7"x15.7" / 500x400mm	\$1,675.00
BKT 660a	660lb / 300kg	0.05lb / 0.02kg	19.7"x15.7" / 500x400mm	\$1,395.00
BKT 1320a	1320lb / 600kg	0.1lb / 0.05kg	31.5"x23.6" / 800x600mm	\$1,720.00

DID YOU KNOW?



Free software is provided for the BKT, allowing users to create their own fully customized label designs on a PC. It's easy to use and within minutes you can have labels ready to go featuring a company logo, weight, date and more.

With an 8" / 200mm touch-screen display, BTT offers an intuitive, user-friendly interface, the convenience of a built-in printer and easy connectivity via RS-232, USB and optional ethernet, Wi-Fi and Bluetooth. Labels can be fully customized (including weighing data, QR codes, bar codes and logos) in varying lengths. BTT can store up to 10 label designs for fast recall. Includes a port to connect a bar code scanner.

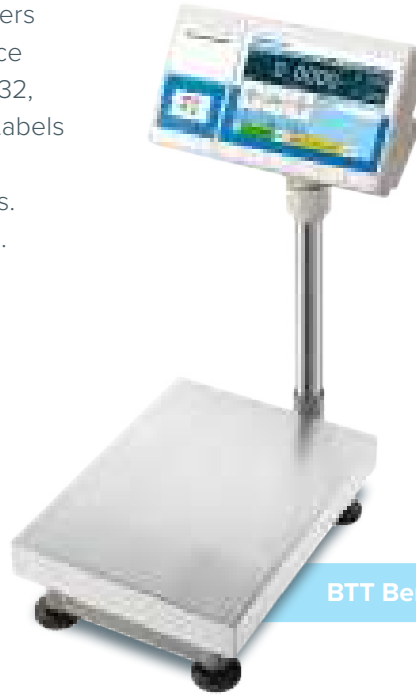

BTT Bench Scale



BTT Floor Scale



Large, 8-inch touch-screen display allows easy, intuitive operation



Retains up to 10 customized label designs in its memory for fast recall



RS-232, USB or optional ethernet, Wi-Fi or Bluetooth connectivity


Features

- Quick and intuitive touch-screen operation
- Easy connectivity through USB, RS-232 or optional RJ45 ethernet, Wi-Fi or Bluetooth
- Create customized labels with options such as date, time, weight, logo, barcode and QR code
- Large, grade 304 stainless steel pan allows for easy cleaning
- Rechargeable battery included for operation almost anywhere
- Memory accumulation totals results
- Parts counting with freely selectable sample sizes
- Can be used with a barcode scanner

General Specifications

- Weighing units: g, kg, lb, lb:oz, oz, ct, dr, mm, TI T, T
- Interface: RS-232, USB, RJ45 (optional), Bluetooth (optional), WiFi (optional)
- Power supply: 12VDC 3A adapter, Internal rechargeable battery
- Display: 8" / 200mm touch-screen
- Calibration: External
- Housing: ABS Plastic indicator with mild steel base
- Standard label size (WxH): 2"x1.2" / 50x30mm (labels up to 2.4" / 60mm height can be used)
- Operating temperature: 0° to 40°C / 32° to 104°F



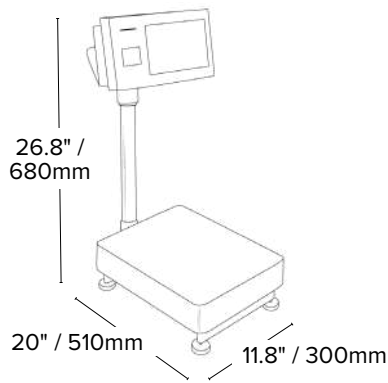

BTT Bench Scale
BTT 8, BTT 16, BTT 32, BTT 60



BTT Floor Scale
BTT 75, BTT 150, BTT 300

Model	Capacity	Readability	Pan Size	List Price
BTT 8	16lb / 8kg	0.0002lb / 0.1g	15.7"x11.8" / 400x300mm	\$1,525.00
BTT 16	35lb / 16kg	0.001lb / 0.5g	15.7"x11.8" / 400x300mm	\$1,525.00
BTT 32	70lb / 32kg	0.002lb / 1g	15.7"x11.8" / 400x300mm	\$1,525.00
BTT 60	130lb / 60kg	0.005lb / 2g	15.7"x11.8" / 400x300mm	\$1,525.00
BTT 75	165lb / 75kg	0.01lb / 5g	19.7"x15.7" / 500x400mm	\$1,675.00
BTT 150	330lb / 150kg	0.02lb / 10g	19.7"x15.7" / 500x400mm	\$1,675.00
BTT 300	660lb / 300kg	0.05lb / 20g	19.7"x15.7" / 500x400mm	\$1,825.00

44 COUNTING SCALES

With a choice of sizes, capacities, readabilities and options, Adam Equipment counting scales can easily accommodate counting, check counting, filling, checkweighing and accumulation needs. They are able to quickly and accurately count parts, saving time in manufacturing applications and reducing waste when filling packs.


Simple to use, Adam's counting scales are available with a single display, or with three displays to simultaneously show unit weight, count and total weight. Adam offers dual counting scales, which maximize efficiency by allowing the use of a second auxiliary platform when counting large quantities.

Rechargeable Battery
Rechargeable battery included for operation almost anywhere

Preset Tare
Preset tare function speeds up the process of repetitive counting


Stainless Steel Pan
Large, grade 304 stainless steel pan allows for quick cleaning

GFC **pg.48**

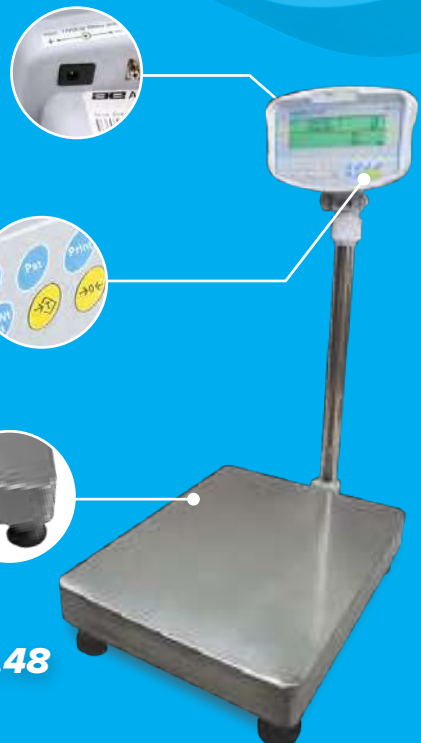



KEY ACCESSORIES



Remote Bases
See pg. 67-71



In-Use Cover
See pg. 89

CDT has the ability to connect to a larger, optional remote base to count large numbers of items in oversized containers. Users can switch between weighing on the built-in pan or auxiliary platform.



Backlit LCD displays show weight, unit weight and total count clearly



Internal counting resolution of 1:600,000 for precise results



Count greater quantities accurately by connecting to a second base



Features

- Freely selectable sample sizes
- Solid ABS housing provides durability for industrial use
- Rechargeable battery for operation almost anywhere
- Built-in memory for storing up to 99 product PLUs and descriptions
- Parts counting optimization automatically refines piece weight as parts are added
- Preset tare function speeds the process of repetitive weighing
- Programmable for counting to a preset number of parts
- RS-232 interface provides speedy connection to computers and printers

General Specifications

- Weighing units: kg, lb
- Interface: RS-232
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 100 hours
- Display: Backlit LCD with 0.6" / 15mm-high digits
- Calibration: External
- Housing: ABS Plastic
- Operating temperature: -10° to 40°C / 14° to 104°F
- PLUs: 99

Model	Capacity	Readability	Pan Size	List Price
CDT 4	8lb / 4kg	0.0002lb / 0.1g	11.8"x8.3" / 300x210mm	\$810.00
CDT 8	16lb / 8kg	0.0005lb / 0.2g	11.8"x8.3" / 300x210mm	\$810.00
CDT 16	35lb / 16kg	0.001lb / 0.5g	11.8"x8.3" / 300x210mm	\$810.00
CDT 32	70lb / 32kg	0.002lb / 1g	11.8"x8.3" / 300x210mm	\$810.00
CDT 48	100lb / 48kg	0.005lb / 2g	11.8"x8.3" / 300x210mm	\$810.00

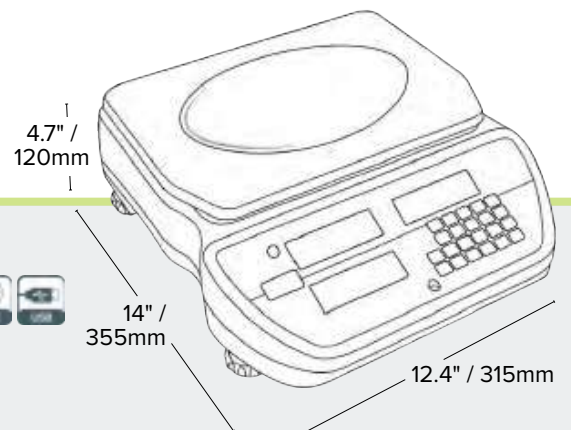



KEY ACCESSORIES



ATP2 Thermal Printer
See pg. 93



Large & Small Scoops
See pg. 94

Cruiser CCT offers intelligent functions that are practical for shipping and receiving, warehouse use, and production facilities. Help reduce waste by using the CCT to quickly check the number of pieces in a container.



Backlit LCD displays show weight, unit weight and total count clearly



Internal counting resolution of 1:1,600,000 for precise results




RS-232 / optional USB interface provides connection to printers and computers


Features

- Freely selectable sample sizes
- Solid ABS housing provides durability for industrial use
- Rechargeable battery for operation almost anywhere
- Built-in memory stores up to 140 product PLUs for fast recall
- Preset tare function speeds the process of repetitive weighing
- Programmable for counting to a preset number of parts
- Parts counting optimization automatically refines piece weight as parts are added

General Specifications

- Weighing units: g, kg, lb
- Interface: RS-232, Optional USB
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 100 hours
- Display: Backlit LCD with 0.6" / 15mm-high digits
- Calibration: External
- Housing: ABS Plastic
- Operating temperature: -10° to 40°C / 14° to 104°F
- PLUs: 140



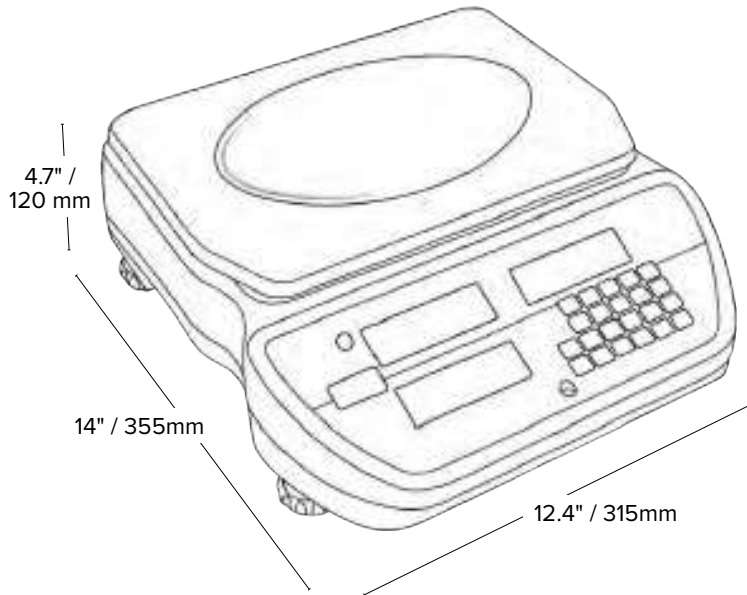

Model	Capacity	Readability	Pan Size	List Price
CCT 4	8lb / 4kg	0.0002lb / 0.1g	11.8"x8.3" / 300x210mm	\$630.00
CCT 8	16lb / 8kg	0.0005lb / 0.2g	11.8"x8.3" / 300x210mm	\$630.00
CCT 16	35lb / 16kg	0.001lb / 0.5g	11.8"x8.3" / 300x210mm	\$630.00
CCT 32	70lb / 32kg	0.002lb / 1g	11.8"x8.3" / 300x210mm	\$630.00
CCT 48	100lb / 48kg	0.005lb / 2g	11.8"x8.3" / 300x210mm	\$630.00
CCT 8UH	16lb / 8kg	0.0001lb / 0.05g	11.8"x8.3" / 300x210mm	\$760.00
CCT 16UH	35lb / 16kg	0.0002lb / 0.1g	11.8"x8.3" / 300x210mm	\$760.00
CCT 32UH	70lb / 32kg	0.0005lb / 0.2g	11.8"x8.3" / 300x210mm	\$760.00
CCT 48UH	100lb / 48kg	0.001lb / 0.5g	11.8"x8.3" / 300x210mm	\$760.00

DID YOU KNOW?



You can store up to 140 PLUs in the Cruiser CCT's memory! This makes regular counting tasks even quicker, allowing you to quickly recall the piece weight of a given item – without needing to get a sample weight/count first.

Models ending in:
UH: Ultra-high readability model

GBC and GFC parts-counting bench and floor scales offer a combination of features and durability, making them well-suited for demanding industrial counting tasks. A numeric keypad simplifies unit weight and sample entry, while the display shows total weight, unit weight and number of pieces. With its larger capacities and base size, the GFC can be used for counting and weighing large items or greater quantities of small items.



Backlit LCD shows weight, unit weight and count in one convenient location



Internal counting resolution of 1:600,000 for precise results



RS-232 interface provides speedy connection to computers and printers

Features

- Large, grade 304 stainless steel pan allows for easy cleaning
- Splash-proof housing, keypad and display are easy to clean
- Rechargeable battery included for operation almost anywhere
- Audible overload alarm warns when capacity is exceeded
- User can program alarm to sound when preset total is reached
- Auto-zeroing ensures the screen returns to zero
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Parts counting optimization automatically refines piece weight as parts are added
- Built-in memory for storing settings, as well as up to 99 piece weights
- Selectable digital filtering helps minimize effects of vibration and disturbances
- Freely selectable sample sizes

General Specifications


- Weighing units: kg, lb
- Interface: RS-232, Optional USB
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 120 hours
- Display: Backlit LCD with 0.8" / 20mm-high digits
- Calibration: External
- Housing: ABS Plastic indicator with die-cast aluminum base
- Operating temperature: -10° to 40°C / 14° to 104°F




*USB optional



ATP2 Thermal Printer
See pg. 93

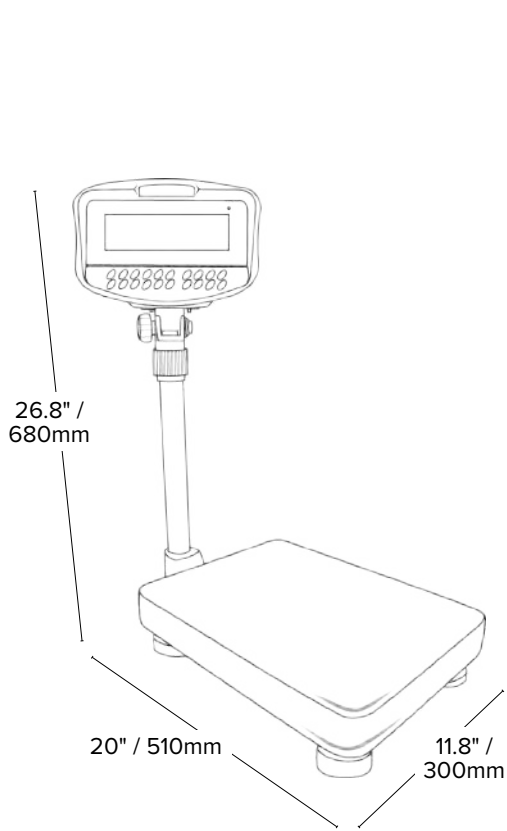

GBC Bench Scale

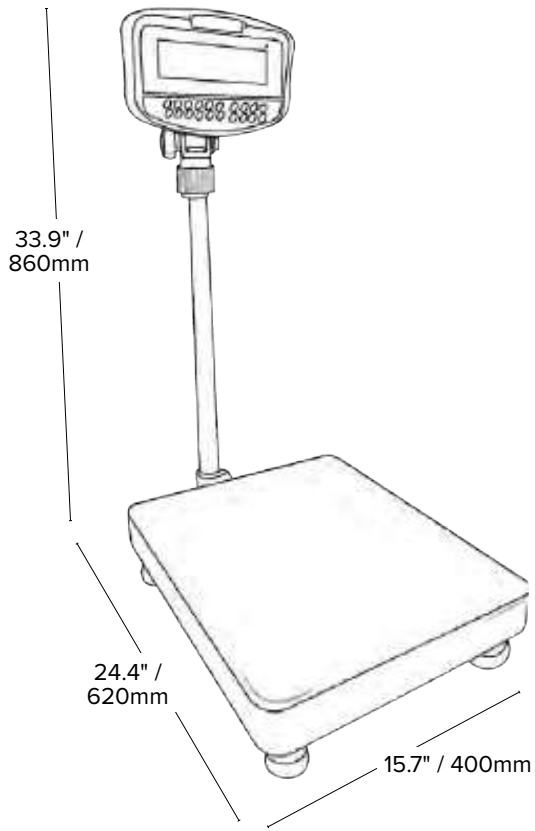

GFC Floor Scale


Model	Capacity	Readability	Pan Size	List Price
GBC 35a	35lb / 16kg	0.001lb / 0.0005kg	15.7"x11.8" / 400x300mm	\$965.00
GBC 70a	70lb / 32kg	0.002lb / 0.001kg	15.7"x11.8" / 400x300mm	\$965.00
GBC 130a	130lb / 60kg	0.005lb / 0.002kg	15.7"x11.8" / 400x300mm	\$965.00
GFC 165a	165lb / 75kg	0.01lb / 0.005kg	19.7"x15.7" / 500x400mm	\$1,120.00
GFC 330a	330lb / 150kg	0.02lb / 0.01kg	19.7"x15.7" / 500x400mm	\$1,120.00
GFC 660a	660lb / 300kg	0.05lb / 0.02kg	19.7"x15.7" / 500x400mm	\$1,260.00

DID YOU KNOW?



The full numeric keypad on the GBC/GFC indicators allows sample weights, if already known, to be entered by hand. It also allows counting limits to be entered, if using the check counting function.

BCT scales offer excellent value for bulk industrial counting tasks. A built-in printer outputs labels that feature weight, parts counts, QR codes, barcodes and more. Store up to 1006 PLUs or piece weights to expedite inventory and batching jobs.

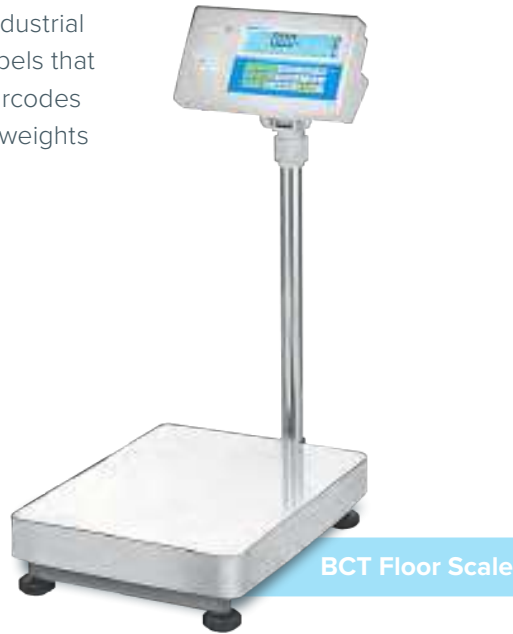

BCT Floor Scale



BCT Bench Scale



BCT without Pillar



Built-in printer – print count data, QR codes, barcodes and more



Grade 304 stainless steel pan stands up to industrial use




Internal counting resolution of 1:600,000 for precise results


Features

- Backlit LCD shows weight, unit weight and count in one location
- RS-232 interface provides speedy connection to devices
- Splash-proof housing, keypad and display are easy to clean
- Rechargeable battery included for operation almost anywhere
- Audible overload alarm warns when capacity is exceeded
- User can program alarm to sound when preset total is reached
- Parts counting with freely selectable sample sizes
- Parts counting optimization automatically refines piece weight as parts are added
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Selectable digital filtering helps minimize effects of vibration and disturbances


General Specifications

- Weighing units: g, kg, lb, oz
- Interface: RS-232
- Power supply: 12VDC 3A adapter, 10Ah Internal rechargeable battery
- Battery life (up to): 110 hours
- Display: Backlit LCD with 22mm-high digits (0.6" / 15mm Unit weight and Count)
- Calibration: External
- Housing: ABS Plastic indicator with mild steel base
- Standard label size (WxH): 2"x1.2" / 50x30mm (labels up to 2.4" / 60mm height can be used)
- Operating temperature: -10° to 40°C / 14° to 104°F
- PLUs: 1,006



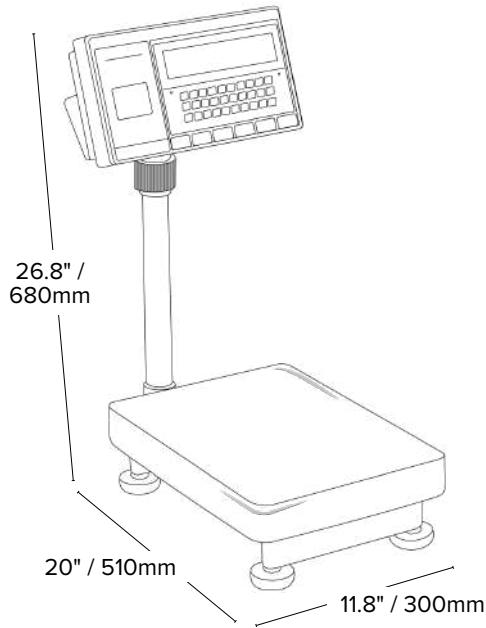

BCT Bench Scale

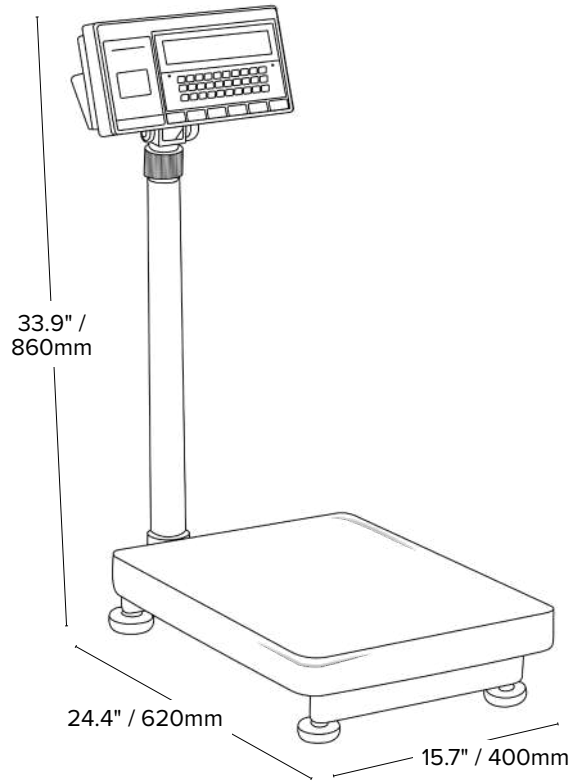

BCT Floor Scale

Model	Capacity	Readability	Pan Size	List Price
BCT 35a	35lb / 16kg	0.001lb / 0.5g	15.7"x11.8" / 400x300mm	\$1,210.00
BCT 65a	65lb / 30kg	0.002lb / 1g	15.7"x11.8" / 400x300mm	\$1,260.00
BCT 130a	130lb / 60kg	0.005lb / 2g	15.7"x11.8" / 400x300mm	\$1,260.00
BCT 165a	165lb / 75kg	0.01lb / 5g	19.7"x15.7" / 500x400mm	\$1,405.00
BCT 330a	330lb / 150kg	0.02lb / 0.01kg	19.7"x15.7" / 500x400mm	\$1,405.00
BCT 660a	660lb / 300kg	0.05lb / 0.02kg	19.7"x15.7" / 500x400mm	\$1,545.00



Labels
See pg. 89

52

WASHDOWN & WATERPROOF SCALES

Adam Equipment offers a broad selection of durable, IP-rated washdown scales for all types of weighing tasks. All washdown scales can be thoroughly hosed down or washed with a pressure washer, as they incorporate stainless steel parts and watertight seals.

Ideal for use in many industries, Adam washdown scales are well-suited for weighing food and beverages, powders, chemicals, pharmaceuticals, or for any application needing a sealed scale for wet or dusty environments. This allows for removal of any residual particles after weighing, which minimizes the possibility of cross-contamination, removes dirt build-up and helps eliminate the growth of bacteria, mold or other toxins.

AQUA
ABW-S



pg.54

MODEL QUICK FINDER

	ABW	ABW-S	Gladiator
IP67 rated	•		
IP68 rated		•	•
Sealed keypad	•	•	•
Stainless steel weighing pan	•	•	•
Checkweighing function	•	•	•
RS-232 interface			•
Front and rear displays	•	•	
Trade approved models available			•



ABW 32 with Large Pan

Designed for applications needing frequent washdown, Aqua ABW scales come in a selection of capacities and readabilities. ABW offers an IP67 rating and features a stainless steel pan to withstand demanding industrial and food processing environments.



Checkweighing function indicator appears in three bright LED colors



Solid IP67-rated ABS housing is durable enough for industrial use



Front and rear LED displays allow for shared use


Features

- IP67-rated housing with sealed keypad protects against water and dust
- Stabilization time of under one second
- Overload protection helps prevent damage to internal components
- Bright LED display for easy viewing in most environments
- Rechargeable battery included for operation almost anywhere
- Clear, hidden-until-needed function indicators keep focus where it's needed

General Specifications

- Weighing units: kg, g, lb, oz, lb:oz
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 80 hours
- Display: 2x LED displays with 0.8" / 20mm front and 0.6" / 15mm rear digits
- Calibration: External
- Housing: ABS Plastic
- Operating temperature: 0° to 40°C / 32° to 104°F

Model	Capacity	Readability	Pan Size	List Price
ABW 4	9lb / 4kg	0.001lb / 0.5g	9.6"x7.1" / 245x180mm	\$445.00
ABW 8	18lb / 8kg	0.002lb / 1g	9.6"x7.1" / 245x180mm	\$445.00
ABW 16	35lb / 16kg	0.005lb / 2g	9.6"x7.1" / 245x180mm	\$445.00
ABW 32	70lb / 32kg	0.01lb / 5g	11.8"x8.3" / 300x210mm	\$445.00

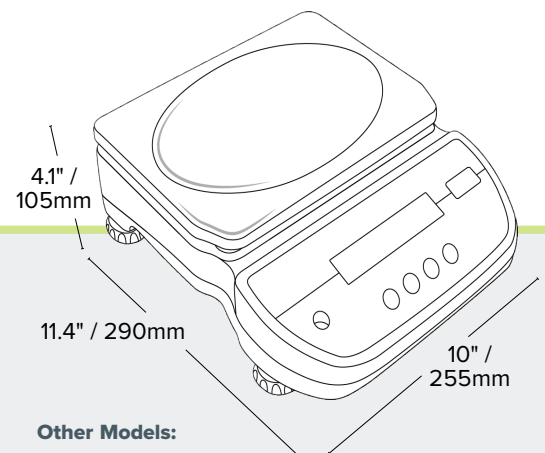

Other Models:



ABW32: 11.8"x12.2"x4.1" / 300x310x105mm (WxDxH with feet wound up)



ABW 32S with Large Pan

IP68-certified waterproof protection and tough, grade 304 stainless steel housing make the Aqua ABW-S an essential tool for weighing in washdown environments. Weighing as precise as to 0.1g means dependable results for many applications.



"Hidden until needed" checkweighing lights show if weight is above, below or within limits



IP68, grade 304 stainless steel housing protects scale in washdown areas



Bright LED display for easy viewing in most environments

Features



- IP68-rated waterproof housing with sealed keypad protects against water and dust
- Rechargeable battery included for operation almost anywhere
- Internal counting resolution 1:600,000 for precise results
- Parts counting optimization automatically refines piece weight as parts are added
- Overload protection helps prevent damage to internal components
- Front and rear LED displays allow for dual use
- Clear, hidden-until-needed function indicators keep focus where it's needed

General Specifications

- Weighing units: kg, g, lb, oz, lb:oz
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 80 hours
- Display: 2x LED displays with 0.8" / 20mm front and 0.6" / 15mm rear digits
- Calibration: External
- Housing: Stainless Steel (upper); ABS plastic (lower)
- Operating temperature: 0° to 40°C / 32° to 104°F



Large & Small Scoops
See pg. 94

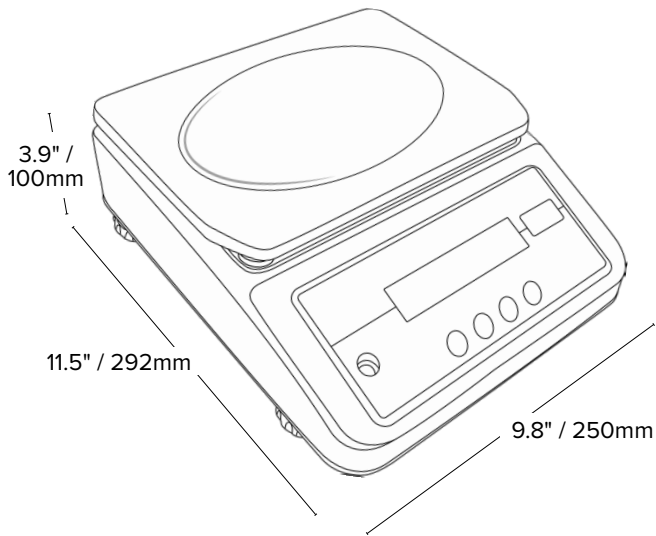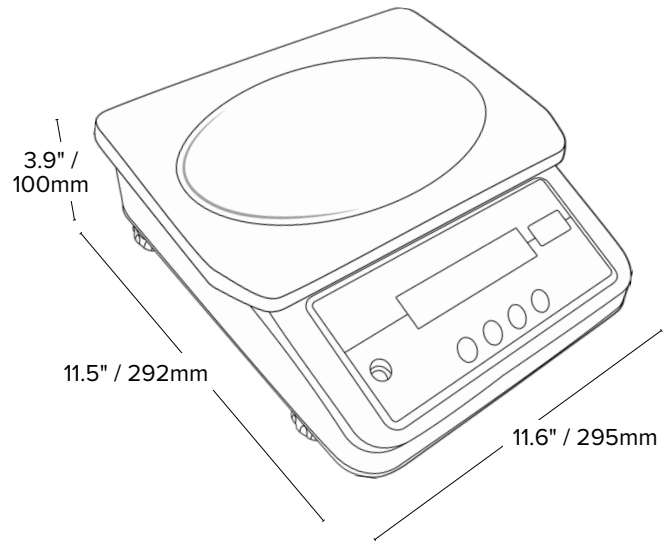

ABW-S Standard Pan

ABW 32S with Large Pan

Model	Capacity	Readability	Pan Size	List Price
ABW 4S	9lb / 4kg	0.0002lb / 0.1g	9.6"x7.1" / 245x180mm	\$550.00
ABW 8S	18lb / 8kg	0.001lb / 0.5g	9.6"x7.1" / 245x180mm	\$550.00
ABW 16S	35lb / 16kg	0.002lb / 1g	9.6"x7.1" / 245x180mm	\$550.00
ABW 32S	70lb / 32kg	0.005lb / 2g	11.8"x8.3" / 300x210mm	\$550.00


DID YOU KNOW?

IP ratings are a grading system used to determine the level of protection from water, dust or dirt. IP ratings are assigned in accordance with British standard BS EN 60529:1992. IP68-certified scales, such as the ABW-S, are considered waterproof.

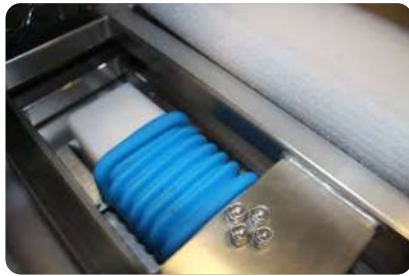Gladiator scales achieve washdown weighing tasks in demanding food, pharmaceutical and industrial settings. Boasting an IP68 waterproof rating, the Gladiator features easy-to-clean stainless steel construction and a sealed indicator that is protected in dusty or wet environments.



Water-resistant, encapsulated silicone-coated loadcell



Backlit display changes color for quick notification of checkweighing limits



IP68-rated for protection against water and dust

Features


- Large, grade 304 stainless steel pan allows for easy cleaning
- Rugged stainless steel construction for ultimate durability
- Sealed keypad protects against dirt and spills
- RS-232 interface provides speedy connection to computers and printers
- Rechargeable battery included for operation almost anywhere
- Hold function freezes the displayed weight
- Parts counting with preset sample sizes
- Tare function speeds the process of repetitive weighing
- Selectable digital filtering for dynamic / animal weighing enables consistent results for moving subjects

General Specifications


- Weighing units*: g, kg, lb, lb:oz, oz, N
 - Interface: RS-232
 - Power supply: 12VDC 800mA adapter, Internal rechargeable battery
 - Battery life (up to): 120 hours
 - Display: Backlit LCD with 1.6" / 40mm-high digits
 - Calibration: External
 - Housing: Stainless steel
 - Operating temperature: -10° to 40°C / 14° to 104°F
- *lb:oz and N are not legal-for-trade weighing units*




Relay Box
See pg. 95

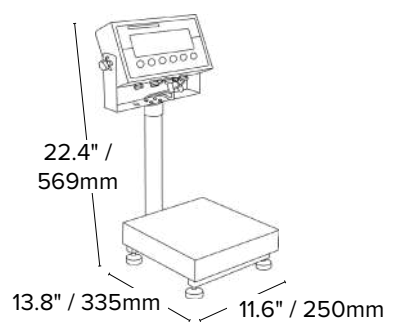


GGG Small Platform

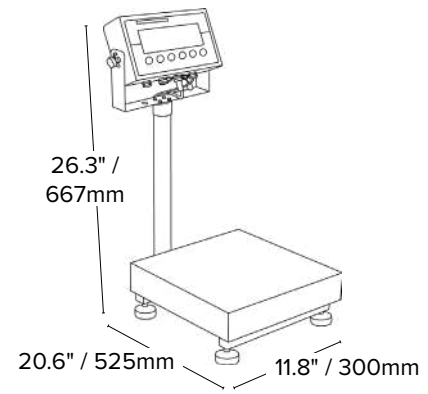

GGB Bench Scale

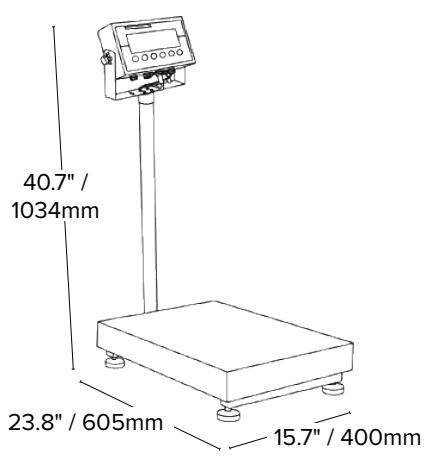

GGF Floor Scale

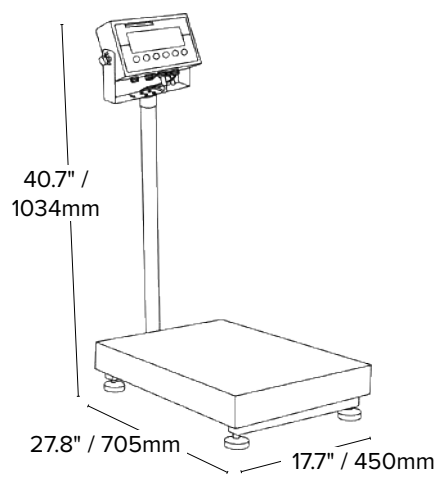

GGL Large Platform

Model	Capacity	Readability	Pan Size	List Price
GGG 16a	16lb / 8kg	0.001lb / 0.5g	9.8"x9.8" / 250x250mm	\$1,320.00
GGG 35a	35lb / 16kg	0.002lb / 1g	9.8"x9.8" / 250x250mm	\$1,320.00
GGG 65a	65lb / 30kg	0.005lb / 2g	9.8"x9.8" / 250x250mm	\$1,320.00
GGB 65a	65lb / 30kg	0.005lb / 2g	15.7"x11.8" / 400x300mm	\$1,440.00
GGB 65aH	65lb / 30kg	0.002lb / 1g	15.7"x11.8" / 400x300mm	\$1,600.00
GGB 165a	165lb / 75kg	0.01lb / 5g	15.7"x11.8" / 400x300mm	\$1,440.00
GGF 165a	165lb / 75kg	0.01lb / 5g	19.7"x15.7" / 500x400mm	\$1,600.00
GGF 165aH	165lb / 75kg	0.005lb / 2g	19.7"x15.7" / 500x400mm	\$2,000.00
GGF 330a	330lb / 150kg	0.02lb / 0.01kg	19.7"x15.7" / 500x400mm	\$1,825.00
GGL 330a	330lb / 150kg	0.02lb / 0.01kg	23.6"x17.7" / 600x450mm	\$2,050.00

Trade Approved Models

Model	Capacity	Readability	Pan Size	List Price
GGG 15aM	15lb / 6kg	0.002lb / 1g	9.8"x9.8" / 250x250mm	\$1,390.00
GGG 30aM	30lb / 15kg	0.005lb / 2g	9.8"x9.8" / 250x250mm	\$1,390.00
GGG 60aM	60lb / 30kg	0.01lb / 5g	9.8"x9.8" / 250x250mm	\$1,390.00
GGB 60aM	60lb / 30kg	0.01lb / 5g	15.7"x11.8" / 400x300mm	\$1,505.00
GGB 150aM	150lb / 60kg	0.02lb / 0.01kg	15.7"x11.8" / 400x300mm	\$1,505.00
GGF 150aM	150lb / 60kg	0.02lb / 0.01kg	19.7"x15.7" / 500x400mm	\$1,875.00
GGF 300aM	300lb / 150kg	0.05lb / 0.02kg	19.7"x15.7" / 500x400mm	\$1,875.00
GGL 300aM	300lb / 150kg	0.05lb / 0.02kg	23.6"x17.7" / 600x450mm	\$2,095.00
GGL 600aM	600lb / 300kg	0.1lb / 0.05kg	23.6"x17.7" / 600x450mm	\$2,200.00



KEY ACCESSORIES



Calibration Certificate
See pg. 95



Large & Small Scoops
See pg. 94

IP66-rated WBW trade approved washdown scales with a durable stainless steel weighing pan and ABS plastic housing offer easy operation in wet environments. Ideal for agriculture, food service, cosmetics and retail.



IP66-rated for protection against water and dust



Checkweighing LEDs clearly show under, over and within acceptable limits



Dependable, trade-approved weighing results


Features

- Capacity tracker built into display for easily monitoring overloads
- Large, grade 304 stainless steel pan allows swift cleaning
- Overload protection helps prevent damage to internal components
- Rechargeable battery included for operation almost anywhere
- Audible overload alarm warns when capacity is exceeded
- Simple operation allows quick startup and use with little or no training

General Specifications

- Weighing units: g, kg, lb, oz
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 160 hours
- Display: Backlit LCD with 0.8" / 20mm-high digits
- Housing: ABS plastic
- Operating temperature: -10° to 40°C / 14° to 104°F

Model	Capacity	Readability	Pan Size	List Price
WBW 6aM	6lb / 3kg	0.002lb / 1g	8.3"x6.8" / 210x173mm	\$440.00
WBW 15aM	15lb / 6kg	0.005lb / 2g	8.3"x6.8" / 210x173mm	\$440.00
WBW 30aM	30lb / 15kg	0.01lb / 5g	8.3"x6.8" / 210x173mm	\$440.00

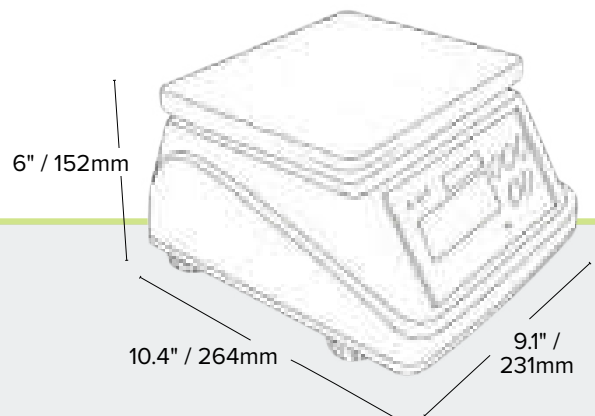



KEY ACCESSORIES



Calibration Certificate
See pg. 95



Large & Small Scoops
See pg. 94

The WBZ trade approved washdown retail scale features a durable stainless steel pan and IP66-rated waterproof housing, making it ideal for processing, preparing and packaging food. The backlit display provides weight, price per unit and total cost.



IP66-rated for protection against water and dust



Rear display lets customers see the weight, price per unit and total cost



Dependable, trade-approved weighing results

Features

- Backlit LCD shows weight, unit list price and total list price to provide all key information simultaneously
- Large, grade 304 stainless steel pan allows swift cleaning
- Overload protection helps prevent damage to internal components
- Sealed keypad protects against dirt and spills
- Rechargeable battery included for operation almost anywhere
- Security password control prevents unauthorized access
- Selectable auto-clear function enables the last item to be reset each time the scale returns to zero


General Specifications

- Weighing units*: kg, lb
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 160 hours
- Display: Backlit LCD with 0.6" / 16mm-high digits
- Housing: ABS plastic
- Operating temperature: -10° to 40°C / 14° to 104°F

*One weighing unit (either lb or kg) is Programd on the scale prior to purchase. If it needs to be switched later, the conversion must be performed by technicians in an Adam Equipment facility.

Model	Capacity	Readability	Pan Size	List Price
WBZ 15aM	15lb / 6kg	0.005lb / 0.002kg	8.3"x6.8" / 210x173mm	\$285.00

6" / 152mm

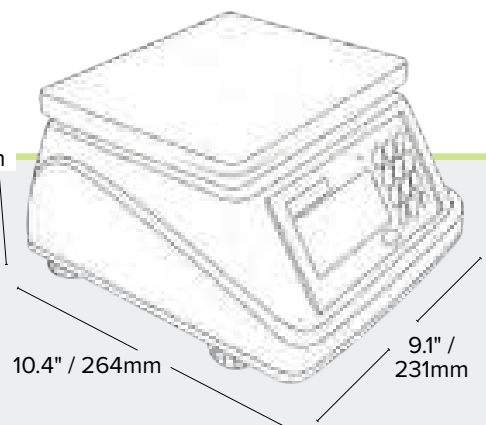

10.4" / 264mm


9.1" / 231mm



60 RETAIL SCALES

Adam Equipment's retail scales are easy to operate, facilitating smooth and efficient transactions for users and customers. With large backlit displays that show weight, price per unit, and total cost, the scales speed the entire process by simultaneously showing information to customer and operator. Easy to maintain, our retail scales offer stainless steel pans that withstand frequent cleaning required in tasks such as weighing meat and cheese at a deli or measuring frozen yogurt at a shop.

Ideal for farmers' markets or roadside produce stands, they're powered by AC adapters or batteries, so they can operate where electricity isn't available. Rubber feet offer stability on desks, tables, counter-tops or unsteady surfaces, resulting in consistent, accurate readings. RS-232 interface is available on the scales, allowing information to be transmitted to a printer or computer.

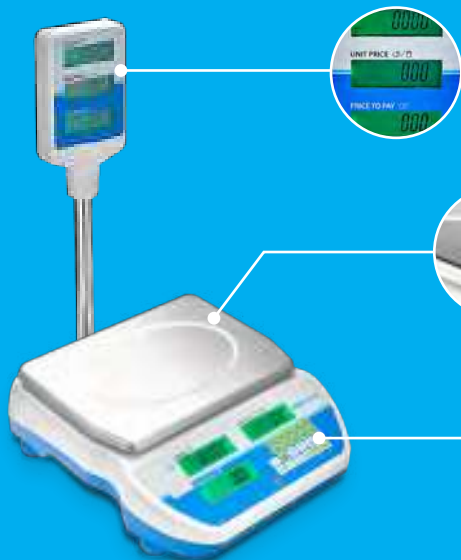

Pillar Display

Rear display mounted on a pillar or back of scale lets customers see key data

Sturdy Construction

Robust ABS plastic body with stainless steel top pan

Product Look up

Product look up (PLU) memory locations store a range of items for recall

Swift offers a straightforward weighing and price-computing solution for retail operations selling products by weight. Robust ABS plastic construction and stainless steel top pan make this a retail scale well-suited to smaller businesses including farm shops, market stalls and pop-up shops.



SWZ with Pillar



Product look up (PLU) memory stores 161 item prices for recall



Rear display mounted on a pillar or back of the scale



Rechargeable battery-powered for operation almost anywhere


Features

- Backlit LCD shows weight, unit price and total price
- RS-232 interface provides speedy connection to computers and printers
- Optional USB interface simplifies data communication
- Overload protection helps prevent damage to internal components
- Drip channels help divert spills away from internal components
- Adjustable filtering for a stable weight reading in all conditions
- Available in multiple currencies

General Specifications

- Weighing units: kg, lb
- Interface: RS-232, Optional USB
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 90 hours
- Display: Backlit LCD with 0.6" / 15mm high digits
- Calibration: External
- Housing: ABS plastic
- Operating Temperature: -10° to 40°C / 14° to 104°F
- PLUs: 161

Model	Capacity	Readability	Pan Size	List Price
SWZ 6Da	3lb / 6lb	0.001lb / 0.002lb	300x210mm	\$440.00
SWZ 15Da	6lb / 15lb	0.002lb / 0.005lb	300x210mm	\$440.00
SWZ 30Da	15lb / 30lb	0.005lb / 0.010lb	300x210mm	\$440.00
SWZ 60Da	30lb / 60lb	0.01lb / 0.02lb	300x210mm	\$440.00
SWZ 6DPa	3lb / 6lb	0.001lb / 0.002lb	300x210mm	\$545.00
SWZ 15DPa	6lb / 15lb	0.002lb / 0.005lb	300x210mm	\$545.00
SWZ 30DPa	15lb / 30lb	0.005lb / 0.010lb	300x210mm	\$545.00
SWZ 60DPa	30lb / 60lb	0.01lb / 0.02lb	300x210mm	\$545.00

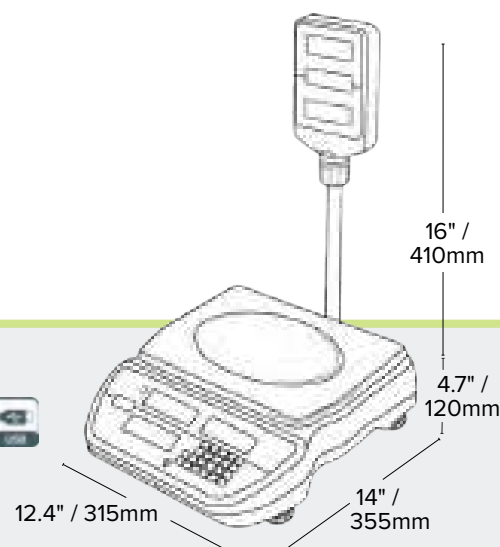

62

HEAVY DUTY & PLATFORM SCALES

Adam Equipment offers a range of heavy duty and robust platform scales designed with features suited to demanding weighing environments such as factories, shipping and receiving departments, warehouses and loading docks. These industrial platform scales are ideal for weighing bulky and large items such as boxes, shipping crates, pallets, heavy luggage and other oversized items.

Adam's industrial platform scales are simple and easy to use yet versatile in application. While they are often used to weigh heavy items because of their high capacities, they can also be connected to weighing indicators for additional performance capabilities such as checkweighing, percentage weighing and counting.

A platform weighing scale can also be connected to Adam's label printers, which are ideal for helping keep track of stock and for business inventory management purposes. Some heavy-duty platform scales can also be connected to ramps and rollerdecks to make loading and unloading easier.



IHS
CRANE
SCALE

pg.66

MODEL QUICK FINDER

	AELP	PTSplus	PTT	SHS, LHS & IHS	PT	PTM	GB & GF	W Series
Stainless steel pan							•	•
Seperate indicator	•				•	•	•	•
Suitable for pallet weighing	•	•	•		•			
Handles/wheels for portability	•	•	•			•		
Rechargeable battery		•	•	•				
Mild-steel base	•	•	•		•	•	•	
IP68 rated								•
Zero-tracking feature		•	•	•				



COMPATIBLE WITH




AE 403 Waterproof Indicator



AE 503 & AE 504 Label Printing Indicators



AE 505 Label Printing Indicator

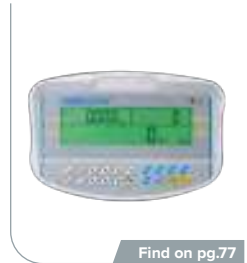

GC Counting Indicator



GK-S/GK-Plus Checkweighing Indicators


AELP beams are a portable, durable weighing solution that can be adjusted according to the size of the object being weighed, including containers, platforms and cages. Choose the indicator option that best fits your needs!



Low profile beams for easy loading with a pallet truck



Integrated handles and wheels for added portability

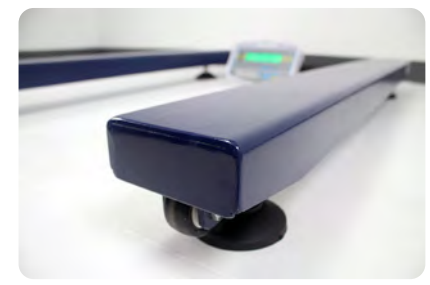

Heavy duty construction for industrial use


Features

- Approximately 15' / 5m shielded cable
- Can be stored away easily when not in use
- Can be used with any Adam indicator
- Two beams per set

General Specifications

- Housing: Mild steel base
- Operating temperature: -10° to 40°C / 14° to 104°F

Model	Capacity	Readability	Beam Size (x2)	List Price
AELP 1000	2200lb / 1000kg	0.5lb / 0.2kg	52.4"x4.7" / 1330x120mm	\$1,265.00
AELP 2000	4400lb / 2000kg	1lb / 0.5kg	52.4"x4.7" / 1330x120mm	\$1,265.00
AELP 3000	6600lb / 3000kg	2lb / 1kg	52.4"x4.7" / 1330x120mm	\$1,265.00

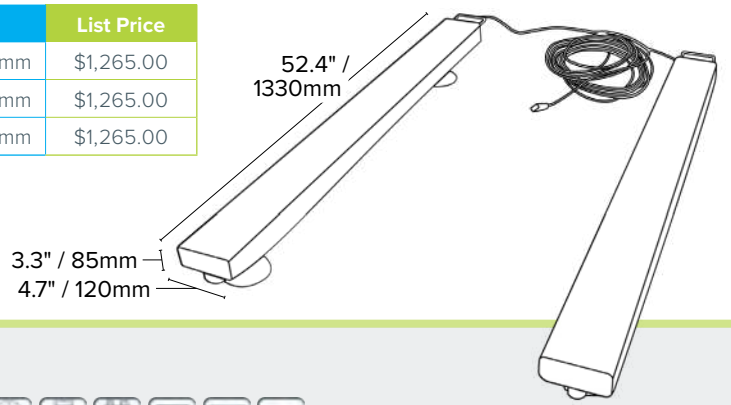

NOTE: All features & applications listed are indicator-dependent. List price is for platform only. See indicator page for indicator list pricing.



The PTSplus pallet truck scale offers an easy way to manage, move and weigh heavy loads. Heavy-duty reinforced steel pallet forks are generously sized and provide durable lifting capabilities. A zero-radius pivoting handle offers exceptional maneuverability in tight spots.



KEY ACCESSORIES



Calibration Certificate
See pg. 95



Stainless steel, IP68 waterproof indicator with large, clear LCD display



Rugged, heavy duty construction for daily industrial weighing



Backlit display changes color for easy checkweighing



Features

- Capacity tracker built into display for easily monitoring possible overloads
- Waterproof indicator housing is easy to clean
- Rechargeable battery included for operation almost anywhere
- Audible overload alarm warns when capacity is exceeded
- Checkweighing with audible alarm
- Parts counting with preset sample sizes
- Zero-tracking feature ensures display returns to zero reading

General Specifications

- Weighing units: kg, lb, lb:oz, oz, N
- Interface: RS-232
- Power supply: Internal rechargeable battery; 12VDC 3A adapter
- Battery life (up to): 120 hours
- Display: Backlit LCD with 1.6" / 40mm-high digits
- Calibration: External
- Housing: Mild steel base
- Operating temperature: -10° to 40°C / 14° to 104°F

Model	Capacity	Readability	Fork Size (x2)	List Price
PTSplus 5000a	5000lb / 2000kg	1lb / 0.5kg	47"x6.3" / 1200x160mm	\$2,720.00

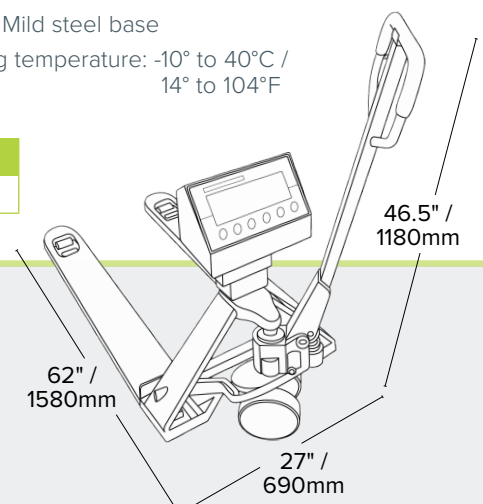

With a large rotating plated steel hook and shackle with safety catch, suspended loads can be safely weighed with strength and flexibility. LHS and IHS crane scales feature die cast aluminum housing. A standard remote control allows scale operation from a safe distance.



Remote included
(2 x AAA batteries, included)



IHS's solid metal housing resists spills and protects internal components



Rotating hook allows easy access while loading, then safely locks in place during weighing



Remote control allows safe, hands-free operation



IHS



SHS



LHS


Features

- Bright LED display for easy viewing in most environments
- Rechargeable battery included for operation almost anywhere
- Hold function freezes the displayed weight, allowing time to elapse without losing the result
- Zero-tracking feature ensures display returns to zero reading

Model	Capacity	Readability	List Price
SHS 100a	100lb / 50kg	0.02lb / 0.01kg	\$590.00
SHS 300a	300lb / 150kg	0.05lb / 0.02kg	\$610.00
SHS 600a	600lb / 300kg	0.1lb / 0.05kg	\$620.00
LHS 1000a	1000lb / 500kg	0.2lb / 0.1kg	\$1,000.00
LHS 3000a	3000lb / 1500kg	0.5lb / 0.2kg	\$1,145.00
LHS 4000a	4000lb / 2000kg	1lb / 0.5kg	\$1,415.00
IHS 2a	2000lb / 1000kg	0.5lb / 0.2kg	\$1,825.00
IHS 6a	6000lb / 3000kg	1 lb / 0.5kg	\$1,960.00
IHS 10a	10000lb / 5000kg	2lb / 1kg	\$2,245.00
IHS 20a	20000lb / 10000kg	5lb / 2kg	\$3,245.00

General Specifications

- Weighing units: kg, lb
- Power supply: Internal rechargeable battery;
 - SHS: 8.4VDC 800mA adapter, 4 x AA batteries (not included)
 - LHS: 6VDC 600mA adapter
 - IHS: 7.2VDC 2A adapter
- Battery life (up to):
 - SHS: 20 hours
 - LHS: 80 hours
 - IHS: 110 hours
- Display:
 - SHS: LED with 0.6" / 15mm-high digits
 - LHS: LED with 1" / 25mm-high digits
 - IHS: LED with 1.2" / 30mm-high digits
- Calibration: External
- Housing:
 - SHS: Polycarbonate
 - LHS / IHS: Die-cast aluminum
- Operating temperature:
 - 0° to 40°C / 32° to 104°F

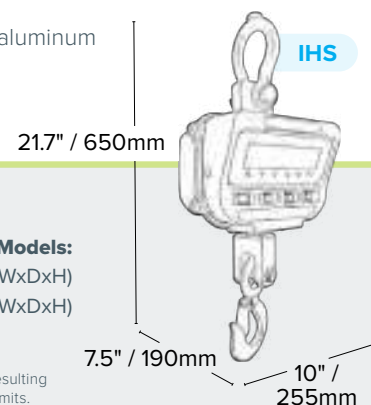

IHS



Other Models:

SHS: 5.7"x2.6"x12.6" / 146x65x320mm (WxDxH)
LHS: 7.7"x5.1"x17.7" / 195x130x450mm (WxDxH)



The PTM low-profile platform is ideal for weighing wheelchairs, barrels and oversized containers. Ramps on both sides offer smooth transitions between the floor and the weighing platform, while handles and wheels allow easy mobility.

COMPATIBLE WITH



Find on pg.73

AE 403 Waterproof Indicator



Find on pg.74-75

AE 503 & AE 504 Label Printing Indicators



Find on pg.76

AE 505 Label Printing Indicators



Find on pg.77

GC Counting Indicator



Find on pg.78-79


GK-S/GK-Plus Checkweighing Indicators



Integrated handles and wheels for transportation



Built-in ramps on either side make access easier

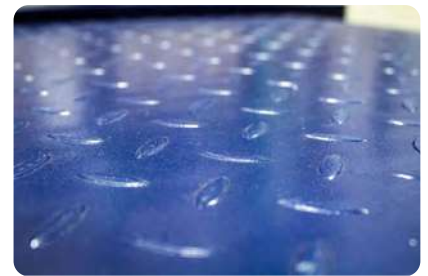

Tough, diamond plate surface for added grip

Features


- Heavy-duty rubber feet ensure stability of unit
- Adjustable levelling feet help optimize setup
- Approximately 10' / 3m load cell cable
- Rugged construction stands up to industrial use

General Specifications



- Weighing units*: kg, lb, lb:oz, oz, N
- Housing: Mild steel base
- Operating temperature: -10° to 40°C / 14° to 104°F

*Not all weighing units available on all indicator setups

Model	Capacity	Readability	Pan Size	List Price
PTM 500	1100lb / 500kg	0.2lb / 0.1kg	29.9"x22.8" / 760x580mm	\$1,375.00

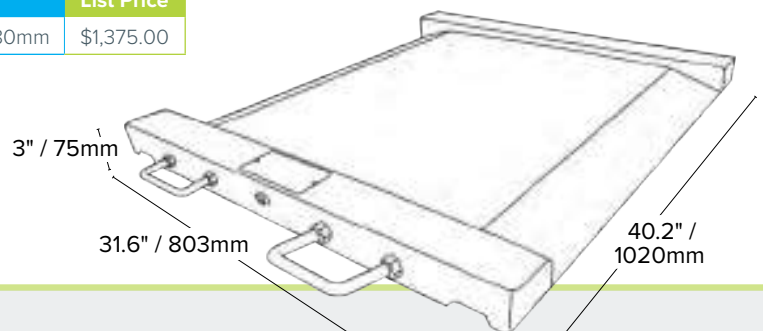

NOTE: All features & applications listed are indicator-dependent. List price is for platform only. See indicator page for indicator list pricing.

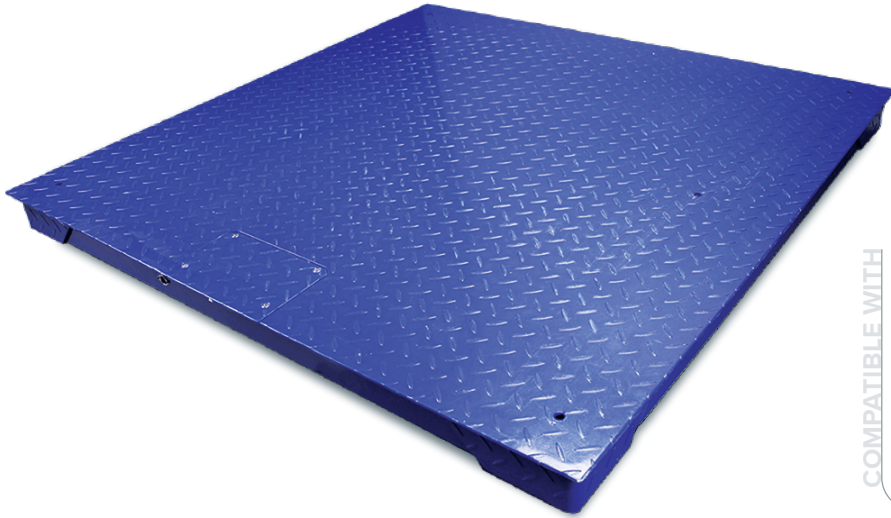

PT-S

COMPATIBLE WITH



Find on pg.73

AE 403 Waterproof Indicator



Find on pg.74-75

AE 503 & AE 504 Label Printing Indicators

The PT and PT-S platform scales are designed to weigh pallets, crates and large containers on warehouse and factory floors. PT platforms are compatible with several Adam indicators that can be used for checkweighing, parts counting and dynamic animal weighing.



Find on pg.76

AE 505 Label Printing Indicators



Find on pg.77

GC Counting Indicator



Find on pg.78-79


GK-S/GK-Plus Checkweighing Indicators



Reinforced construction suitable for demanding industrial use



Attachable eye hooks for easy transportation

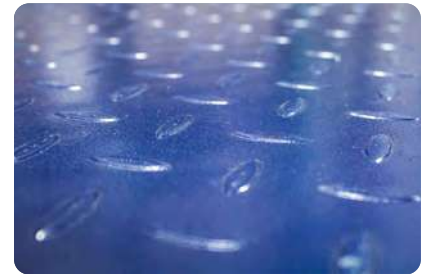

PT boasts a tough, diamond plate surface for added grip

Features

- Rugged construction stands up to industrial use
- Optional ramps facilitate loading and unloading
- Can be used with any Adam indicators
- Approximately 15-foot / 5-meter shielded cable
- PT-S offers IP66-rated protection against water and dust

General Specifications


- Weighing units*: kg, lb, lb:oz, oz, N
- Housing: Mild steel base
- Operating temperature: -10° to 40°C / 14° to 104°F

*Not all weighing units available on all indicator setups



[†]PT-S only

NOTE: All features & applications listed are indicator-dependent. List price is for platform only. See indicator page for indicator list pricing.

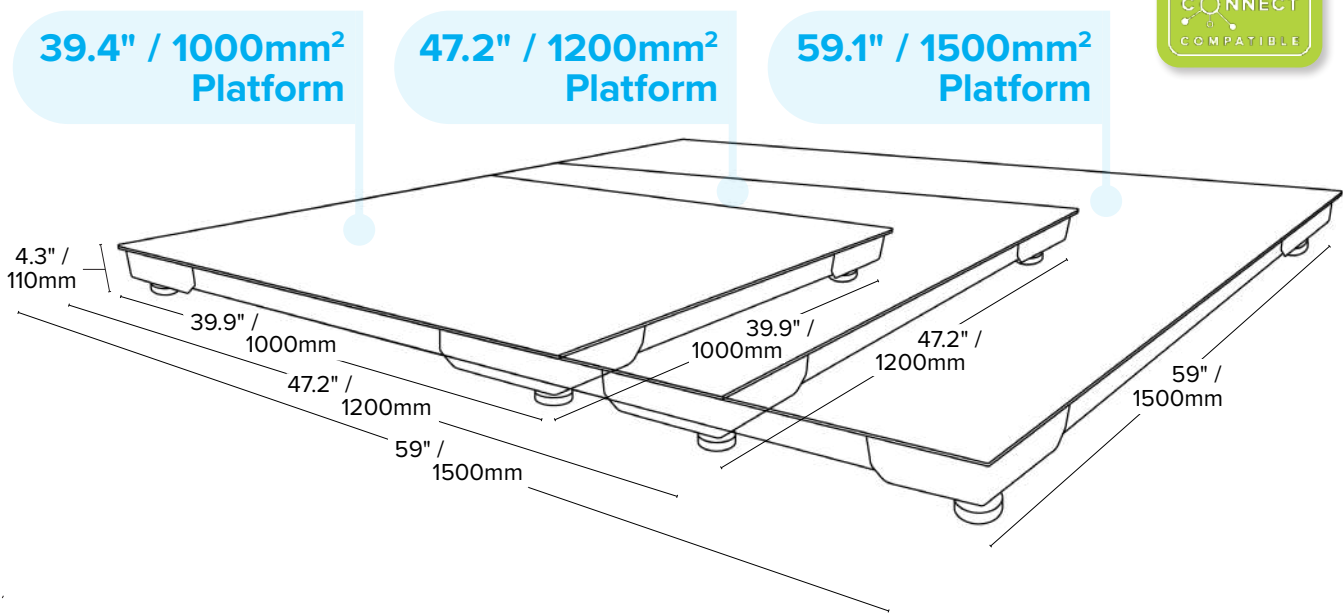

Model	Capacity	Readability	Pan Size	List Price
PT 110	2500lb / 1000kg	0.5lb / 0.2kg	39.4"x39.4" / 1000x1000mm	\$1,145.00
PT 310-5	5000lb / 3000kg	1lb / 0.5kg	39.4"x39.4" / 1000x1000mm	\$1,145.00
PT 310-10	10000lb / 4500kg	2lb / 1.0kg	39.4"x39.4" / 1000x1000mm	\$1,145.00
PT 112	2500lb / 1000kg	0.5lb / 0.2kg	47.2"x47.2" / 1200x1200mm	\$1,375.00
PT 312-5	5000lb / 3000kg	1lb / 0.5kg	47.2"x47.2" / 1200x1200mm	\$1,375.00
PT 312-10	10000lb / 4500kg	2.0lb / 1.0kg	47.2"x47.2" / 1200x1200mm	\$1,375.00
PT 115	2500lb / 1000kg	0.5lb / 0.2kg	59.1"x59.1" / 1500x1500mm	\$1,595.00
PT 315-5	5000lb / 3000kg	1lb / 0.5kg	59.1"x59.1" / 1500x1500mm	\$1,595.00
PT 315-10	10000lb / 4500kg	2lb / 1.0kg	59.1"x59.1" / 1500x1500mm	\$1,595.00


Trade Approved Models

Model	Capacity	Readability	Pan Size	List Price
PT 112M	2500lb / 1500kg	0.5lb / 0.2kg	47.2"x47.2" / 1200x1200mm	\$1,430.00
PT 312-5M	5000lb / 3000kg	1lb / 0.5kg	47.2"x47.2" / 1200x1200mm	\$1,430.00

Model	Capacity	Readability	Pan Size	List Price
PT 110S	2500lb / 1000kg	0.5lb / 0.2kg	39.4"x39.4" / 1000x1000mm	\$2,500.00
PT 310-5S	5000lb / 3000kg	1lb / 0.5kg	39.4"x39.4" / 1000x1000mm	\$2,500.00
PT 310-10S	10000lb / 4500kg	2lb / 1kg	39.4"x39.4" / 1000x1000mm	\$2,500.00
PT 112S	2500lb / 1000kg	0.5lb / 0.2kg	47.2"x47.2" / 1200x1200mm	\$2,915.00
PT 312-5S	5000lb / 3000kg	1lb / 0.5kg	47.2"x47.2" / 1200x1200mm	\$2,915.00
PT 312-10S	10000lb / 4500kg	2lb / 1kg	47.2"x47.2" / 1200x1200mm	\$2,915.00
PT 115S	2500lb / 1000kg	0.5lb / 0.2kg	59.1"x59.1" / 1500x1500mm	\$3,370.00
PT 315-5S	5000lb / 3000kg	1lb / 0.5kg	59.1"x59.1" / 1500x1500mm	\$3,370.00
PT 315-10S	10000lb / 4500kg	2lb / 1kg	59.1"x59.1" / 1500x1500mm	\$3,370.00

DID YOU KNOW?

Our industry-leading warranties, introduced in 2023, give more peace of mind when buying Adam products. Our brand new GBK/GFK-S and GBK/GFK-Plus scales, as well as their respective indicators, all come with a 5 year warranty.

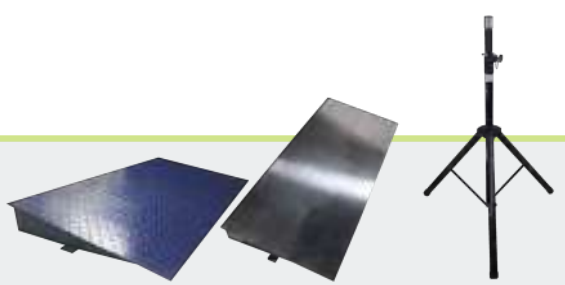


Steel Ramps
See pg. 94

Indicator Stand
See pg. 95






The W series of washdown platform scales stands up to demanding industrial environments with its rugged stainless steel construction. Pair these IP68-rated bases with the IP68-rated AE403 indicator for an unbeatable combination.

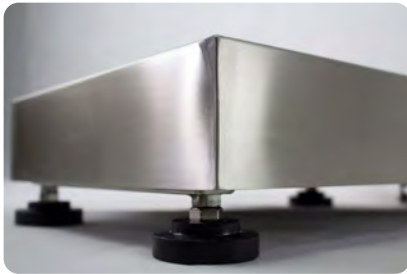

Rugged stainless steel construction for ultimate durability



IP68-rated for protection against water and dust

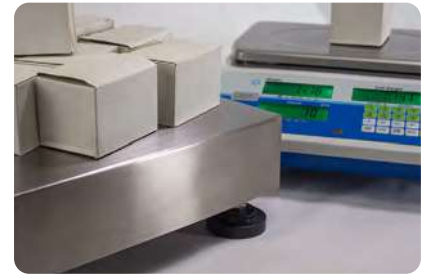

Can also be used as a second platform with CDT (see page 45)

Features

- Large, grade 304 stainless steel pan allows for easy cleaning
- IP68-rated for protection against water and dust
- Overload protection helps prevent damage to internal components



General Specifications

- Housing: Stainless steel
- Operating temperature: -10° to 40°C / 14° to 104°F

Model	Capacity	Readability	Pan Size	List Price
WS 16a	16lb / 8kg	0.001lb / 0.0005kg	9.8"x9.8" / 250x250mm	\$930.00
WS 35a	35lb / 16kg	0.002lb / 0.001kg	9.8"x9.8" / 250x250mm	\$930.00
WS 70a	70lb / 32kg	0.005lb / 0.002kg	9.8"x9.8" / 250x250mm	\$930.00
WB 70a	70lb / 32kg	0.005lb / 0.002kg	11.8"x15.7" / 300x400mm	\$1,055.00
WB 165a	165lb / 75kg	0.01lb / 0.005kg	11.8"x15.7" / 300x400mm	\$1,055.00
WF 165a	165lb / 75kg	0.01lb / 0.005kg	19.7"x15.7" / 500x400mm	\$1,455.00
WF 330a	330lb / 150kg	0.02lb / 0.01kg	19.7"x15.7" / 500x400mm	\$1,455.00
WL 330a	330lb / 150kg	0.02lb / 0.01kg	23.6"x17.7" / 600x450mm	\$1,710.00

Trade Approved Models

Model	Capacity	Readability	Pan Size	List Price
WS 15aM	15lb / 6kg	0.002lb / 0.001kg	9.8"x9.8" / 250x250mm	\$1,010.00
WS 30aM	30lb / 15kg	0.005lb / 0.002kg	9.8"x9.8" / 250x250mm	\$1,010.00
WS 60aM	60lb / 30kg	0.01lb / 0.005kg	9.8"x9.8" / 250x250mm	\$1,010.00
WB 60aM	60lb / 30kg	0.01lb / 0.005kg	15.7"x11.8" / 400x300mm	\$1,130.00
WB 150aM	150lb / 60kg	0.02lb / 0.01kg	15.7"x11.8" / 400x300mm	\$1,130.00
WF 150aM	150lb / 60kg	0.02lb / 0.01kg	19.7"x15.7" / 500x400mm	\$1,520.00
WF 300aM	300lb / 150kg	0.05lb / 0.02kg	19.7"x15.7" / 500x400mm	\$1,520.00
WL 300aM	300lb / 150kg	0.05lb / 0.02kg	23.6"x17.7" / 600x450mm	\$1,765.00
WL 600aM	600lb / 300kg	0.1lb / 0.05kg	23.6"x17.7" / 600x450mm	\$1,865.00

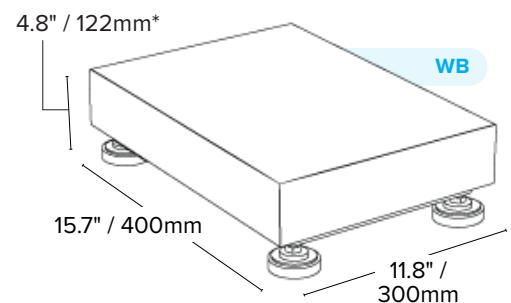


Other Models:

WS: 9.8"x9.8"x3.7" / 250x250x95mm (WxDxH)*

WF: 15.7"x19.7"x5.2" / 400x500x133mm (WxDxH)*

WL: 17.7"x23.6"x6.5" / 450x600x165mm (WxDxH)*


*Minimum height with feet wound up

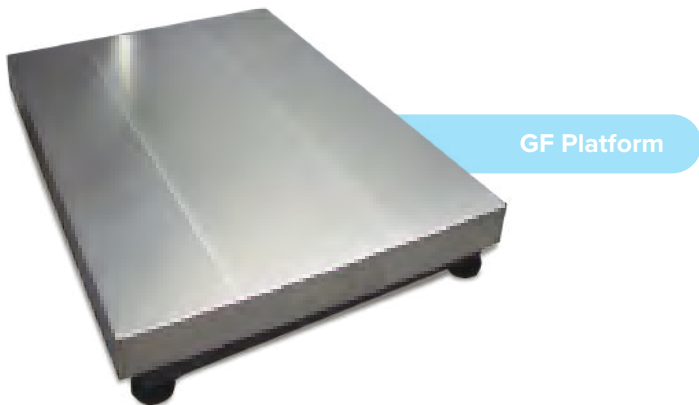

Featuring a removable stainless steel pan, GB platform scales offer a durable solution for industrial applications such as weighing, parts counting, percentage weighing and comparative weighing.



Rugged build quality stands up to industrial use

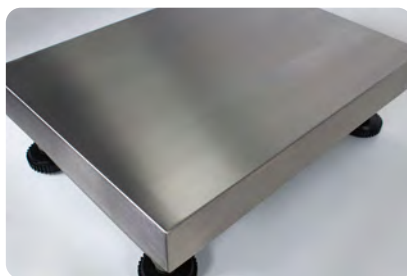

Durable stainless steel pan; overload protection



Can also be used as a second platform for Cruiser CDT (see page 45)


Features

- Can be used with any Adam indicator
- Overload protection helps prevent damage
- Large, grade 304 stainless steel pan allows for easy cleaning

General Specifications

- Calibration: External
- Housing: Mild steel base
- Operating temperature: -10° to 40°C / 14° to 104°F

Model	Capacity	Readability	Pan Size	List Price
GB 16a	16lb / 8kg	0.0002lb / 0.0001kg	15.7"x11.8" / 400x300mm	\$645.00
GB 35a	35lb / 16kg	0.001lb / 0.0005kg	15.7"x11.8" / 400x300mm	\$645.00
GB 70a	70lb / 32kg	0.002lb / 0.001kg	15.7"x11.8" / 400x300mm	\$645.00
GB 130a	130lb / 60kg	0.005lb / 0.002kg	15.7"x11.8" / 400x300mm	\$645.00
GB 260a	260lb / 120kg	0.01lb / 0.005kg	15.7"x11.8" / 400x300mm	\$645.00
GF 165a	165lb / 75kg	0.01lb / 0.005kg	19.7"x15.7" / 500x400mm	\$720.00
GF 330a	330lb / 150kg	0.02lb / 0.01kg	19.7"x15.7" / 500x400mm	\$720.00
GF 660a	660lb / 300kg	0.05lb / 0.02kg	19.7"x15.7" / 500x400mm	\$720.00
GF 1320a	1320lb / 600kg	0.1lb / 0.05kg	31.5"x23.6" / 800x600mm	\$990.00

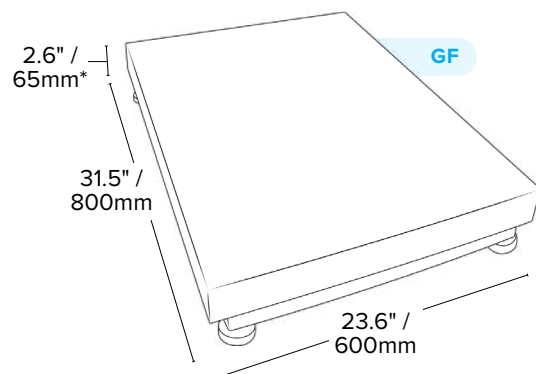

Other Models:

GB: 11.8"x15.7"x2.6" / 300x400x65mm (WxDxH)*

*Minimum height with feet wound up

72 WEIGHING INDICATORS

Flexible and affordable, Adam Equipment's weighing scale indicators are well-suited for use in warehouses, production lines, shipping and receiving departments, and during packaging, processing and inventory control jobs. From basic models to IP68-rated washdown versions, Adam's indicators deliver the durability and versatility needed to perform weighing and counting tasks.

Adam indicators can be configured with a number of platforms, allowing users to combine the features, functions, readability and capacity to suit their needs. Adam indicators provide a wide range of features, including large displays, numeric keypads and colored LEDs to simplify weighing, checkweighing and counting tasks.



NEW

AE505 INDICATOR *pg.76*



Built-in Printer

Print fully customized labels with weight data, barcodes and images



NEW Touch-screen Display

For more intuitive operation than ever



KEY ACCESSORIES



Indicator Stand
See pg. 95

A rugged stainless steel design and IP68 rating make AE 403 the right choice for a variety of industrial applications. The backlit display shows results in 1.6" / 40mm-high digits and changes color when the weight is over, under or within limits.



IP68 waterproof stainless steel housing



RS-232 interface provides speedy connection to computers and printers



Color-changing backlight for easier checkweighing

Features

- IP68-rated for protection against water and dust
- Capacity tracker built into display
- Wall-mount bracket provided
- Checkweighing with audible alarm
- Selectable digital filtering
- User-selectable scale division
- Rechargeable battery for operation almost anywhere

General Specifications



- Weighing units*: g, kg, lb, lb:oz, oz, N
- Interface: RS-232
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 120 hours
- Display: Backlit LCD with 1.6" / 40mm-high digits
- Calibration: External
- Housing: Stainless steel
- Operating temperature: -10° to 40°C / 14° to 104°F

*lb:oz and N are not legal-for-trade weighing units

Model	Capacity	Readability	List Price
AE 403a	Selectable	80,000 divisions	\$470.00

Trade Approved Models

Model	Capacity	Readability	List Price
AE 403aM	Selectable	6,000 divisions	\$565.00

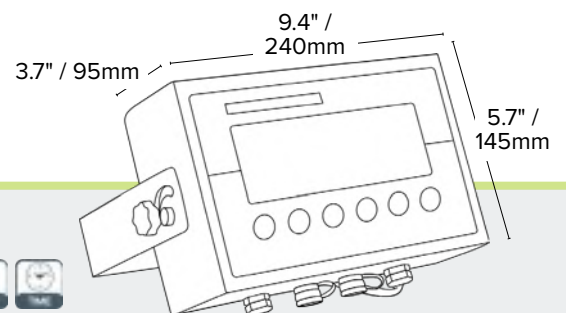




KEY ACCESSORIES



Labels
See pg. 91

The AE 503 label printing indicator combines weighing applications and a printer in one easy-to-use device, providing an ideal solution for manufacturing, packing and distribution needs.

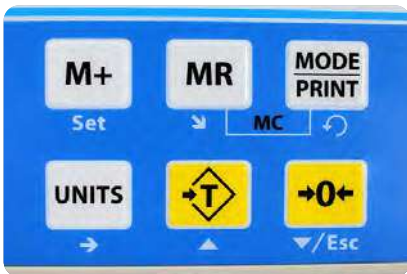

Simple six-button keypad for straightforward operation



Print weight, QR codes, barcodes and customized labels in several languages



Large, 1.3" / 34mm-high digits on vivid, backlit display


Features

- Rechargeable battery included for operation almost anywhere
- Parts counting optimization automatically refines piece weight as parts are added
- Basic checkweighing
- User-selectable scale division
- Zero-tracking feature ensures display returns to zero reading
- Rugged construction stands up to industrial use

General Specifications

- Weighing units: g, kg, lb, oz, ct, dr, mm, T, tonne
- Interface: RS-232
- Power supply: 12VDC 3A adapter, Internal rechargeable battery
- Battery life (up to): 110 hours
- Display: Backlit LCD with 1.3" / 34mm-high digits
- Calibration: External
- Housing: ABS Plastic
- Operating temperature: 0° to 40°C / 32° to 104°F
- Standard label size (WxH): 2"x1.2" / 50x30mm (labels up to 2.4" / 60mm height can be used)

Model	Capacity	Readability	List Price
AE 503	Selectable	80,000 divisions	\$660.00

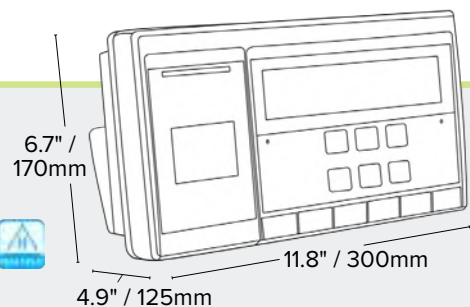



KEY ACCESSORIES



Indicator Stand
See pg. 95

The AE 504 advanced label printing indicator pairs a full range of counting applications with the ability to print fully customizable labels and barcodes into a single compact solution.



Vivid backlit LCD display easily visible in any lighting conditions



Print weight, QR codes, barcodes and customized labels in several languages



Numeric keypad allows selection from 1,006 PLUs



Features

- Rechargeable battery included for operation almost anywhere
- Parts counting optimization automatically refines piece weight as parts are added
- Checkweighing with audible alarm
- User-selectable scale division
- Quick and easy configuration using the keypad
- Zero-tracking feature ensures display returns to zero reading
- Rugged construction stands up to industrial use

General Specifications

- Weighing units: g, kg, lb, oz
- Interface: RS-232
- Power supply: 12VDC 3A adapter, Internal rechargeable battery
- Battery life (up to): 110 hours
- Display: Backlit LCD with 0.9" / 22mm-high digits
- Calibration: External
- Housing: ABS Plastic
- Operating temperature: 0° to 40°C / 32° to 104°F
- Standard label size (WxH): 2"x1.2" / 50x30mm (labels up to 2.4" / 60mm height can be used)
- PLUs: 1,006

Model	Capacity	Readability	List Price
AE 504	Selectable	80,000 divisions	\$785.00

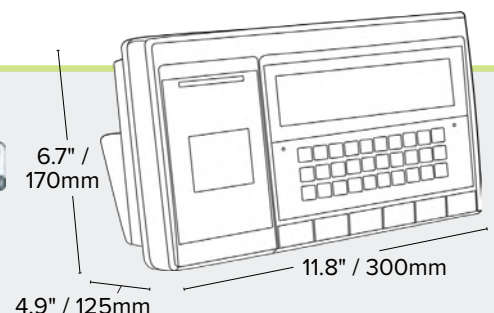



KEY ACCESSORIES



Labels
See pg. 91

AE 505 combines the ease and intuitive navigation of an 8" / 200mm touch-screen display with the convenience of a built-in printer. In addition to customized labels, AE 505 stores up to 10 label designs.



Large, 8-inch touch-screen display allows easy, intuitive operation



RS-232, USB or optional ethernet, Wi-Fi or Bluetooth connectivity



Retains up to 10 customized label designs in its memory for fast recall



Features

- Quick and intuitive touch-screen operation
- Create customized labels with date, time, weight, logo, barcode, QR code and more
- Easy connectivity through USB, RS-232 or optional RJ45 ethernet, Wi-Fi or Bluetooth
- Rechargeable battery included for operation almost anywhere
- Memory accumulation totals results
- Parts counting with freely selectable sample sizes
- Can be used with a barcode scanner

General Specifications

- Weighing units: g, kg, lb, lb:oz, oz, ct, dr, mm, TI T, T
- Interface: RS-232, USB, RJ45 (optional), Bluetooth (optional)
- Power supply: 12VDC 3A adapter, Internal rechargeable battery
- Display: 8" / 200mm touch-screen
- Calibration: External
- Housing: ABS plastic
- Standard label size (WxH): 50x30mm (labels up to 60mm height can be used)
- Operating temperature: 0° to 40°C / 32° to 104°F

Model	Capacity	Readability	List Price
AE 505	Selectable	80,000 divisions	\$955.00

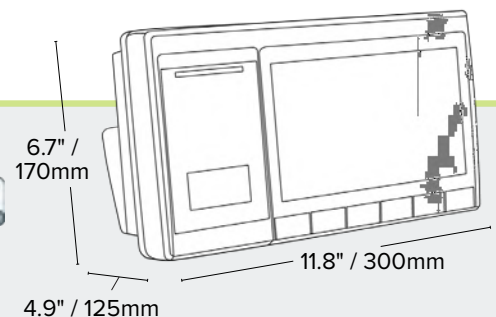



KEY ACCESSORIES



ATP2 Thermal Printer
See pg. 93



Indicator Stand
See pg. 95

With a wide range of features, the GC counting indicator is ideal for parts counting tasks. Its numeric keypad facilitates unit weight and sample entry, while the display shows unit weight, total weight and number of pieces.



RS-232 interface for sending data to PCs and printers



Piece weight, total weight and piece count clearly visible in one place



Splash-proof housing, keypad and display are easy to clean


Features

- Vivid, backlit LCD easily visible in any lighting conditions
- Capacity tracker built into display
- Solid ABS housing provides durability for industrial use
- Wall-mount bracket for placing indicator on vertical surface
- Internal counting resolution of 1:600,000 for precise results
- Parts counting with freely selectable sample sizes
- Selectable digital filtering
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Programmable capacity and readability

General Specifications

- Weighing units: g, kg, lb
- Interface: RS-232, Optional USB
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 120 hours
- Display: Backlit LCD with 0.8" / 20mm-high digits
- Calibration: External
- Housing: ABS plastic
- Operating temperature: -10° to 40°C / 14° to 104°F

Model	Capacity	Readability	List Price
GCa	Selectable	60,000 divisions	\$530.00

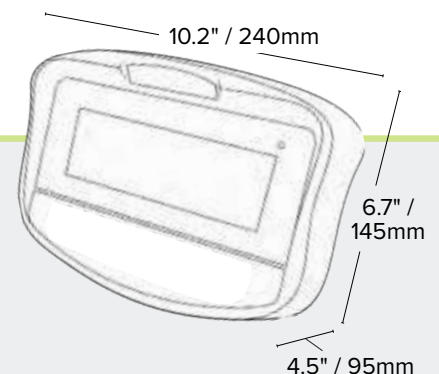



KEY ACCESSORIES



Indicator Stand
See pg. 95

Connecting the trade-approved GKaM indicator to any Adam platform scale provides speedy operation for numerous weighing applications. The indicator features solid ABS plastic construction, with a full keypad and a brightly backlit LCD with easy-to-read digits.



RS-232 interface for sending data to PCs and printers



"Traffic light" style checkweighing LEDs and audible alarm for faster checkweighing



Splash-proof housing, keypad and display are easy to clean


Features

- Capacity tracker built into display
- Solid ABS housing provides durability for industrial use
- Splash-proof housing, keypad and display are easy to clean
- Quick and easy configuration using the full numeric keypad
- Wall-mount bracket for placing indicator on vertical surface
- Parts counting optimization automatically refines piece weight as parts are added
- Selectable digital filtering
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Programmable capacity and readability
- 1:600,000 internal counting resolution for precise results

General Specifications

- Weighing units: g, kg, lb, oz
- Interface: RS-232, Optional USB
- Power supply: 12VDC 800mA adapter, Internal rechargeable battery
- Battery life (up to): 120 hours
- Display: Backlit LCD with 0.8" / 20mm-high digits
- Calibration: External
- Housing: ABS plastic
- Operating temperature: -10° to 40°C / 14° to 104°F

Model	Capacity	Readability	List Price
GKaM	Selectable	60,000 divisions	\$440.00

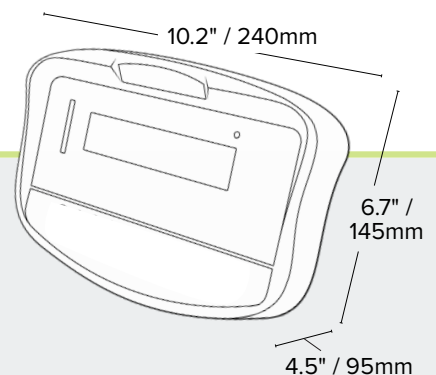



ATP2 Thermal Printer
See pg. 93

For easier checkweighing, choose our GK-S and GK-Plus indicators. Feature-rich and easy to use, both indicators have color-coded checkweighing lights with an audible alarm. GK-Plus also offers a full numeric keypad to enter checkweighing limits.



STANDARD MODELS

Simple, 5-button keypad layout for quick and easy weighing tasks



PLUS MODELS

Full numeric keypad for easier checkweighing



Backlight changes color for quick notification of checkweighing limits


Features

- Vivid, backlit LCD easily visible in any lighting conditions
- Capacity tracker built into display
- Solid ABS housing provides durability for industrial use
- Wall-mount bracket for placing indicator on vertical surface
- Internal counting resolution of 1:1,00,000 for precise results
- Parts counting with freely selectable sample sizes
- Selectable digital filtering
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Programmable capacity and readability

General Specifications

- Weighing units: g, kg, lb
- Interface: RS-232, Optional USB
- Power supply:
 - Plus: Power cord, internal rechargeable battery
 - S: 12VDC 800mA adapter, internal rechargeable battery (optional)
- Battery life (up to): 120 hours
- Display: Backlit LCD with 1.6" / 40mm-high digits
- Calibration: External
- Housing: ABS plastic
- Operating temperature: -10° to 40°C / 14° to 104°F

Model	Capacity	Readability	List Price
GK-S	Selectable	80,000 divisions	\$340.00
GK-Plus	Selectable	80,000 divisions	\$410.00

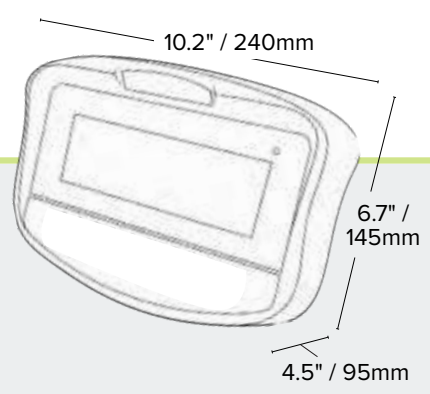

*GK-Plus only

80

HEALTH & FITNESS SCALES

Adam Equipment offers a full line of scales and balances for health and fitness applications. With rugged construction, easy operation and practical features, our balances and scales can be found in nursing homes, rehab centres, spas, schools, fitness facilities, gyms and veterinary practices.

Easy to use, Adam's health and fitness scales are suitable for a variety of tasks, including weighing, body mass index (BMI) calculation, ultrasonic and mechanical height assessment, blood bag measurement, food portioning for weight control, and measuring ingredients for herbal tonics, tinctures, bulk compounds and nutritional supplements.

BMI Function

Keep track of weight and body mass with the BMI (body mass index) function




Height Rod

Facilitates measuring children and adults while weighing



Metal Construction

Rugged metal base and pillar

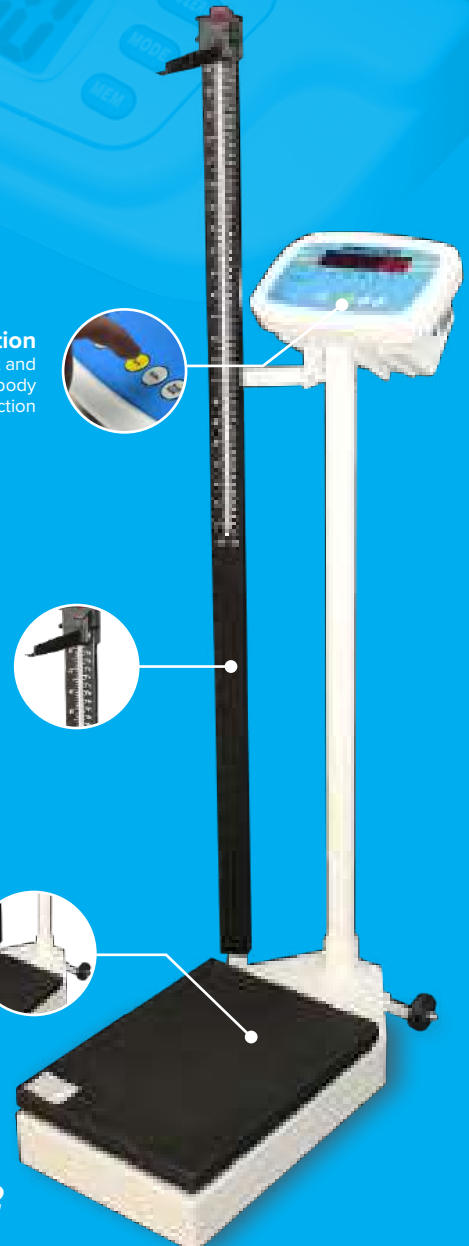



MTB without Cradle

Versatile and portable, the MTB offers excellent value for tasks such as weighing infants, toddlers or small animals. A cleverly designed ergonomic cradle – which provides comfortable support for babies and locks securely in place – removes easily to reveal a non-slip rubber mat underneath, simplifying the task of weighing toddlers or small animals.



Removable cradle to reveal non-slip base underneath



Lightweight design for added portability



Ergonomic cradle for comfort and support


Features

- Simple operation allows quick startup
- High-contrast display is easily visible from a distance
- Remove blanket weight using tare function
- Operates with AC adapter (included) or batteries (not included)

General Specifications

- Weighing units: kg, lb
- Power supply: 6VDC 500mA adapter, 4 x AA batteries (not included)
- Display: LCD with 1.1" / 29mm-high digits
- Calibration: External
- Housing: ABS Plastic
- Operating temperature: 10° to 40°C / 50° to 104°F

Model	Capacity	Readability	Pan Size	List Price
MTB 20	44lb / 20kg	0.01lb / 0.005kg	22"x11.2" / 560x285mm	\$220.00

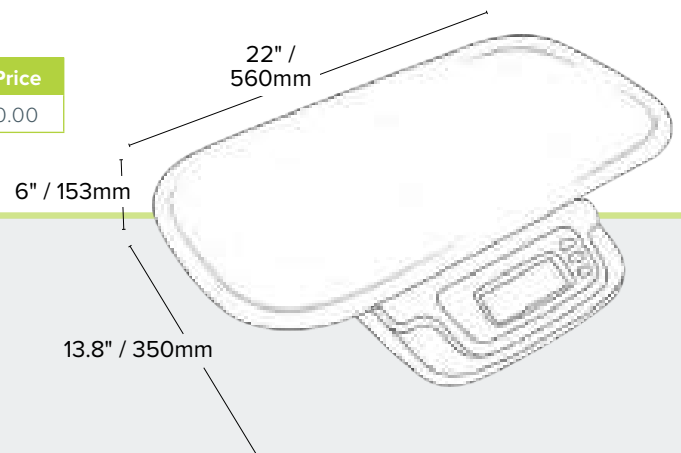

With a modern, robust design, MDW digital scales offer affordable precision for healthcare and fitness facilities. The MDW provides precise height, weight and BMI measurement, and features a rugged metal base with non-slip weighing platform.



KEY ACCESSORIES



Calibration Certificate
See pg. 95



ATP2 Thermal Printer
See pg. 93



Weight readings are bright and clear on the LED display



Compact, solid, anti-slip platform



Height rod helps with BMI calculation


Features

- Metal construction for base and pillar
- Integrated wheels allows for easy transport
- Body Mass Index (BMI) calculation

General Specifications

- Weighing units: kg, lb
- Display: LED with 0.9" / 22mm-high digits
- Calibration: External
- Operating temperature: 5° to 40°C / 41° to 104°F
- Power supply: 12VDC 500mA adapter, Internal rechargeable battery
- Battery life (up to): 50 hours
- Interface: RS-232



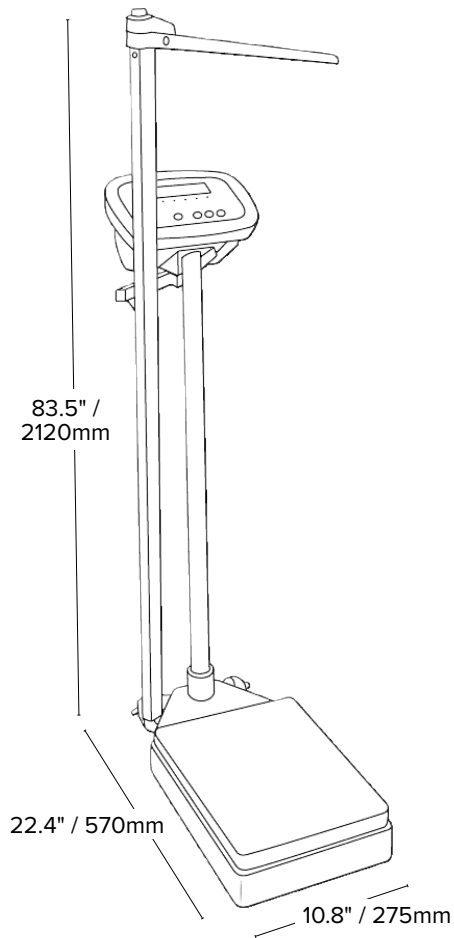

MDW with height rod fully extended

Model	Capacity	Readability	Pan Size	Height Rod Max	List Price
MDW 300L	660lb / 300kg	0.1lb / 0.05kg	14.8"x10.8" / 375x275mm	83.5" / 212cm	\$665.00

DID YOU KNOW?



You can use the MDW's height rod to calculate BMI. Simply enter your height into the scale and BMI will display instantly. This makes the MDW an affordable option for any gym or health club needing a reliable, professional weighing scale.

84 WEIGHTS & ACCESSORIES

Adam Equipment's weighing accessories can provide added protection for your weighing scale or balance, and also can increase performance and boost efficiency.

Certain industries require adherence to a particular set of practices or standards; printers, weighing pans, and other helpful tools are available to ensure accurate readings and best practices. GLP guidelines are easy to follow using Adam printers and data collection software. To simplify data collection, AdamDU software enables users to capture data from any connected Adam Equipment balance, whether by cable or wirelessly!

Adam offers several accessory kits that can simplify certain applications. Combined with our precision or analytical balances, Adam's density kit makes density determination easy and precise. A temperature calibration kit for our PMB Moisture Analyzer can help maintain proper settings of the temperature sensor and heating element.





ASTM 1 Weight Set



OIML E1 Weight Set



OIML E2 Weight Set




OIML M1 Weight Set

ASTM and OIML stainless steel calibration weights are used to test and calibrate Adam balances within ASTM and OIML standards, respectively. ASTM 0 and OIML E1 / E2 weights offer the highest accuracy ideal for analytical and precision balances, followed by ASTM 1, 2 and 3, or OIML F1 weights, suitable for precision balances. ASTM 4 and OIML M1 weights are reserved for the largest capacities.



Choose complete weight sets or single weights

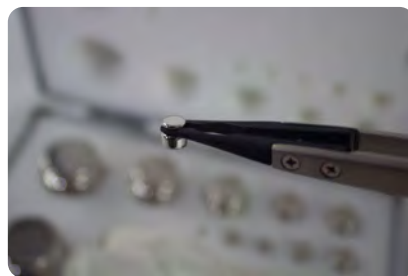

Ensure that your scale or balance provides accurate results



All weights meet requirements for testing to ASTM or OIML standards



NOTE: OIML weights ship from the UK only. Shipping costs and times vary depending on location.

Continued on next page ▶



Weight Sets

ASTM

Part Number	Class	Weight	List Price
700100437	ASTM 0	1mg-50g	\$3,065.00
700100354	ASTM 1	1g-200g	\$875.00
700100355	ASTM 1	1g-500g	\$1,305.00
700100357	ASTM 2	1g-200g	\$805.00
700100356	ASTM 2	1g-500g	\$1,135.00
700100382	ASTM 4	1g-200g	\$580.00
700100383	ASTM 4	1g-500g	\$910.00
700100384	ASTM 4	1g-1kg	\$1,195.00

OIML

Part Number	Class	Weight	List Price	Part Number	Class	Weight	List Price
700100419	OIML E1	1mg-50g	\$3,590.00	700100049	OIML F1	1g-200g	\$620.00
700100420	OIML E1	1mg-100g	\$3,945.00	700100042	OIML F1	1g-500g	\$815.00
700100421	OIML E1	1mg-200g	\$4,910.00	700100070	OIML F1	1g-2kg	\$1,270.00
700100026	OIML E2	1mg-200g	\$1,700.00	700100035	OIML M1	1g-100g	\$175.00
700100207	OIML E2	1g-200g	\$1,205.00	700100037	OIML M1	1g-200g	\$215.00
700100028	OIML F1	1mg-200g	\$880.00	700100228	OIML M1	1g-500g	\$315.00
700100011	OIML F1	1mg-500g	\$1,070.00	700100071	OIML M1	1g-2kg	\$585.00
700100027	OIML F1	1g-100g	\$520.00				

ASTM Weights



Part Number	Class	Weight	List Price
700100423	ASTM 0	20g	\$230.00
700100424	ASTM 0	50g	\$240.00
700100186	ASTM 0	100g	\$285.00
700100430	ASTM 0	200g	\$465.00
700100347	ASTM 1	1g	\$105.00
700100348	ASTM 1	2g	\$110.00
700100349	ASTM 1	5g	\$115.00
700100350	ASTM 1	10g	\$120.00
700100351	ASTM 1	50g	\$130.00
700100352	ASTM 1	100g	\$135.00
700100188	ASTM 1	200g	\$155.00
700100189	ASTM 1	500g	\$170.00

Part Number	Class	Weight	List Price
700100353	ASTM 1	1000g	\$410.00
700100191	ASTM 1	2000g	\$465.00
700100358	ASTM 2	1g	\$95.00
700100359	ASTM 2	2g	\$100.00
700100360	ASTM 2	5g	\$105.00
700100361	ASTM 2	10g	\$110.00
700100362	ASTM 2	50g	\$115.00
700100187	ASTM 2	100g	\$120.00
700100363	ASTM 2	200g	\$125.00
700100364	ASTM 2	500g	\$150.00
700100190	ASTM 2	1000g	\$255.00
700100365	ASTM 2	2000g	\$420.00
700100366	ASTM 3	1g	\$80.00
700100367	ASTM 3	2g	\$85.00
700100368	ASTM 3	5g	\$95.00
700100369	ASTM 3	10g	\$100.00

Part Number	Class	Weight	List Price
700100194	ASTM 3	50g	\$105.00
700100370	ASTM 3	100g	\$110.00
700100195	ASTM 3	200g	\$115.00
700100371	ASTM 3	500g	\$140.00
700100372	ASTM 3	1000g	\$240.00
700100373	ASTM 3	2000g	\$390.00
700100193	ASTM 3	5000g	\$560.00
700100374	ASTM 4	10g	\$85.00
700100375	ASTM 4	50g	\$95.00
700100376	ASTM 4	100g	\$100.00
700100377	ASTM 4	200g	\$105.00
700100378	ASTM 4	500g	\$130.00
700100379	ASTM 4	1000g	\$220.00
700100192	ASTM 4	2000g	\$370.00
700100380	ASTM 4	5000g	\$550.00
700100381	ASTM 4	10000g	\$1155.00

OIML Weights



Part Number	Class	Weight	List Price
700100398	OIML E1	5g	\$140.00
700100399	OIML E1	10g	\$195.00
700100400	OIML E1	20g	\$210.00
700100401	OIML E1	50g	\$225.00
700100232	OIML E2	50g	\$135.00
700100022	OIML E2	100g	\$160.00
700100023	OIML E2	200g	\$220.00
700100019	OIML F1	1g	\$45.00
700100018	OIML F1	2g	\$45.00

Part Number	Class	Weight	List Price
700100017	OIML F1	5g	\$55.00
700100016	OIML F1	10g	\$60.00
700100015	OIML F1	20g	\$70.00
700100014	OIML F1	50g	\$80.00
700100007	OIML F1	100g	\$90.00
700100012	OIML F1	200g	\$110.00
700100008	OIML F1	500g	\$155.00
700100009	OIML F1	1kg	\$230.00
700100010	OIML F1	2kg	\$290.00
700100013	OIML F1	5kg	\$570.00
700100065	OIML M1	1g	\$20.00
700100066	OIML M1	2g	\$20.00
700100067	OIML M1	5g	\$20.00

Part Number	Class	Weight	List Price
700100068	OIML M1	10g	\$20.00
700100069	OIML M1	20g	\$25.00
700100058	OIML M1	50g	\$25.00
700100059	OIML M1	100g	\$35.00
700100072	OIML M1	200g	\$40.00
700100060	OIML M1	500g	\$70.00
700100029	OIML M1	1kg	\$100.00
700100030	OIML M1	2kg	\$175.00

Part Number	Class	Weight	List Price
700100181	OIML M1	5kg	\$150.00
700100182	OIML M1	10kg	\$195.00
700100183	OIML M1	20kg	\$250.00



These are the maximum permissible errors for calibration weights as supplied by Adam. During calibration of mass standards and weights, the measurement uncertainty for coverage factor $k=2$ shall not be greater than one third of maximum permissible error value specified for a particular mass standard of weight of a given class or nominal value.

ASTM

Weight	Class 0	Class 1	Class 2	Class 3	Class 4
10kg	13mg	25mg	50mg	100mg	200mg
5kg	6mg	12mg	25mg	50mg	100mg
2kg	2.5mg	5mg	10mg	20mg	40mg
1kg	1.3mg	2.5mg	5mg	10mg	20mg
500g	0.6mg	1.2mg	2.5mg	5mg	10mg
200g	0.25mg	0.5mg	1mg	2mg	4mg
100g	0.13mg	0.25mg	0.5mg	1mg	2mg
50g	0.06mg	0.12mg	0.25mg	0.6mg	1.2mg
10g	0.025mg	0.05mg	0.074mg	0.25mg	0.5mg
5g	0.017mg	0.034mg	0.054mg	0.18mg	0.36mg
2g	0.017mg	0.034mg	0.054mg	0.13mg	0.26mg
1g	0.017mg	0.034mg	0.054mg	0.10mg	0.20mg

OIML

Weight	Class E1	Class E2	Class F1	Class F2	Class M1
5000kg			250,000mg	80,000mg	250,000mg
2000kg			10,000mg	30,000mg	100,000mg
1000kg		1,600mg	5,000mg	16,000mg	50,000mg
500kg		800mg	2,500mg	8,000mg	25,000mg
200kg		300mg	1,000mg	3,000mg	10,000mg
100kg		160mg	500mg	1,600mg	5,000mg
50kg	25mg	80mg	250mg	800mg	2,500mg
20kg	10mg	30mg	100mg	300mg	1,000mg
10kg	5mg	16mg	50mg	160mg	500mg
5kg	2.5mg	8mg	25mg	80mg	250mg
2kg	1mg	3mg	10mg	30mg	100mg
1kg	0.5mg	1.6mg	5mg	16mg	50mg
500g	0.25mg	0.8mg	2.5mg	8mg	25mg
200g	0.1mg	0.3mg	1mg	3mg	10mg
100g	0.05mg	0.16mg	0.5mg	1.6mg	5mg
50g	0.03mg	0.1mg	0.3mg	1mg	3mg
20g	0.025mg	0.08mg	0.25mg	0.8mg	2.5mg
10g	0.02mg	0.06mg	0.2mg	0.6mg	2mg
5g	0.016mg	0.05mg	0.16mg	0.5mg	1.6mg
2g	0.012mg	0.04mg	0.12mg	0.4mg	1.2mg
1g	0.01mg	0.03mg	0.1mg	0.3mg	1mg
500mg	0.008mg	0.025mg	0.08mg	0.25mg	0.8mg
200mg	0.006mg	0.02mg	0.06mg	0.2mg	0.6mg
100mg	0.005mg	0.016mg	0.05mg	0.16mg	0.5mg
50mg	0.004mg	0.012mg	0.04mg	0.12mg	0.4mg
20mg	0.003mg	0.01mg	0.03mg	0.1mg	0.3mg
10mg	0.003mg	0.008mg	0.025mg	0.08mg	0.25mg
5mg	0.003mg	0.006mg	0.02mg	0.06mg	0.2mg
2mg	0.003mg	0.006mg	0.02mg	0.06mg	0.2mg
1mg	0.003mg	0.006mg	0.02mg	0.06mg	0.2mg

Part Number	Description	Latitude LBX	Cruiser® CKT	CPWplus	GBK-S & GFK-S	GBK-Plus & GFK-Plus	AGB & AGF	BKT	BTT	List Price
3022014061	In-use Cover (Latitude)	•								\$20.00
3022013911	In-use Cover (Cruiser)		•							\$20.00
3052010526	In-use Cover (GBK-S/GFK-S/GBK-Plus/GFK-Plus)				•	•				\$20.00
3002014371	Hard Carrying Case with lock (Latitude)	•								\$95.00
302013912	Hard Carrying Case with lock (Cruiser)		•							\$90.00
700100099	Hard Carrying Case with lock (CPWplus standard)			•						\$90.00
303149759	Large Scoop (with fitting to scales)	•	•							\$120.00
303149760	Small Scoop (with fitting to scales)	•	•							\$120.00
1120015779	ATP2 Thermal Printer		•	•	•	•	•			\$270.00
3126011263	ATP2 Paper		•	•	•	•	•			\$15.00
3126011281	ATP2 Paper (x10)		•	•	•	•	•			\$95.00
1120014641	AIP Impact Printer		•	•	•	•	•			\$345.00
3126014659	AIP Paper		•	•	•	•	•			\$15.00
3126014660	AIP Paper (x10)		•	•	•	•	•			\$100.00
3004013214	Light Tower Kit w/ Relay Box						•			\$785.00
1100011297	Relay Box						•			\$190.00
3074010266	RS-232 Cable			•	•	•		•	•	\$35.00
700400103	RS-232 Cable (9 pin) — 10" / 254mm						•			\$35.00
3014011014	RS-232 Cable M-F — 5'11" / 1.8m		•		•	•				\$35.00
3074010507	RS-232 to USB Adapter			•	•	•	•	•	•	\$50.00
3074010267	USB Cable		•		•	•				\$35.00
2020013915	USB Option (type B)		•							\$90.00
202000001	Weigh-below Hook (factory-fitted)		•							\$130.00
700200059	Non-slip Rubber Mat for CPWplus L			•						\$35.00
600002028	AdamDU Data Collection Program		•	•	•	•	•	•	•	\$100.00
700660290	Calibration Certificate	•	•	•	•	•	•	•	•	\$95.00
700660288	Calibration Certificate for GFK-S 600/GFK-Plus 600/AGF 1320a/BKT 1320a				•	•	•	•		\$140.00
400005615	Labels (800 per roll)							•	•	\$15.00
1140013826	Roller deck (15.7" x 11.8" / 400 x 300mm)				•	•	•	•	•	\$285.00
1140013827	Roller deck (19.7" x 15.7" / 500 x 400mm)				•	•	•	•	•	\$385.00
1140013828	Roller deck (31.5" x 23.6" / 800 x 600mm)				•	•	•	•	•	\$695.00

Accessories for Counting Scales

Part Number	Description	Cruiser® CCT/CDT	GBC & GFC	BCT	List Price
3022013911	In-use Cover (Cruiser)	•			\$20.00
3052010526	In-use Cover (GBC/GFC)		•		\$20.00
302013912	Hard Carrying Case with lock (Cruiser)	•			\$90.00
303149759	Large Scoop (with fitting to scales)	•			\$120.00
303149760	Small Scoop (with fitting to scales)	•			\$120.00
1120015779	ATP2 Thermal Printer	•	•		\$270.00
3126011263	ATP2 Paper	•	•		\$15.00
3126011281	ATP2 Paper (x10)	•	•		\$95.00
1120014641	AIP Impact Printer	•	•		\$345.00
3126014659	AIP Paper	•	•		\$15.00
3126014660	AIP Paper (x10)	•	•		\$100.00
3074010266	RS-232 Cable	•	•		\$35.00
3074010507	RS-232 to USB Adapter		•	•	\$50.00
3074010267	USB Cable	•	•		\$35.00
2020013915	USB Option (type B)	•	•		\$90.00
600002028	AdamDU Data Collection Program	•	•	•	\$100.00
700660290	Calibration Certificate	•	•	•	\$95.00
400005615	Labels (800 per roll)			•	\$15.00
1140013826	Roller deck (15.7" x 11.8" / 400 x 300mm)		•	•	\$285.00
1140013827	Roller deck (19.7" x 15.7" / 500 x 400mm)		•	•	\$385.00
1140013828	Roller deck (31.5" x 23.6" / 800 x 600mm)		•	•	\$695.00

Part Number	Description	Aqua® ABW	Aqua® ABW-S	Gladiator® GGS/GGB/GGF/GGL	Swift® SWZ	List Price
3022014061	In-use Cover (ABW)	•				\$20.00
3022013911	In-use Cover (SWZ)				•	\$20.00
3002014371	Hard Carrying Case with Lock (ABW)	•				\$95.00
302013912	Hard Carrying Case with Lock (SWZ)				•	\$90.00
303149759	Large Scoop (with fitting to scales)	•	•		•	\$120.00
303149760	Small Scoop (with fitting to scales)	•	•		•	\$120.00
1120015779	ATP2 Thermal Printer			•	•	\$270.00
3126011263	ATP2 Paper			•	•	\$15.00
3126011281	ATP2 Paper (x10)			•	•	\$95.00
1120014641	AIP Impact Printer			•	•	\$345.00
3126014659	AIP Paper			•	•	\$15.00
3126014660	AIP Paper (x10)			•	•	\$100.00
3004013214	Light Tower Kit w/ Relay Box			•		\$785.00
1100011297	Relay Box			•		\$190.00
3074010266	RS-232 Cable			•		\$35.00
3014011014	RS-232 Cable M-F — 5'11" / 1.8m				•	\$35.00
3074010507	RS-232 to USB Adapter			•		\$50.00
2020013915	USB Option (type B)				•	\$90.00
600002028	AdamDU Data Collection Program			•	•	\$100.00
700660290	Calibration Certificate	•	•	•	•	\$95.00
1140013826	Roller deck (15.7" x 11.8" / 400 x 300mm)			•		\$285.00
1140013827	Roller deck (19.7" x 15.7" / 500 x 400mm)			•		\$385.00
1140013828	Roller deck (31.5" x 23.6" / 800 x 600mm)			•		\$695.00

Accessories for Heavy Duty Scales

Part Number	Description	SHS/LHS/IHS	PT	PTM	AELP	PTSpplus	PTT	List Price
2050013351	Indicator Stand		•	•	•			\$180.00
700100199	Mild Steel Ramp - PT 10R 39.4" / 1000mm wide		•					\$335.00
700100200	Mild Steel Ramp - PT 12R 47.2" / 1200mm wide		•					\$335.00
700100201	Mild Steel Ramp - PT 15R 59.1" / 1500mm wide		•					\$335.00
700100202	Stainless Steel Ramp - PT 10RS 39.4" /1000mm wide		•					\$425.00
700100203	Stainless Steel Ramp - PT 12RS 47.2" / 1200mm wide		•					\$425.00
700100204	Stainless Steel Ramp - PT 15RS 59.1" / 1500mm wide		•					\$425.00
700660288	Calibration Certificate	•		•				\$140.00
700660289	Calibration Certificate		•		•	•	•	\$160.00
1120015779	ATP2 Thermal Printer		•	•	•	•		\$270.00
3126011263	ATP2 Paper		•	•	•	•		\$15.00
3126011281	ATP2 Paper (x10)		•	•	•	•		\$95.00
1120014641	AIP Impact Printer		•	•	•	•		\$345.00
3126014659	AIP Paper		•	•	•	•		\$15.00
3126014660	AIP Paper (x10)		•	•	•	•		\$100.00
3074010507	RS-232 to USB Adapter		•	•	•	•	•	\$50.00
3004013214	Light Tower Kit w/ Relay Box (for AE 403)		•	•	•			\$785.00
1100011297	Relay Box (for AE 403)		•	•	•			\$190.00
400005615	Labels - 800 per roll						•	\$15.00
600002028	AdamDU Data Collection Program		•	•	•	•	•	\$100.00

Part Number	Description	AE 403	AE 503/504	AE 505	GC	GK-S	GK-Plus & GKaM	List Price
3102014653	In-use Cover (AE 403)	•						\$20.00
3052010526	In-use Cover (GC/GK-S/GK-Plus/GKaM)				•	•	•	\$20.00
2050013351	Indicator Stand	•	•	•	•	•	•	\$180.00
1120015779	ATP2 Thermal Printer	•			•	•	•	\$270.00
3126011263	ATP2 Paper	•			•	•	•	\$15.00
3126011281	ATP2 Paper (x10)	•			•	•	•	\$95.00
1120014641	AIP Impact Printer	•			•	•	•	\$345.00
3126014659	AIP Paper	•			•	•	•	\$15.00
3126014660	AIP Paper (x10)	•			•	•	•	\$100.00
3014011014	RS-232 Cable M-F — 5'11" / 1.8m				•	•	•	\$35.00
3074010507	RS-232 to USB Adapter	•	•	•	•	•	•	\$50.00
3134012936	RS232-to-9pin D Connector 4'11" / 1.5m (factory-fitted)	•				•		\$120.00
3004013214	Light Tower Kit w/ Relay Box	•						\$785.00
1100011297	Relay Box	•						\$190.00
600002028	AdamDU Data Collection Program	•	•	•	•	•	•	\$100.00
400005615	Labels - 800 per roll		•	•				\$15.00
3051410045	Wall Bracket				•	•	•	\$20.00

Accessories for Health & Fitness Scales and Weights

Part Number	Description	MTB	MDW	OIML Weights	List Price
700660290	Calibration Certificate	•	•		\$95.00
1120015779	ATP2 Thermal Printer		•		\$270.00
3126011263	ATP2 Paper		•		\$15.00
3126011281	ATP2 Paper (x10)		•		\$95.00
1120014641	AIP Impact Printer		•		\$345.00
3126014659	AIP Paper		•		\$15.00
3126014660	AIP Paper (x10)		•		\$100.00
3014011014	RS-232 Cable M-F — 1.8m		•		\$35.00
3074010507	RS-232 to USB Adapter		•		\$50.00
700200106	Calibration Weight Tweezer - Small			•	\$35.00
700200105	Calibration Weight Tweezer - Large			•	\$80.00

BMR Baby Measuring Rod

700200104 **\$200.00**




The BMR measures the length of infants and young children while they are lying down. The device features a compact design and accommodates heights up to 39" / 100cm.

- Lightweight, constructed of sturdy aluminum and folds for convenient storage
- Measures the length of infants and young children who cannot stand unassisted



Adam's AVT allows balances to perform with precision despite air currents and vibrations. The balance fits in the middle of the AVT's granite surface, stabilizing the base and enabling greater precision. All the necessary tools are supplied for easy assembly.

- Ample 31.5" x 23.6" / 800 x 600mm laminated work surface
- Two-table construction reduces interference with the scratch resistant 15.7" x 17.7" / 400 x 450mm granite slab
- Lightweight tubular aluminum frame

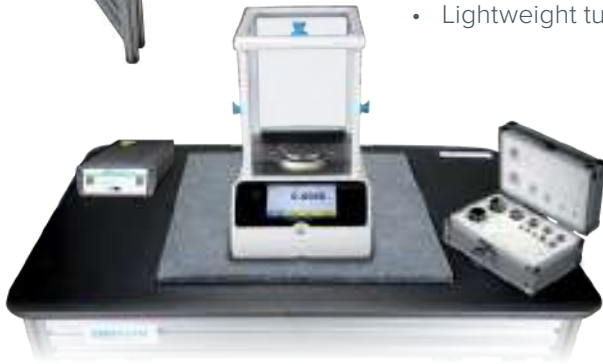

Adam Connect **NEW!**

Adam Connect is a simple plug-in solution for wireless connectivity to PCs and printers. Simply plug in the Sender and Receiver, and wirelessly transmit weight data and more across a distance of up to 35 feet. For PCs, use with AdamDU Data Collection Program.

Adam Connect works with any scale or balance in this catalog that has the green **Adam Connect Compatible** symbol.



- Plug-and-play solution for wireless data communication
- Requires a sender (connects to RS-232 on the scale or balance) and a receiver (connects to Adam ATP2 Thermal Printer or the USB port on your PC)
- Send and then save, print or share your weight data anywhere in the world!

- BTM-01 — Bluetooth Sender 8000011571 **\$179.00**
- BTM-02 — Bluetooth-to-Printer Receiver 8000011587 **\$169.00**
- BTM-03 — Bluetooth-to-PC Receiver 8000011572 **\$179.00**



Find all accessories here



A general purpose thermal roll printer, the ATP2 is ideal for use with most balances and scales. Efficient and compact, the printer occupies minimal space on a bench or tabletop.

- 2.3" / 58mm paper width
- Dimensions: 4.4"x7.4"x3.5" / 114x184x90mm

- ATP2 Paper3126011263 **\$15.00**
- ATP2 Paper (x10).....3126011281 **\$95.00**



Durable and versatile, the AIP is a compact, high-speed dot matrix printer. Set-up software included with the printer is compatible with Windows operating systems.

- 8 pin, 5x7 shuttle impact dot matrix, 24 or 40 digits per line
- 2.2" / 57mm width, 2" / 50mm in diameter

- AIP Paper3126014659 **\$15.00**
- AIP Paper (x10).....3126014660 **\$100.00**



AdamDU quickly collects information from up to eight Adam balances simultaneously, via RS-232 or USB connections.

- Include date and time with readings, and graph readings in real time
- Export readings in text, CSV, HTML or XML format, directly to Microsoft® Excel or Word



The Adam ionizer neutralizes the static charge that accumulates in non-conductive materials such as plastic, glass, ceramics, paper and textiles.


- Discharge time: 9s/5cm, 13s/10cm, 100s/40cm (with fan on)
- Standard distance from sample to ion source ~5-40cm
- Ozone concentration is 0-0.05ppm 2cm from ion source
- Maximum air volume 0.06cm³/min

Density Determination Kits



These kits allow for you to determine density with your Equinox, Solis and Luna analytical or precision balance.

- Equinox/Solis Density Kit1060014262 **\$385.00**
- Luna Density Kit1060015357 **\$375.00**

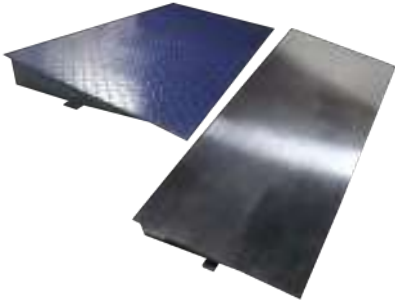

Mild steel and stainless steel ramps are great accessories for Adam platform scales, ensuring strength and durability. Securely connects to PT or PT-S platforms for easier, safer operation.

- PT Mild Steel 39.4" / 1000mm Ramp.....700100199 **\$335.00**
- PT Mild Steel 47.2" / 1200mm Ramp700100200 **\$335.00**
- PT Mild Steel 59" / 1500mm Ramp700100201 **\$335.00**
- PT-S Stainless Steel 39.4" / 1000mm Ramp700100202 **\$425.00**
- PT-S Stainless Steel 47.2" / 1200mm Ramp700100203 **\$425.00**
- PT-S Stainless Steel 59" / 1500mm Ramp.....700100204 **\$425.00**

Hard Carrying Case



Carry cases allow scales to be protected during transportation. The hard shell case is durable and comes with a lock so that you can secure the scale in the case as needed.

- Case for *Highland* HCB / *Core* CQT.....308002042 **\$75.00**
- Case for *Latitude* LBX3002014371 **\$95.00**
- Case for *Cruiser* CKT/CCT/CDT302013912 **\$90.00**
- Case for TBB700100211 **\$65.00**
- Case for CPWplus Standard700100099 **\$90.00**

Temperature Calibration Kit

1070010636 **\$260.00**



This temperature calibration kit for the PMB Moisture Analyzer can be used to help calibrate the temperature sensor. The kit comes with a case and a device to hold the sensor in the optimum position.

Large and Small Scoops



These stainless steel scoops are removable and easily washable. These durable items are ideal for food production.

- Large Scoop (with fitting to scale).....303149759 **\$120.00**
- Small Scoop (with fitting to scale)303149760 **\$120.00**



Find all accessories here



The light tower kit with relay box is compatible with AGB, AGF, Gladiator and AE 403 indicator. Checkweighing limits trigger a voltage relay and activate the tower lights to quickly show users if a weight is under, over or within limits.

- 3.5" / 89mm-high pole and 6' / 1.82m of cord included
- Green, orange and red lights indicate if the weight or count is over, under or within range

• Relay box 1100011297 **\$190.00**

Roller Decks



Made from galvanized steel, roller decks easily fit on top of Adam Equipment platforms. Built-in ball bearings allow parcels to be easily moved across them in any direction to accommodate front-to-back or side-to-side loading.

- Roller deck (15.7" x 11.8" / 400x300mm)..... 1140013826 **\$285.00**
- Roller deck (19.7" x 15.7" / 500x400mm) 1140013827 **\$385.00**
- Roller deck (31.5" x 23.6" / 800x600mm) 1140013828 **\$695.00**

Indicator Stand

2050013351

\$180.00



To stabilize a freestanding indicator that is separated from a scale, attach it to the indicator stand for reliable support. Sturdy aluminum construction is also lightweight, so the stand is easy to transport.

Weigh-Below Hook



Weigh-below hooks for selected Adam scales and balances allow you to perform below balance weighing. Ideal for materials testing applications.

- Weigh-below Hook for *Solis*, *Luna* & *TBB* balances 3021210953 **\$25.00**
- Weigh-below Hook for *Nimbus* NBL balances 302126013 **\$25.00**
- Weigh-below Hook for *Cruiser* CKT scales (factory-fit only)..... 202000001 **\$130.00**

Calibration Certificate



A Calibration Certificate provides information about the machine's performance and accuracy, and is a requirement of ISO Quality Systems. Note: Calibration Certificates must always be ordered with the scale or balance.

- Calibration Certificate 700660290 **\$95.00**
- Calibration Certificate for PT, AELP, PTSplus, PTT ranges 700660289 **\$160.00**
- Calibration Certificate for SHS/LHS/IHS/PTM/
GFK-S 600/GFK-Plus 600/AGF 1320a/BKT 1320a 700660288 **\$140.00**

Model	Shipping Dimensions (WxDxH)	Shipping Weight
Equinox EAB 124e, 124i, 224e, 224i, 314e	21" x 21" x 15.4" / 530 x 530 x 390mm	18lb / 8kg
Equinox EAB 125i, 225i, 314i	21" x 21" x 15.4" / 530 x 530 x 390mm	19lb / 8.5kg
Equinox EAB 414i, 514i	21" x 21" x 15.4" / 530 x 530 x 390mm	20lb / 9kg
Equinox EPB 363e, 723e	16.5" x 21" x 15.4" / 420 x 530 x 390mm	13lb / 6kg
Equinox EPB 363i, 723i	16.5" x 21" x 15.4" / 420 x 530 x 390mm	14lb / 6.5kg
Equinox EPB 1203i, 2103i	16.5" x 21" x 15.4" / 420 x 530 x 390mm	17lb / 7.5kg
Equinox ETB 3202e, 6202e, 8202e	11.8" x 21" x 15.4" / 300 x 530 x 390mm	12lb / 5.5kg
Equinox ETB 3202i	11.8" x 21" x 15.4" / 300 x 530 x 390mm	13lb / 6kg
Equinox ETB 6202i	11.8" x 21" x 15.4" / 300 x 530 x 390mm	13lb / 6kg
Solis SAB 125i, 225i, 124e, 124i, 224e, 314e	21" x 21" x 15.4" / 530 x 530 x 390mm	18lb / 8kg
Solis SAB 224i, 314i, 414i, 514i	21" x 21" x 15.4" / 530 x 530 x 390mm	19lb / 8.5kg
Solis SPB 1203i, 2103i	16.5" x 21" x 16.5" / 420 x 530 x 420mm	17lb / 7.5kg
Solis STB 3202e	15.4" x 21" x 11.8" / 390 x 530 x 300mm	12lb / 5.5kg
Solis STB 8202e	15.4" x 21" x 11.8" / 390 x 530 x 300mm	16lb / 7kg
Solis STB 6202i	15.4" x 21" x 11.8" / 390 x 530 x 300mm	18lb / 8kg
Luna LAB 84e, 84i, 124e, 214e, 214i, 254e	21" x 21" x 15.4" / 530 x 530 x 390mm	18lb / 8kg
Luna LAB 124i, 254i	21" x 21" x 15.4" / 530 x 530 x 390mm	19lb / 8.5kg
Luna LPB 223e, 423e	16.5" x 21" x 16.5" / 420 x 530 x 420mm	13lb / 6kg
Luna LPB 223i, 423i	16.5" x 21" x 16.5" / 420 x 530 x 420mm	14lb / 6.5kg
Luna LPB 823e	16.5" x 21" x 16.5" / 420 x 530 x 420mm	16lb / 7kg
Luna LPB 623e, 623i, 823i	16.5" x 21" x 16.5" / 420 x 530 x 420mm	17lb / 7.5kg
Luna LTB 2602e, 3602e, 4602e, 6002e	16.5" x 21" x 15.4" / 420 x 530 x 390mm	11lb / 5kg
Luna LTB 2602i	16.5" x 21" x 15.4" / 420 x 530 x 390mm	13lb / 6kg
Luna LTB 3602i, 4602i, 6002i	16.5" x 21" x 15.4" / 420 x 530 x 390mm	14lb / 6.5kg
Luna LBB 6001e, 8001e	16.5" x 21" x 15.4" / 420 x 530 x 390mm	11lb / 5kg
Luna LBB 12001e, 15001e	16.5" x 21" x 15.4" / 420 x 530 x 390mm	12lb / 5.5kg
Luna LBLE	20.5" x 18.3" x 6.2" / 520 x 465 x 158mm	21lb / 9.5kg
Luna LBLp	25.4" x 18.3" x 6.3" / 645 x 466 x 160mm	24lb / 11kg
Nimbus NBLe	18" x 20" x 8" / 457 x 508 x 203mm	20lb / 9kg
Nimbus NBLp	18" x 20" x 8" / 457 x 508 x 203mm	22lb / 10kg
Core CQT	6" x 14" x 11" / 152 x 356 x 279mm	4lb / 1.7kg
Highland HCB	6" x 14" x 11" / 152 x 356 x 279mm	7lb / 3kg
CBX	7.5" x 12.2" x 3.7" / 190 x 310 x 95mm	3lb / 1.1kg
CB	8" x 9" x 3" / 203 x 229 x 76mm	1lb / 0.6kg
DCT	8" x 12" x 4" / 203 x 305 x 102mm	2lb / 0.7kg
TBB	7" x 23" x 9" / 178 x 584 x 229mm	9lb / 4kg



Model	Shipping Dimensions (WxDxH)	Shipping Weight
PMB	15" x 18" x 12" / 381 x 457 x 305mm	18lb / 8kg
Latitude LBX	11.6" x 3.8" x 7" / 295 x 350 x 175mm	8lb / 3.5kg
Cruiser CKT	7.5" x 14.6" x 16.5" / 190 x 370 x 420mm	12lb / 5.5kg
CPWplus	4" x 19" x 12" / 102 x 483 x 381mm	12lb / 5.5kg
CPWplus P	14" x 20" x 16" / 356 x 508 x 406mm	14lb / 6.5kg
CPWplus M	5" x 23" x 22" / 127 x 584 x 559mm	21lb / 9.5kg
CPWplus W	5" x 41" x 22" / 127 x 1041 x 559mm	27lb / 12kg
CPWplus L	4" x 43" x 26" / 102 x 1092 x 660mm	33lb / 15kg
GBK-S / GBK-Plus	30.7" x 15.7" x 6.3" / 780 x 400 x 160mm	27lb / 12kg
GFK-S / GFK-Plus	18" x 35" x 8.3" / 460 x 895 x 210mm	35lb / 16kg
GFK-S / GFK-Plus 1320a	26" x 46" x 8" / 660 x 1168 x 203mm	77lb / 35kg
AGB	30.7" x 15.7" x 6.3" / 780 x 400 x 160mm	27lb / 12kg
AGF	8" x 34.3" x 18.7" / 205 x 870 x 476mm	40lb / 18kg
AGF 1320a	8.3" x 50.6" x 26" / 210 x 1286 x 661mm	80lb / 36kg
BKT 130a	16.7" x 31.7" x 6.7" / 425 x 805 x 170mm	27lb / 12kg
BKT 16a, 35a, 65a, 260a	16.7" x 31.7" x 6.7" / 425 x 805 x 170mm	29lb / 13kg
BKT 165a, 165aH, 330aH, 330a, 660a	8" x 34.3" x 18.7" / 205 x 870 x 476mm	40lb / 18kg
BKT 1320a	8.3" x 50.6" x 26" / 210 x 1286 x 661mm	80lb / 36kg
BTT Bench Scale	16.7" x 31.7" x 6.7" / 425 x 805 x 170mm	31lb / 14kg
BTT Floor Scale	8" x 34.3" x 18.7" / 205 x 870 x 476mm	40lb / 18kg
Cruiser CDT	16.5" x 14.6" x 7.5" / 420 x 370 x 190mm	12lb / 5.5kg
Cruiser CCT	16.5" x 14.6" x 7.5" / 420 x 370 x 190mm	12lb / 5.5kg
GBC	30.7" x 15.7" x 6.3" / 780 x 400 x 160mm	27lb / 12kg
GFC 75, 150	18" x 35" x 8.3" / 460 x 895 x 210mm	35lb / 16kg
GFC 300	18" x 35" x 8.3" / 460 x 895 x 210mm	38lb / 17kg
BCT 16, 32, 60, 75	16.7" x 31.7" x 6.7" / 425 x 805 x 170mm	27lb / 12kg
BCT 150, 300	18.7" x 34" x 8" / 476 x 870 x 203mm	40lb / 18kg
Aqua ABW 4, 8, 16	11.6" x 13.8" x 6.8" / 295 x 350 x 175mm	8lb / 3.5kg
Aqua ABW 32	11.6" x 13.8" x 6.8" / 295 x 350 x 175mm	9lb / 4kg
Aqua ABW 4S, 8S, 16S	11.6" x 13.8" x 6.8" / 295 x 350 x 175mm	9lb / 4kg
Aqua ABW 32S	11.6" x 13.8" x 6.8" / 295 x 350 x 175mm	19lb / 4.5kg
Gladiator GGS	12" x 24.4" x 7" / 310 x 620 x 180mm	20lb / 9kg
Gladiator GGB	13.8" x 30" x 8" / 350 x 750 x 203mm	29lb / 13kg
Gladiator GGF	20" x 34.6" x 8.3" / 510 x 880 x 210mm	38lb / 17kg
Gladiator GGL	20" x 34.6" x 8.3" / 510 x 880 x 210mm	53lb / 24kg
Swift SWZD	11" x 14.2" x 8.6" / 280 x 360 x 220mm	12lb / 5.5kg

98 Product Shipping Dimensions (cont.)

Model	Shipping Dimensions (WxDxH)	Shipping Weight
Swift SWZDP	11" x 14.2" x 8.6" / 280 x 360 x 220mm	13lb / 6kg
AELP	16.5" x 14.6" x 7.5" / 420 x 370 x 190mm	81lb / 36.5kg
PTSplus	67" x 30" x 27" / 1702 x 762 x 868mm	330lb / 150kg
PTT	67" x 30" x 27" / 1702 x 762 x 868mm	330lb / 150kg
SHS	30" x 67" x 27" / 762 x 1702 x 686mm	4lb / 1.6kg
LHS	30" x 67" x 27" / 762 x 1702 x 686mm	14lb / 6.5kg
IHS 1	8.3" x 12.6" x 5" / 210 x 320 x 130mm	29lb / 13kg
IHS 3	14" x 18" x 7" / 356 x 457 x 178mm	33lb / 15kg
IHS 5	16" x 19" x 11" / 406 x 483 x 279mm	44lb / 20kg
IHS 10	16" x 19" x 11" / 406 x 483 x 279mm	75lb / 34kg
PT 110	41" x 41" x 10" / 1041 x 1041 x 254mm	205lb / 93kg
PT 112	48" x 48" x 10" / 1219 x 1219 x 254mm	262lb / 119kg
PT 115	61" x 61" x 10" / 1549 x 1549 x 254mm	355lb / 161kg
PT 310	41" x 41" x 10" / 1041 x 1041 x 254mm	214lb / 97kg
PT 312	48" x 48" x 10" / 1219 x 1219 x 254mm	271lb / 123kg
PT 315	61" x 61" x 10" / 1549 x 1549 x 254mm	386lb / 175kg
PTM	36" x 45" x 5" / 914 x 1143 x 127mm	124lb / 56kg
GB	15.7" x 30.5" x 6.3" / 400 x 775 x 160mm	20lb / 9kg
GF	19" x 35" x 7" / 483 x 889 x 178mm	33lb / 15kg
GF 600	26" x 46" x 7" / 660 x 1168 x 178mm	73lb / 33kg
WS	11.8" x 24" x 7.5" / 300 x 610 x 190mm	14lb / 6.5kg
WB	14" x 29" x 7.8" / 360 x 740 x 200mm	21lb / 9.5kg
WF	19.7" x 34.6" x 7.8" / 500 x 880 x 200mm	31lb / 14kg
WL	19.7" x 34.6" x 10" / 500 x 880 x 260mm	44lb / 20kg
AE 403 & AE 403M	9" x 11" x 6" / 229 x 279 x 152mm	9lb / 4kg
AE 503	11" x 14" x 8.7" / 280 x 360 x 220mm	9lb / 4kg
AE 504	11" x 14" x 8.7" / 280 x 360 x 220mm	9lb / 4kg
AE 505	11" x 14" x 8.7" / 280 x 360 x 220mm	9lb / 4kg
GC	9" x 11" x 9" / 229 x 279 x 229mm	7lb / 3kg
GK-S / GKaM	9" x 11" x 9" / 229 x 279 x 229mm	4lb / 1.9kg
GK-Plus	9" x 11" x 9" / 229 x 279 x 229mm	6lb / 2.5kg
MTB	15" x 24" x 7" / 381 x 610 x 178mm	10lb / 4.5kg
MDW	21" x 52" x 6" / 533 x 1321 x 152mm	35lb / 16kg
AVT	34.5" x 26.5" x 10.8" / 876 x 673 x 274mm	177lb / 80kg

NOTE: Shipping weights are rounded up to the nearest kg if the product weighs more than 10kg. Below 10kg, we have rounded up to the nearest 500g. Below 2kg, shipping weight is rounded up to the nearest 100g. For items shipped by pallet, 18kg has been added to shipping weight to account for the pallet (12kg for the AVT). For more details, please contact us.

Capacity Selection Guide..... 6-8

Analytical & Precision Balances.....9

Equinox Semi-Micro, Analytical and Precision Balances.....10-11

Solis Semi-Micro, Analytical and Precision Balances 12-13

Luna Analytical and Precision Balances14-15

Luna LBL Heavy Duty Precision Balances.....16-17

Nimbus® NBL Heavy Duty Precision Balances.....18-19

Compact Balances..... 20

Core® CQT Portable Compact Balances 21

Highland® HCB Portable Precision Balances22-23

CBX Compact Balances..... 24

CB Compact Balances..... 25

Dune® DCT Portable Compact Balances 26

TBB Triple-Beam Mechanical Balances 27

Moisture Balances 28

PMB Moisture Analyzer..... 29

Bench & Floor Scales 30

Latitude LBX Compact Bench Scales 31

Cruiser® CKT Bench Checkweighing Scales32-33

CPWplus Bench and Floor Scales 34-35

GBK & GFK S/Plus Checkweighing Bench and Floor Scales...36-37

AGB & AGF Bench and Floor Scales 38-39

BKT Label Printing Scales 40-41

NEW! **BTT** Touch-screen Label Printing Scales.....42-43

Counting Scales..... 44

Cruiser® CDT Dual Counting Scales..... 45

Cruiser® CCT Bench Counting Scales46-47

GBC & GFC Bench and Floor Counting Scales..... 48-49

BCT Label Printing Counting Scales 50-51

Waterproof & Washdown Scales..... 52

Aqua® ABW Washdown Scales 53

Aqua® ABW-S Washdown Scales 54-55

Gladiator® Washdown Scales..... 56-57

WBW Trade Approved Washdown Scales..... 58

WBZ Trade Approved Washdown Retail Scales 59

Retail Scales..... 60

Swift SWZ Price-Computing Retail Scales 61

Heavy-Duty & Platform Scales..... 62

AELP Pallet Beam Scales 63

PTSpplus Pallet Truck Scales..... 64

PTT Pallet Truck Scales..... 65

SHS, LHS & IHS Crane Scales 66

PTM Drum and Wheelchair Platform Scales..... 67

PT & PT-S Platform Scales 68-69

W Series Washdown Platform Scales 70

GB & GF Platform Scales.....71

Weighing Indicators72

AE 403 Washdown Indicators 73

AE 503 Label Printing Indicators74

AE 504 Label Printing Indicators..... 75

NEW! **AE 505** Touch-screen Label Printing Indicators 76

GC Counting Indicators.....77

GKaM Trade Approved Checkweighing Indicators..... 78

GK-S & GK-Plus Checkweighing Indicators 79

Health & Fitness Scales..... 80

MTB Digital Scales..... 81

MDW Physician Scales 82-83

Weights & Accessories 84

OIML Calibration Weights 85-87

Accessories 88-95

Product Shipping Dimensions..... 96-98

AEADAM[®]

SCALES & BALANCES

United States

1 Fox Hollow Road
Oxford, CT, 06478, USA
Phone: +1 (203) 790-4774
Email: sales@adamequipment.com

South Africa

7 Megawatt Road, Spartan EXT 22, Kempton Park
Johannesburg, Republic of South Africa
Phone: +27 (0)11 9749745
Email: sales@adamequipment.co.za

United Kingdom

Maidstone Road, Kingston
Milton Keynes MK10 0BD, UK
Phone: +44 (0)1908 274545
Email: sales@adamequipment.co.uk

Australia

70 Miguel Road, Bibra Lake 6163
Perth, WA, Australia
Phone: +61 (0) 8 6461 6236
Email: sales@adamequipment.com.au

Germany

Instenkamp 4
24242 Felde, Germany
Phone: +49- (0) 4340-40300-0
Email: vertrieb@aeadam.de

China

E Building, Private Industrial Park, Zhuanyang
Avenue, Wuhan Economic & Technological
Development Zone, 430056 Wuhan, P.R.China
Phone: + 86 (27) 59420391
Email: sales@adamequipment.com.cn



adamequipment.com

Nimbus[®], Core[®], Dune[®], Highland[®], Cruiser[®], Aqua[®], Gladiator[®], Swift[®], ShockProtect[®], HandiCal[®], Adam Equipment[®] and the Adam Equipment logo are registered trademarks of Adam Equipment and therefore, use of these trademarks in any way is granted only with the express written permission of Adam Equipment.

Adam Equipment follows a policy of continuous improvement and reserves the right to change specification and pricing without notice.
Adam Equipment's standard terms and conditions of sale apply. Errors and omissions excepted.

Microsoft Word, Microsoft Excel and Microsoft are registered trademarks of Microsoft Corporation in the United States and other countries.