


# 2025 MASTER SALES CATALOG AND PRICING

Effective 02/17/2025 Rev 1.0

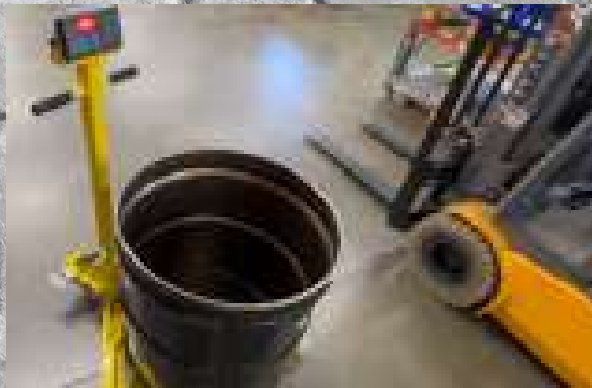

**PENNSYLVANIA**

SCALE COMPANY

[www.pascale.com](http://www.pascale.com)

2025 All Rights Reserved. Prices, Terms and specifications subject to change without notice. Not responsible for typographical errors

**FOR OVER A CENTURY, PENNSYLVANIA SCALE HAS REMAINED A LEADER FOR CUTTING-EDGE, PRECISE, AND DURABLE WEIGHING SOLUTIONS.**

## High Resolution Counting and Weighing Bench Scales

Pennsylvania Scale bench scales are built to deliver long performance life with a clean, rugged design and high-resolution accuracy.



## Powerful, Flexible, Accurate Weighing, Counting and Process Control Indicators

Scale indicators designed to provide easy setup and a clean, intuitive display that's packed with a host of features.

## Stainless Steel, IP66K/IP69K Washdown Bench Scales

Durable, Easy-to-Clean Solutions for Wet and Washdown Environments



## Industrial Grade Floor Scales and Bases

Dry Industrial and light washdown systems. Up to 40,000 lbs. capacity and 8' X 12' dimensions.

## Drum and Barrel Weighing Systems

Mobile and static systems available in Stainless Steel Washdown, Powder Coated Steel and FM/IS configurations



**PENNSYLVANIA SCALE OFFERS THE PERFECT SOLUTION FOR ANY SCALE APPLICATION, FROM HANDLING GRAMS TO TONS, COUNTING THE SMALLEST PARTS TO WEIGHING ITEMS EXCEEDING 40,000 POUNDS.**





### CONTACT US

Sales and customer service support  
800 233 0473 or 717 295 6935  
[sales@pascale.com](mailto:sales@pascale.com)

Service and Technical support  
800 233 0473 or 717 295 6935  
[Techsupport@pascale.com](mailto:Techsupport@pascale.com)

Offices and Manufacturing Address  
Pennsylvania Scale Company  
665 North Reservoir Street  
Lancaster PA 17602

### Direct Support Links Scan or Click on the QR Code:



[www.pascale.com](http://www.pascale.com)



Parts List & Pricing



Sales Team Contact



Tech Team Contact

### Social Media Links Scan or click on the QR Code:



CONTENTS	PAGE
<b>Count/Weigh Scales</b>	
7800HR Touch Screen Series	4 - 6
7600HR Series	7-9
7500HR Series	10 – 12
<b>Bench Scales</b>	
7300HR Series	13 – 15
7000HR Series	16 – 17
<b>Washdown Bench Scales</b>	
SS6500 Base	18 – 19
SS7800MAX IP69K Scale	20 – 22
SS6574 & SS6576 Scales	23 – 26
<b>Washdown Indicators</b>	
7800 MAX IP69K Indicator	27 – 28
7400 WD and 7600/4 WD Indicator	29 – 31
<b>Indicators</b>	
7800 Touch Screen Indicator	32 – 33
7500/4 & 7600/4 Indicator	34 – 36
7400 & 7600E Indicator	37 – 38
7400, 7500 & 7600 EXP Indicator	39
<b>Bases and Floor Scales</b>	
M6400 & SS6400	40 – 43
SS6600 MAX-LT	44 – 45
M6600 & SS6600	46 – 54
U6600 Bulk Container	55 – 56
<b>Barrel &amp; Drum Scales</b>	
M6300 & SS6300 Drum Bunny	57 – 58
M6900/6950 & SS6900/6950	59 – 60
<b>Airline Baggage Scales</b>	
MDL64 & MDL66	61 – 64
<b>Scale Options</b>	
Counting Scale ROI	65
Remote Displays	66
Ethernet IP Application Guide	67 – 68
Counting Scale Application Guide	69 – 71
Printer Application Guide	72 – 74
Communications Application Guide	75 – 77
Load Cell Simulators	78
6400 Base Stand	79
Roller Conveyor Option	80 – 81
Stack Alarm Light Option	82
Terms and Conditions	83 – 84

# 7800HR SERIES HIGH RESOLUTION TOUCHSCREEN COUNT WEIGH SCALES

## Standard Features

- High Resolution Counting and Weighing 20,000 Divisions
- Heavy-duty powder coated steel and SS construction
- Clean, convenient design with bright, stable full-color display and touchscreen
- Full alpha-numeric QWERTY keyboard for easy entry of scale data points
- Check weighing and Setpoint relay operation
- SKU/Product ID Database to store and recall by alphanumeric Part#, Description, Piece Weight, Tare Weight, 3 user-defined Fields, Over/Under Check weigh Settings, Setpoint/Relay Target settings
- Four units of measurement, including lb., kg, g, oz t, lb. t, gr, dwt, oz, c, oz f, l, ml, tons and lb. - oz
- Single or optional dual base-counting and weighing
- Multiple count modes and Auto Sample Update and percent-of-error/accuracy display
- Fast one-step or two-step counting
- Two powerful and flexible standard serial ports, optional wired ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth
- Four-year limited warranty

## Specifications:

- Power AC line voltages 115/230 VAC, 50/60 Hz (Specify when ordering)
- Power Consumption 0.25A at 115 VAC, 0.13A at 230 VAC
- Circuit Protection RFI, EMI, ESD Protection ADC shielded
- Display: 800 X 320 dot resolution, and 4.6" full-color LCD display with resistive touch panel
- Indications for Gross, Net, Tare, Count, Piece Weight, % Accuracy, Check Weigh Over/Under/Accept, Setpoint Status, Active ID and Base 2
- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Internal Resolution 1/8,000,000
- Displayed Resolution. Standard 1/20,000. Up to 1/50,000
- 5 VDC excitation to power up to 12, 350 ohm load cells
- Dimensions 8" X 8" or 12" X 14" Platter Size
- Four Year Limited Warranty
- Shipping Information: 23" X 21" X 7" Carton 19 lbs. Battery Option 23 lbs.



## Options:

- **New! Ethernet IP**
- Second base input
- Battery AC operation, built-in re-chargeable system, 30+ hours of operation
- Printers for label, barcode label or receipt printing
- Barcode scanner
- Upgraded Internal Product DB, 1500 and 3000 entries
- External power input 12 or 24 VDC.
- 1 alarm buzzer mounted inside scale or indicator
- Ball-top transfer plate and roller conveyor
- Setpoint/relays DC or AC
- Alarm stack lights and buzzer
- Communications Wired Ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth®
- Analog output, 4-20ma or 0-10vdc
- Custom engineering for unique applications

Scan or Click the QR Codes for detailed product information

### 7800HR Product Video



### 7800HR Web Page



### 7800HR Product Literature



# 7800HR SERIES HIGH RESOLUTION TOUCHSCREEN COUNT WEIGH SCALES

<b>7800 Count Weigh Touchscreen Scale</b>				
Part Number	Capacity/Resolution	Platform Size	List Price	Price Code
<b>7800-2HR</b>	2 X 0.0002 lbs. / 907.2 X 0.1 g	8" X 8"	\$1,595	B
<b>7800-5HR</b>	5 X 0.0005 lbs. / 2268 X 0.5 g	8" X 8"	\$1,595	B
<b>7800-10HR</b>	10 X 0.0005 lbs. / 4536 X .2 g	12" X 14"	\$1,595	B
<b>7800-20HR</b>	20 X 0.001 / 9.072 X 0.005 kg	12" X 14"	\$1,595	B
<b>7800-50HR</b>	50 X 0.002 lbs. / 22.68 X 0.001 kg	12" X 14"	\$1,595	B
<b>7800-100HR</b>	100 X 0.005 / 45.36 X 0.002 kg	12" X 14"	\$1,595	B
<b>7800-150HR</b>	150 X 0.01 lbs. / 68.04 X 0.005 kg	12" X 14"	\$1,595	B
<b>7800-200HR</b>	200 X 0.02 lbs. / 90.72 X 0.005 kg	12" X 14"	\$1,595	B
<b>Factory Calibration N/C</b>				
<b>Options - Note "XXX" = capacity</b>				
Part Number	Description	List Price	Price Code	
<b>7800-XXXHR AB</b>	1 Alarm Buzzer Mounted inside scale or indicator	<b>\$1,990</b>	B	
<b>7800-XXXHR AO</b>	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	<b>\$1,945</b>	B	
<b>7800-XXXHR BC</b>	Heavy duty industrial barcode scanner. Power supplied from scale with convenient bulkhead quick disconnect	<b>\$2,010</b>	B	
<b>7800-XXXHR BT</b>	Ball top transfer plate option for scale with 12" X 14" ball top transfer plate. 18, 1.5" balls with 3.5" center to center spacing. Available in 50 lbs. capacity and higher only.	<b>\$1,945</b>	B	
<b>7800-XXXHR BTH</b>	Blue tooth option. Internal blue tooth transmitter/receiver for com port communication.	<b>\$1,895</b>	B	
<b>7800-XXXHR DB</b>	2nd Base Input – for dual base or sample/bulk counting applications	<b>\$1,790</b>	B	
<b>7800-XXXHR DC</b>	Built in rechargeable battery option. 30+ hours of continuous operation with integrated battery charger and heavy-duty power cord.	<b>\$1,800</b>	B	
<b>7800-XXXHR DCR</b>	Four VDC, 2-amp Setpoint/Relays and I/O that may be programmed for use with Count or Weight values. Up to 32 VDC at 1 Amp	<b>\$1,840</b>	B	
<b>7800-XXXHR EIP</b>	EtherNet/IP Communication option. Wired, fully configurable and programable with bulkhead RJ45 connector	<b>\$2,195</b>	B	
<b>7800-XXXHR EO</b>	Wired ethernet option. Wired ethernet communication port, fully networked configurable with bulkhead RJ45 connector. Includes software utility for setup and configuration	<b>\$1,945</b>	B	
<b>7800-XXXHR HID</b>	Human interface device USB Option. Provides keyboard emulation USB port with USB "A" bulkhead connector	<b>\$1,895</b>	B	
<b>7800-XXXHR RT</b>	Roller conveyor option for scale with 12" X 14" roller conveyor option. High strength lightweight roller conveyors, 1.25" diameter rollers, 1.5" center to center spacing Available in 50 lbs. capacity and higher	<b>\$1,945</b>	B	

# 7800HR SERIES HIGH RESOLUTION TOUCHSCREEN COUNT WEIGH SCALES

Options - Note "XXX" = capacity			
Part Number	Description	List Price	Price Code
<b>7800-XXXHR SLA1</b>	Alarm Stack light 1 Lights, Red and Buzzer Alarm. 2" Diameter, 16" High.	<b>\$2,050</b>	B
<b>7800-XXXHR SLA2</b>	Alarm Stack light 2 Lights, Red, Green and Buzzer Alarm. 2" Diameter, 18.75" High.	<b>\$2,100</b>	B
<b>7800-XXXHR SLA3</b>	Alarm Stack light 3 Lights, Red, Green, Yellow and Buzzer Alarm. 2" Dia. 21" High.	<b>\$2,150</b>	B
<b>7800-XXXHR SSR</b>	Four 120 VAC, 2-amp Setpoint/Relays and I/O that may be programmed for use with Count or Weight values. Up to 250 VAC at 1 Amp	<b>\$1,840</b>	B
<b>7800-XXXHR USB</b>	USB option. Provides USB comport communications with USB "A" bulkhead connector	<b>\$1,895</b>	B
<b>7800-XXXHR WIFI</b>	Wi-Fi option. Wireless ethernet communication with bulkhead mounted antenna, fully networked configurable. Includes software utility for setup and configuration	<b>\$1,995</b>	B
<b>CUSTLABEL</b>	Custom Label Programming. Design and set up of custom label for a plug and play system. See custom label worksheet on page 72 - 74	<b>\$195</b>	C
<b>DT2PRINTER-2</b>	2" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above	<b>\$495</b>	C
<b>DT4PRINTER-2</b>	4" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above	<b>\$525</b>	C
<b>DTR2PRINTER-2</b>	2" Direct thermal receipt printer. Includes 6' scale to printer cable.	<b>\$295</b>	C
<b>PSCRD2.4</b>	Mini Remote Display with 2.4" LED Digits. Display Count or Weight. Includes 10' of serial interface cable	<b>\$695</b>	C
<b>PSCRD4.7</b>	Remote Display with Visor with 4.7 LED Digits. Display weight with GROSS/NET/TARE Indicators	<b>\$1,250</b>	C
<b>57513-1</b>	Replacement battery pack	<b>\$95</b>	C
<b>61510</b>	10" Plastic Scoop. 10" x 2-3/4" footed round plastic scoop ideal for parts counting or weighing ingredients or components. It is made of food grade polypropylene and is manufactured in the USA.	<b>\$30</b>	C
<b>CALCERT1</b>	Statement of Accuracy Certificate	<b>\$20</b>	C
<b>CALCERT2</b>	NIST Traceable Calibration Certificate	<b>\$85</b>	C
<b>Specials</b>	Special Applications are available for this model. Contact us to discuss your unique application requirements so we can develop any custom solution	<b>Contact Factory</b>	



# 7600HR HIGH RESOLUTION COUNT WEIGH SCALES

## Standard Features

- High Resolution Counting and Weighing 20,000 Divisions
- Heavy-duty powder coated steel and SS construction
- Clean, convenient design with bright, Red LED display
- Full functions with Sample, Zero, Tare, Keypad Tare, Gross/Net, Piece Weight, Print, Base and Units
- Two units of measurement, including lb., kg, g, oz t, lb. t, gr, dwt, oz, c, oz f, l, ml, tons and lb. - oz
- Single or optional dual base-counting and weighing
- Multiple count modes and Auto Sample Update and percent-of error/accuracy display
- Fast one-step or two-step counting
- One powerful and flexible standard serial ports, optional wired ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth
- Four-year limited warranty

## Specifications:

- Power AC line voltages 115/230 VAC, 50/60 Hz (Specify when ordering)
- Power Consumption 0.25A at 115 VAC, 0.13A at 230 VAC
- Circuit Protection RFI, EMI, ESD Protection ADC shielded
- Display: .56 LED Red, bright, stable and easy to read
- Indications for Gross, Net, Tare, Count, Piece Weight, % Accuracy, and Base 2
- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Internal Resolution 1/8,000,000
- Displayed Resolution. Standard 1/20,000. Up to 1/50,000
- 5 VDC excitation to power up to 12, 350-ohm load cells
- Dimensions 8" X 8" or 12" X 14" Platter
- Warranty 4 Year Limited Warranty
- Legal for trade NTEP COC 91-149A7
- Measurement Canada COC AM-4869 Rev. 3
- Shipping Information: 23" X 21" X 7" Carton 19 lbs. Battery Option 23 lbs.



## Options:

- Second base input
- Battery AC operation, built-in re-chargeable system, 30+ hours of operation
- Printers for label, barcode label or receipt printing
- External power input 12 or 24 VDC.
- 220/230 VAC operation
- 1 alarm buzzer mounted inside scale or indicator
- Ball-top transfer plate and roller conveyor
- Setpoint/relays DC or AC
- Alarm stack lights and buzzer
- Communications Wired Ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth®
- Analog output, 4-20ma or 0-10vdc
- Custom engineering for unique applications



Scan or Click the QR Codes for detailed product information

[7600HR Web Page](#)



[7600HR Product Literature](#)



[7600HR Product Literature](#)



# 7600HR HIGH RESOLUTION COUNT WEIGH SCALES

7600 Count Weigh Scale				
Part Number	Description	Platform Size	List Price	Price Code
<b>7600-2HR</b>	2 X 0.0002 lbs. / 907.2 X 0.1 g	8" X 8"	<b>\$1,275</b>	A/B
<b>7600-5HR</b>	5 X 0.0005 lbs. / 2268 X 0.5 g	8" X 8"	<b>\$1,275</b>	A/B
<b>7600-10HR</b>	10 X 0.0005 lbs. / 4536 X .2 g	12" X 14"	<b>\$1,275</b>	A/B
<b>7600-20HR</b>	20 X 0.001 / 9.072 X 0.005 kg	12" X 14"	<b>\$1,275</b>	A/B
<b>7600-50HR</b>	50 X 0.002 lbs. / 22.68 X 0.001 kg	12" X 14"	<b>\$1,275</b>	A/B
<b>7600-100HR</b>	100 X 0.005 / 45.36 X 0.002 kg	12" X 14"	<b>\$1,275</b>	A/B
<b>7600-150HR</b>	150 X 0.01 lbs. / 68.04 X 0.005 kg	12" X 14"	<b>\$1,275</b>	A/B
<b>7600-200HR</b>	200 X 0.02 lbs. / 90.72 X 0.005 kg	12" X 14"	<b>\$1,275</b>	A/B
<b>Factory Calibration N/C</b>				
<b>Options - Note "XXX" = capacity</b>				
Part Number	Description	List Price	Price Code	
<b>7600-XXXHR 12DC</b>	External power input 12 or 24 VDC. Specify at time of order, requires external power supply of 12 or 24 VDC	<b>\$1,275</b>		B
<b>7600-XXXHR 220VAC</b>	220/230 VAC Operation	<b>\$1,275</b>		B
<b>7600-XXXHR AB</b>	1 Alarm Buzzer Mounted inside scale or indicator	<b>\$1,525</b>		B
<b>7600-XXXHR AO</b>	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	<b>\$1,625</b>		B
<b>7600-XXXHR BT</b>	Ball top transfer plate option for scale with 12" X 14" ball top transfer plate. 18, 1.5" balls with 3.5" center to center spacing. Available in 50 lbs. capacity and higher only.	<b>\$1,625</b>		B
<b>7600-XXXHR BTH</b>	Blue tooth option. Internal blue tooth transmitter/receiver for com port communication.	<b>\$1,575</b>		B
<b>7600-XXXHR DB</b>	2nd Base Input – for dual base or sample/bulk counting applications	<b>\$1,470</b>		B
<b>7600-XXXHR DC</b>	Built in rechargeable battery option. 30+ hours of continuous operation with integrated battery charger and heavy-duty power cord.	<b>\$1,485</b>		B
<b>7600-XXXHR DCR</b>	Four VDC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 32 VDC at 1 Amp	<b>\$1,525</b>		B
<b>7600-XXXHR EO</b>	Wired ethernet option. Wired ethernet communication port, fully networked configurable with bulkhead RJ45 connector. Includes software utility for setup and configuration	<b>\$1,625</b>		B
<b>7600-XXXHR HID</b>	Human interface device USB Option. Provides keyboard emulation USB port with USB "A" bulkhead connector	<b>\$1,575</b>		B
<b>7600-XXXHR RS</b>	Remote switch input option. Provides remote switch function for Gross/Net, Tare, Zero and Print. Includes 18" color coded cable	<b>\$1,400</b>		B
<b>7600-XXXHR RT</b>	Roller conveyor option for scale with 12" X 14" roller conveyor option. High strength lightweight roller conveyors, 1.25" diameter rollers, 1.5" center to center spacing Available in 50 lbs. capacity and higher only.	<b>\$1,625</b>		B
<b>7600-XXXHR SLA1</b>	Alarm Stack light 1 Lights, Red and Buzzer Alarm. 2" Diameter, 16" High.	<b>\$1,735</b>		B
<b>7600-XXXHR SLA2</b>	Alarm Stack light 2 Lights, Red, Green and Buzzer Alarm. 2" Diameter, 18.75" High.	<b>\$1,785</b>		B



# 7600HR HIGH RESOLUTION COUNT WEIGH SCALES

Options - Note "XXX" = capacity			
Part Number	Description	List Price	Price Code
<b>7600-XXXHR SLA3</b>	Alarm Stack light 3 Lights, Red, Green, Yellow and Buzzer Alarm. 2" Dia. 21" High.	<b>\$1,835</b>	B
<b>7600-XXXHR SSR</b>	Four 120 VAC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 250 VAC at 1 Amp	<b>\$1,525</b>	B
<b>7600-XXXHR USB</b>	USB option. Provides USB comport communications with USB "A" bulkhead connector	<b>\$1,575</b>	B
<b>7600-XXXHR WIFI</b>	Wi-Fi option. Wireless ethernet communication with bulkhead mounted antenna, fully networked configurable. Includes software utility for setup and configuration	<b>\$1,675</b>	B
<b>CUSTLABEL</b>	Custom Label Programming. Design & Setup of custom label for a plug and play. See custom label worksheet on page 72 – 74	<b>\$195</b>	C
<b>DT2PRINTER-2</b>	2" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above	<b>\$495</b>	C
<b>DT4PRINTER-2</b>	4" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above	<b>\$525</b>	C
<b>DTR2PRINTER-2</b>	2" Direct thermal receipt printer. Includes 6' scale to printer cable.	<b>\$295</b>	C
<b>PSCRD2.4</b>	Mini Remote Display with 2.4" LED Digits. Display Count or Weight. Includes 10' of serial interface cable	<b>\$695</b>	C
<b>PSCRD4.7</b>	Remote Display with Visor with 4.7 LED Digits. Display weight with GROSS/NET/TARE Indicators	<b>\$1,250</b>	C
<b>57513-1</b>	Replacement battery pack	<b>\$95</b>	C
<b>61510</b>	10" Plastic Scoop. 10" x 2-3/4" footed round plastic scoop ideal for parts counting or weighing ingredients or components. It is made of food grade polypropylene and is manufactured in the USA.	<b>\$30</b>	C
<b>CALCERT1</b>	Statement of Accuracy Certificate	<b>\$20</b>	C
<b>CALCERT2</b>	NIST Traceable Calibration Certificate	<b>\$85</b>	C
<b>Specials</b>	Special Applications are available for this model. Contact us to discuss your unique application requirements so we can develop a great solution for you	<b>Contact Factory</b>	



## FOR ADVANCED COUNTING SCALE APPLICATIONS, WHY NOT UPGRADE?

### 7800HR SERIES TOUCHSCREEN COUNT WEIGH SCALES

- Full alpha-numeric QWERTY keyboard for easy entry of scale data points
- Multi mode including Count, Weight, Check weighing and Setpoint relay operation
- SKU/Product ID Database to store and recall by alphanumeric Part#, Description, Piece Weight, Tare Weight, 3 user-defined Fields, Over/Under Check weigh Settings, Setpoint/Relay Target settings

*Details on Page 4*

# 7500HR HIGH RESOLUTION COUNT WEIGH SCALES

## Standard Features

- High Resolution Counting and Weighing 20,000 Divisions
- Heavy-duty powder coated steel and SS construction
- Clean, convenient design with bright, Red LED display
- Simple functionality with Zero, Sample Set, Units and Print function buttons
- Two units of measurement, including lb., kg, g, oz t, lb. t, gr, dwt, oz, c, oz f, l, ml, tons and lb. - oz
- Easy to use one step counting
- One powerful and flexible standard serial port,
- Four-year limited warranty



## Specifications:

- Power AC line voltages 115/230 VAC, 50/60 Hz (Specify when ordering)
- Power Consumption 0.25A at 115 VAC, 0.13A at 230 VAC
- Circuit Protection RFI, EMI, ESD Protection ADC shielded
- Display: .56 LED Red, bright, stable and easy to read
- Indications for Gross, Net, Tare, Count, Piece Weight, % Accuracy, and Base 2
- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Internal Resolution 1/8,000,000
- Displayed Resolution. Standard 1/20,000. Up to 1/50,000
- 5 VDC excitation to power 350-ohm load cell
- Dimensions 8" X 8" or 12" X 14" Platter Size
- Warranty 4 Year Limited Warranty
- Legal for trade NTEP COC 91-149A7
- Measurement Canada COC AM-4869 Rev. 3
- Shipping Information: 23" X 21" X 7" Carton 19 lbs. Battery Option 23 lbs.



## Options:

- Battery AC operation, built-in re-chargeable system, 30+ hours of operation
- External power input 12 or 24 VDC.
- 220/230 VAC operation
- Ball-top transfer plate and roller conveyor
- Custom engineering for unique applications

Scan or Click the QR Codes for detailed product information

[7500HR Web Page](#)

[7500HR Product Literature](#)



# 7500HR HIGH RESOLUTION COUNT WEIGH SCALES

7500 Count Weigh Scale				
Part Number	Capacity/Resolution	Platform Size	List Price	Price Code
7500-2HR	2 X 0.0002 lbs. / 907.2 X 0.1 g	8" X 8"	<b>\$1,175</b>	A/B
7500-5HR	5 X 0.0005 lbs. / 2268 X 0.5 g	8" X 8"	<b>\$1,175</b>	A/B
7500-10HR	10 X 0.0005 lbs. / 4536 X .2 g	12" X 14"	<b>\$1,175</b>	A/B
7500-20HR	20 X 0.001 / 9.072 X 0.005 kg	12" X 14"	<b>\$1,175</b>	A/B
7500-50HR	50 X 0.002 lbs. / 22.68 X 0.001 kg	12" X 14"	<b>\$1,175</b>	A/B
7500-100HR	100 X 0.005 / 45.36 X 0.002 kg	12" X 14"	<b>\$1,175</b>	A/B
7500-150HR	150 X 0.01 lbs. / 68.04 X 0.005 kg	12" X 14"	<b>\$1,175</b>	A/B
7500-200HR	200 X 0.02 lbs. / 90.72 X 0.005 kg	12" X 14"	<b>\$1,175</b>	A/B
<b>Factory Calibration N/C</b>				
<b>7500 Basis Weight System</b>				
Part Number	Capacity/Resolution	Platform Size	List Price	Price Code
7500-2 BW	2 X 0.0002 lbs. / 907.2 X 0.1 g	12" X 14"	<b>\$1,175</b>	A/B
7500-5 BW	5 X 0.0005 lbs. / 2268 X 0.5 g	12" X 14"	<b>\$1,175</b>	A/B
7500-10 BW	10 0.0005 lbs. / 4536 X .2 g	12" X 14"	<b>\$1,175</b>	A/B
7500-20 BW	20 X 0.001 / 9.072 X 0.005 kg	12" X 14"	<b>\$1,175</b>	A/B
<b>Factory Calibration N/C</b>				
<b>7500 Money Manager System</b>				
Part Number	Capacity/Resolution	Platform Size	List Price	Price Code
7500-20 MM	20 X 0.001 / 9.072 X 0.005 kg	12" X 14"	<b>\$1,175</b>	A/B
7500-50 MM	50 X 0.002 lbs. / 22.68 X 0.001 kg	12" X 14"	<b>\$1,175</b>	A/B
7500-100 MM	100 X 0.005 / 45.36 X 0.002 kg	12" X 14"	<b>\$1,175</b>	A/B
<b>Factory Calibration N/C</b>				
<b>Options - Note "XXX" = capacity</b>				
Part Number	Description	List Price	Price Code	
7500-XXXHR 220VAC	220/230 VAC Operation	<b>\$1,175</b>	B	
7500-XXXHR 12DC	External power input 12 or 24 VDC. Specify at time of order, requires external power supply of 12 or 24 VDC	<b>\$1,175</b>	B	
7500-XXXHR AO	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	<b>\$1,525</b>	B	
7500-XXXHR BT	7500 scale with 12" X 14" ball top transfer plate. 18, 1.5" balls with 3.5" center to center spacing. Available in 50 lbs. capacity and higher only.	<b>\$1,525</b>	B	
7500-XXXHR DC	Built in rechargeable battery option. 30+ hours of continuous operation with integrated battery charger and heavy duty power cord.	<b>\$1,485</b>	B	
7500-XXXHR RT	7500 Scale with 12" X 14" roller conveyor option. High strength lightweight roller conveyors, 1.25" diameter rollers, 1.5" center to center spacing Available in 50 lbs. + capacity	<b>\$1,525</b>	B	



# 7500HR HIGH RESOLUTION COUNT WEIGH SCALES

Part Number	Description	List Price	Price Code
PSCRD2.4	Mini Remote Display with 2.4" LED Digits. Display Count or Weight. Includes 10' of serial interface cable	\$695	C
PSCRD4.7	Remote Display with Visor with 4.7 LED Digits. Display weight with GROSS/NET/TARE Indicators	\$1,250	C
57513-1	Replacement battery pack	\$95	C
61510	10" Plastic Scoop. 10" x 2-3/4" footed round plastic scoop ideal for parts counting or weighing ingredients or components. It is made of food grade polypropylene and is manufactured in the USA.	\$30	C
CALCERT1	Statement of Accuracy Certificate	\$20	C
CALCERT2	NIST Traceable Calibration Certificate	\$85	C
Specials	Special Applications are available for this model. Contact us to discuss your unique application requirements so we can develop a great solution for you	<b>Contact Factory</b>	



## FOR ADVANCED COUNTING SCALE APPLICATIONS, WHY NOT UPGRADE?

### 7800HR SERIES TOUCHSCREEN COUNT WEIGH SCALES

- Full alpha-numeric QWERTY keyboard for easy entry of scale data points
- Multi mode including Count, Weight, Check weighing and Setpoint relay operation
- SKU/Product ID Database to store and recall by alphanumeric Part#, Description, Piece Weight, Tare Weight, 3 user-defined Fields, Over/Under Check weigh Settings, Setpoint/Relay Target settings

*Details on Page 4*

### 7600HR COUNT WEIGH SCALES

- Full functions with Sample, Zero, Tare, Keypad Tare, Gross/Net, Piece Weight, Print, Base and Units
- Two units of measurement, including lb., kg, g, oz t, lb. t, gr, dwt, oz, c, oz f, l, ml, tons and lb. - oz
- Single or optional dual base-counting and weighing
- Multiple count modes and Auto Sample Update and percent-of error/accuracy display

*Details on Page 7*

# 7300HR HIGH RESOLUTION WEIGH SCALES

## Standard Features

- High Resolution Counting and Weighing 20,000 Divisions
- Heavy-duty powder coated steel and SS construction
- Clean, convenient design with bright, Red LED display
- Simple functionality with Zero, Units and Print function buttons
- Two units of measurement, including lb., kg, g, oz t, lb. t, gr, dwt, oz, c, oz f, l, ml, tons and lb. - oz
- One powerful and flexible standard serial port,
- Four-year limited warranty

## Specifications:

- Power AC line voltages 115/230 VAC, 50/60 Hz (Specify when ordering)
- Power Consumption 0.25A at 115 VAC, 0.13A at 230 VAC
- Circuit Protection RFI, EMI, ESD Protection ADC shielded
- Display: .56 LED Red, bright, stable and easy to read
- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Internal Resolution 1/8,000,000
- Displayed Resolution. Standard 1/20,000. Up to 1/50,000
- 5 VDC excitation to power 350-ohm load cells
- Dimensions 8" X 8" or 12" X 14" Platter
- Warranty 4 Year Limited Warranty
- Legal for trade NTEP COC 91-149A7
- Measurement Canada COC AM-4869 Rev. 3
- Shipping Information: 23" X 21" X 7" Carton 19 lbs. Battery Option 23 lbs.



## Options:

- Battery AC operation, built-in re-chargeable system, 30+ hours of operation
- Printers for label, barcode label or receipt printing
- External power input 12 or 24 VDC.
- 220/230 VAC operation
- Ball-top transfer plate and roller conveyor
- Communications Wired Ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth®
- Analog output, 4-20ma or 0-10vdc
- Custom engineering for unique applications



Scan or Click the QR Codes for detailed product information

[7300HR Web Page](#)



[7300HR Product Literature](#)



# 7300HR HIGH RESOLUTION WEIGH SCALES

<b>7300 Scale</b>				
<b>Part Number</b>	<b>Capacity Lbs.</b>	<b>Platform Size</b>	<b>List Price</b>	<b>Price Code</b>
<b>7300-2HR</b>	2 X 0.0002 lbs. / 907.2 X 0.1 g	8" X 8"	<b>\$1,050</b>	A/B
<b>7300-5HR</b>	5 X 0.0005 lbs. / 2268 X 0.5 g	8" X 8"	<b>\$1,050</b>	A/B
<b>7300-10HR</b>	10 X 0.0005 lbs. / 4536 X .2 g	12" X 14"	<b>\$1,050</b>	A/B
<b>7300-20HR</b>	20 X 0.001 / 9.072 X 0.005 kg	12" X 14"	<b>\$1,050</b>	A/B
<b>7300-50HR</b>	50 X 0.002 lbs. / 22.68 X 0.001 kg	12" X 14"	<b>\$1,050</b>	A/B
<b>7300-100HR</b>	100 X 0.005 / 45.36 X 0.002 kg	12" X 14"	<b>\$1,050</b>	A/B
<b>7300-150HR</b>	150 X 0.01 lbs. / 68.04 X 0.005 kg	12" X 14"	<b>\$1,050</b>	A/B
<b>7300-200HR</b>	200 X 0.02 lbs. / 90.72 X 0.005 kg	12" X 14"	<b>\$1,050</b>	A/B
<b>Factory Calibration N/C</b>				
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>	
<b>7300-XXXHR 220VAC</b>	220/230 VAC Operation	<b>\$1,050</b>	B	
<b>7300-XXXHR 12DC</b>	External power input 12 or 24 VDC. Specify at time of order, requires external power supply of 12 or 24 VDC	<b>\$1,050</b>	B	
<b>7300-XXXHR AO</b>	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	<b>\$1,400</b>	B	
<b>7300-XXXHR BT</b>	Ball top transfer plate option for scale with 12" X 14" ball top transfer plate. 18, 1.5" balls with 3.5" center to center spacing. Available in 50 lbs. capacity and higher only.	<b>\$1,395</b>	B	
<b>7300-XXXHR BTH</b>	Blue tooth option. Internal blue tooth transmitter/receiver for com port communication.	<b>\$1,350</b>	B	
<b>7300-XXXHR DC</b>	Built in rechargeable battery option. 30+ hours of continuous operation with integrated battery charger and heavy-duty power cord.	<b>\$1,260</b>	B	
<b>7300-XXXHR EO</b>	Wired ethernet option. Wired ethernet communication port, fully networked configurable with bulkhead RJ45 connector. Includes software utility for setup and configuration	<b>\$1,400</b>	B	
<b>7300-XXXHR HID</b>	Human interface device USB Option. Provides keyboard emulation USB port with USB "A" bulkhead connector	<b>\$1,350</b>	B	
<b>7300-XXXHR RT</b>	Roller conveyor option for scale with 12" X 14" roller conveyor option. High strength lightweight roller conveyors, 1.25" diameter rollers, 1.5" center to center spacing Available in 50 lbs. capacity and higher only.	<b>\$1,395</b>	B	
<b>7300-XXXHR TD</b>	Time and date option. Provides time and date data output	<b>\$1,125</b>	B	
<b>7300-XXXHR USB</b>	USB option. Provides USB com port communications with USB "A" bulkhead connector	<b>\$1,350</b>	B	
<b>7300-XXXHR WIFI</b>	Wi-Fi option. Wireless ethernet communication with bulkhead mounted antenna, fully networked configurable. Includes software utility for setup and configuration	<b>\$1,450</b>	B	



## 7300HR HIGH RESOLUTION WEIGH SCALES

Options - Note "XXX" = capacity			
Part Number	Description	List Price	Price Code
<b>57513-1</b>	Replacement battery pack	<b>\$95</b>	C
<b>DT2PRINTER-2</b>	2" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above	<b>\$495</b>	C
<b>DT4PRINTER-2</b>	4" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above	<b>\$525</b>	C
<b>DTR2PRINTER-2</b>	2" Direct thermal receipt printer. Includes 6' scale to printer cable.	<b>\$295</b>	C
<b>CUSTLABEL</b>	Custom Label Programming. Design & Setup of label for a plug and play. See custom label worksheet on page 72 – 74	<b>\$195</b>	C
<b>CALCERT1</b>	Statement of Accuracy Certificate	<b>\$20</b>	C
<b>CALCERT2</b>	NIST Traceable Calibration Certificate	<b>\$85</b>	C
<b>Specials</b>	Special Applications are available for this model. Contact us to discuss your unique application requirements so we can develop a great solution for you	<b>Contact Factory</b>	

# 7000HR HIGH RESOLUTION BENCH BASE

## Standard Features

- Heavy-duty die cast Aluminum and SS construction
- 10' cable for indicator connection. Standard CPC quick disconnect for use with all Pennsylvania Scale indicators
- High performance and rugged 1042 profile load cell for extremely accurate weigh or counting applications
- Four-year limited warranty



## Specifications:

- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Dimensions 8" X 8" or 12" X 14" Platter Size
- Full scale output 2 mV/V +/- 10%
- Recommended supply voltage 5-12 VDC
- Warranty 4 Year Limited Warranty
- Legal for trade NTEP COC 91-149A7
- Measurement Canada COC AM-4869 Rev. 3
- Shipping Information: 23" X 21" X 7" Carton 15 lbs.



## Options:

- Ball-top transfer plate and roller conveyor
- Extended load cell cable
- Custom engineering for unique applications



Scan or Click the QR Codes for detailed product information

[7000 Web Page](#)

[7000 Product Literature](#)



# 7000HR HIGH RESOLUTION BENCH BASE

7000 Base Standard Resolution				
Part Number	Capacity Lbs.	Platform Size	List Price	Price Code
<b>7000-2HR</b>	2 X 0.0002 lbs. / 907.2 X 0.1 g	8" X 8"	<b>\$735</b>	A/B
<b>7000-5HR</b>	5 X 0.0005 lbs. / 2268 X 0.5 g	8" X 8"	<b>\$735</b>	A/B
<b>7000-10HR</b>	10 X 0.0005 lbs. / 4536 X .2 g	12" X 14"	<b>\$735</b>	A/B
<b>7000-20HR</b>	20 X 0.001 / 9.072 X 0.005 kg	12" X 14"	<b>\$735</b>	A/B
<b>7000-50HR</b>	50 X 0.002 lbs. / 22.68 X 0.001 kg	12" X 14"	<b>\$735</b>	A/B
<b>7000-100HR</b>	100 X 0.005 / 45.36 X 0.002 kg	12" X 14"	<b>\$735</b>	A/B
<b>7000-150HR</b>	150 X 0.01 lbs. / 68.04 X 0.005 kg	12" X 14"	<b>\$735</b>	A/B
<b>7000-200HR</b>	200 X 0.02 lbs. / 90.72 X 0.005 kg	12" X 14"	<b>\$735</b>	A/B
Factory Calibration - Factory matching when ordered with any Pennsylvania host counting scale (7600 DB or 7800 DB) or digital indicator as a system N/C				
<b>Options - Note "XXX" = capacity</b>				
Part Number	Description	List Price	Price Code	
<b>7000-XXXHR BT</b>	Ball top transfer plate option. For scale with 12" X 14" ball top transfer plate. 18, 1.5" balls with 3.5" center to center spacing. Available in 50 lbs. capacity and higher only.	<b>\$1,075</b>	B	
<b>7000-XXXHR RT</b>	Roller conveyor option. For scale with 12" X 14" roller conveyor option. High strength lightweight roller conveyors, 1.25" diameter rollers, 1.5" center to center spacing Available in 50 lbs. capacity and higher only.	<b>\$1,075</b>	B	
<b>61510</b>	10" Plastic Scoop. 10" x 2-3/4" footed round plastic scoop ideal for parts counting or weighing ingredients or components. It is made of food grade polypropylene and is manufactured in the USA.	<b>\$30</b>	C	
<b>CALCERT1</b>	Statement of Accuracy Certificate	<b>\$20</b>	C	
<b>CALCERT2</b>	NIST Traceable Calibration Certificate	<b>\$85</b>	C	
<b>SAE-3140</b>	6.5" Bracket and Column. Mounts to bottom of 7000 base with Flat plate on top to mount 7400, 7500/4, 7600/4 or 7600E indicator. 6.5" from top of scale base to bottom of "U" bracket.	<b>\$115</b>	C	



**FOR HEAVIER CAPACITY AND LARGER SIZE BASES THAT MAY BE USED AS A BENCH/FLOOR SCALE:**

**M6400 SERIES BASE**

- Available in 12" X 12", 18" X 18", 18" X 24", 24" X 24" & 24" X 30"
- Available in 100, 250, 500 & 1,000 lbs. capacities.

*Details on Page 37*



# SS6500 WASHDOWN BASE

## Standard Features

- IP66K/IP67 Heavy Duty Washdown Protection
- 304 Stainless steel Design including load cell and all hardware
- Sanitary, easy to clean design
- 300% Overload protection
- Heavy duty polyurethane jacketed 6' load cell cable




## Specifications:

- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Dimensions 12" X 12", 12" 16" and 16" X 16" sizes
- Full scale output 2 mV/V +/- 10%
- Recommended supply voltage 5-12 VDC
- Two Year Limited Warranty

## Options:

- Extended load cell cable
- Custom engineering for unique applications

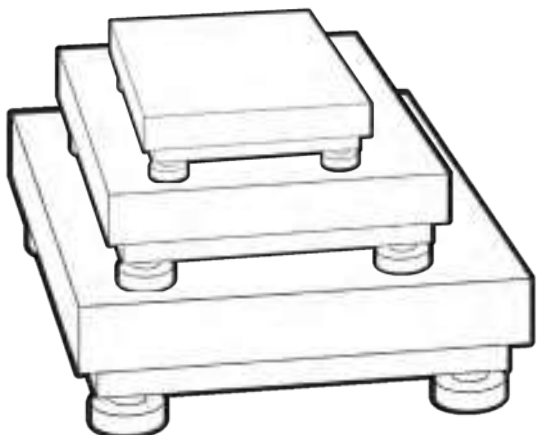

Scan or Click the QR Codes for detailed product information

[SS6500 Web Page](#)



[SS6500 Product Literature](#)



## SS6500 WASHDOWN BASE

<b>SS6500 Stainless Steel Washdown Base</b>				
Part Number	Capacity Lbs.	Platform Size	List Price	Price Code
SS6500-1212-25	25 X 0.005 lbs / 11.35 X 0.005 kg	12" X 12"	<b>\$1,195</b>	B
SS6500-1212-50	50 X 0.01 lbs / 22.65 X 0.005 kg	12" X 12"	<b>\$1,195</b>	B
SS6500-1212-100	100 X 0.02 lbs / 45.36 X 0.01 kg	12" X 12"	<b>\$1,195</b>	B
SS6500-1216-50	50 X 0.01 lbs / 22.65 X 0.005 kg	12" x 16"	<b>\$1,245</b>	B
SS6500-1216-100	100 X 0.02 lbs / 45.36 X 0.01 kg	12" x 16"	<b>\$1,245</b>	B
SS6500-1216-150	150 X 0.05 lbs / 68.00 X 0.02 kg	12" x 16"	<b>\$1,245</b>	B
SS6500-1616-100	100 X 0.02 lbs / 45.36 X 0.01 kg	16" X 16"	<b>\$1,295</b>	B
SS6500-1616-250	250 X 0.05 lbs / 113.4 X 0.05 kg	16" X 16"	<b>\$1,295</b>	B
SS6500-1616-500	500 X 0.1 lbs / 226.8 X 0.05 kg	16" X 16"	<b>\$1,295</b>	B
Factory Calibration - Factory matching when ordered with any Pennsylvania host digital indicator as a system N/C				
<b>SS6500 Base Options</b>				
Part Number	Description	List Price	Price Code	
56729	18" SS Column assembly	95	B	
61510	10" Plastic Scoop. 10" x 2-3/4" footed round plastic scoop ideal for parts counting or weighing ingredients or product. It is made of food grade polypropylene and is manufactured in the USA.	\$30	C	
CALCERT1	Statement of Accuracy Certificate	\$20	C	
CALCERT2	NIST Traceable Calibration Certificate	\$85	C	



**FOR HEAVIER CAPACITY AND LARGER SIZE BASES THAT MAY BE USED AS A BENCH  
OR FLOOR SCALE:**

**SS6400 SERIES BASE**

- Heavy duty 304 Stainless Steel tube frame and heavy gauge platform cover
- Platform Cover with #3 finish
- Available in 18" X 18", 18" X 24" & 24" X 24"
- Available in 100, 250, 500 & 1,000 lbs. capacities.

*Details on Page 40*

# SS7800MAX WASHDOWN BENCH SCALE

## Standard Features

- IP69K Wash down protection with a 304 stainless steel design including load cell and all hardware resists corrosion from harsh cleaning chemicals and repeated washdown
- Hygienic and easy to clean design, completely sealed indicator and welded corners on platform cover along with an open design base structure makes this easy to clean without areas to collect water or debris
- Interior mounted display overlay, unique gasket and support design provides washdown seal with only four (4) bolts on backplate.
- Full alpha-numeric QWERTY keyboard for easy entry of scale data points
- Check weighing and Setpoint relay operation
- 750 SKU/Product ID Database to store and recall by alphanumeric Part#, Description, 3 user-defined Fields, Tare Weight, Over/Under Check weigh Settings, Setpoint/Relay Target settings
- Adaptive changes to show 4 units of measurement, including lb., kg, g, oz t, lb. t, gr, dwt, oz, c, oz f, l, ml, tons and lb. - oz
- Two powerful and flexible standard serial ports, optional EtherNet/IP, Wired Ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth
- Four Year Limited Warranty

## Specifications:

- Power AC line voltages 115/230 VAC, 50/60 Hz (Specify when ordering)
- Power Consumption 0.25A at 115 VAC, 0.13A at 230 VAC
- Circuit Protection RFI, EMI, ESD Protection ADC shielded
- Display: .56 LED Red, bright, stable and easy to read
- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Internal Resolution 1/8,000,000
- Displayed Resolution. Standard 1/10,000. Up to 1/50,000
- 5 VDC excitation to power 350-ohm load cells
- Two Year Limited Warranty



## Options:

- **New! Ethernet IP**
- Dual base input
- External power input 12 or 24 VDC, specify at time of order, requires external power supply of 12 or 24 VDC
- 220/230 VAC Operation
- 1 Alarm Buzzer Mounted inside scale or indicator
- Setpoint/relays DC or AC
- EtherNet/IP, Wired Ethernet and Wi-Fi TCP/IP
- USB com port and keyboard emulation HID  
Bluetooth com port and keyboard emulation HID

Scan or Click the QR Codes for detailed product information

[SS7800MAX Product Video](#)



[SS7800MAX Web Page](#)



[SS7800 MAX Product Literature](#)



# SS7800MAX WASHDOWN BENCH SCALE

SS7800MAX-YYYY-XXXHR with 7800MAX Indicator, SS6500 Base and 14" Column				
Part Number	Capacity Lbs.	Platform Size	List Price	Price Code
SS7800MAX-1212-25	25 X 0.005 lbs / 11.35 X 0.005 kg	12" X 12"	<b>\$2,890</b>	B
SS7800MAX-1212-50	50 X 0.01 lbs / 22.65 X 0.005 kg	12" X 12"	<b>\$2,890</b>	B
SS7800MAX-1212-100	100 X 0.02 lbs / 45.36 X 0.01 kg	12" X 12"	<b>\$2,890</b>	B
SS7800MAX-1216-50	50 X 0.01 lbs / 22.65 X 0.005 kg	12" x 16"	<b>\$2,940</b>	B
SS7800MAX-1216-100	100 X 0.02 lbs / 45.36 X 0.01 kg	12" x 16"	<b>\$2,940</b>	B
SS7800MAX-1216-150	150 X 0.05 lbs / 68.00 X 0.02 kg	12" x 16"	<b>\$2,940</b>	B
SS7800MAX-1616-100	100 X 0.02 lbs / 45.36 X 0.01 kg	16" X 16"	<b>\$2,990</b>	B
SS7800MAX-1616-250	250 X 0.05 lbs / 113.4 X 0.05 kg	16" X 16"	<b>\$2,990</b>	B
SS7800MAX-1616-500	500 X 0.1 lbs / 226.8 X 0.05 kg	16" X 16"	<b>\$2,990</b>	B
SS7800MAX Options - Note "XXX" = capacity				
Part Number	Description	List Price	Price Code	
SS7800MAX-1212-XXX AB	1 Alarm Buzzer Mounted inside scale or indicator	<b>\$3,015</b>	B	
SS7800MAX-1216-XXX AB		<b>\$3,065</b>	B	
SS7800MAX-1616-XXX AB		<b>\$3,115</b>	B	
SS7800MAX-1212-XXX AO	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	<b>\$3,240</b>	B	
SS7800MAX-1216-XXX AO		<b>\$3,290</b>	B	
SS7800MAX-1616-XXX AO		<b>\$3,340</b>	B	
SS7800MAX-1212-XXX BTH	Blue tooth option. Internal blue tooth transmitter/receiver for com port communication.	<b>\$3,190</b>	B	
SS7800MAX-1216-XXX BTH		<b>\$3,240</b>	B	
SS7800MAX-1616-XXX BTH		<b>\$3,290</b>	B	
SS7800MAX-1212-XXX DC	Built in rechargeable battery option. 30+ hours of continuous operation with integrated battery charger and heavy duty power cord.	<b>\$3,100</b>	B	
SS7800MAX-1216-XXX DC		<b>\$3,150</b>	B	
SS7800MAX-1616-XXX DC		<b>\$3,200</b>	B	
SS7800MAX-1212-XXX DCR	Four VDC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 32 VDC at 1 Amp	<b>\$3,140</b>	B	
SS7800MAX-1216-XXX DCR		<b>\$3,190</b>	B	
SS7800MAX-1616-XXX DCR		<b>\$3,240</b>	B	
SS7800MAX-1212-XXX EIP	EtherNet/IP Communication option. Wired, fully configurable and programable with bulkhead RJ45 connector	<b>\$3,490</b>	B	
SS7800MAX-1216-XXX EIP		<b>\$3,540</b>	B	
SS7800MAX-1616-XXX EIP		<b>\$3,590</b>	B	
SS7800MAX-1212-XXX EO	Wired ethernet option. Wired ethernet communication port, fully networked configurable with bulkhead RJ45 connector. Includes software utility for setup and configuration	<b>\$3,240</b>	B	
SS7800MAX-1216-XXX EO		<b>\$3,290</b>	B	
SS7800MAX-1616-XXX EO		<b>\$3,340</b>	B	
SS7800MAX-1212-XXX HID	Human interface device USB Option. Provides keyboard emulation USB port with USB "A" bulkhead connector IP68 Washdown rated Includes 2 meter washdown cable	<b>\$3,190</b>	B	
SS7800MAX-1216-XXX HID		<b>\$3,240</b>	B	
SS7800MAX-1616-XXX HID		<b>\$3,290</b>	B	
SS7800MAX-1212-XXX SSR	Four 120 VAC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 250 VAC at 1 Amp	<b>\$3,140</b>	B	
SS7800MAX-1216-XXX SSR		<b>\$3,190</b>	B	
SS7800MAX-1616-XXX SSR		<b>\$3,240</b>	B	
SS7800MAX-1212-XXX USB	USB option. Provides USB comport communications with USB "A" bulkhead connector. IP68 Washdown Rated includes 2-meter washdown cable	<b>\$3,190</b>	B	
SS7800MAX-1216-XXX USB		<b>\$3,240</b>	B	
SS7800MAX-1616-XXX USB		<b>\$3,290</b>	B	



## SS7800MAX WASHDOWN BENCH SCALE

<b>SS7800MAX Options - Note "XXX" = capacity.</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>DT2PRINTER-2</b>	2" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL below (Not Washdown, wipe down only)	<b>\$495</b>	C
<b>DT4PRINTER-2</b>	4" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL below (Not Washdown, wipe down only)	<b>\$525</b>	C
<b>DTR2PRINTER-2</b>	2" Direct thermal receipt printer. Includes 6' scale to printer cable. (Not Washdown, wipe down only)	<b>\$295</b>	C
<b>CUSTLABEL</b>	Custom Label Programming. Design and set up of custom label for a plug and play system. See custom label worksheet on page 72 - 74	<b>\$195</b>	C
<b>CALCERT1</b>	Statement of Accuracy Certificate	<b>\$20</b>	C
<b>61510</b>	10" Plastic Scoop. 10" x 2-3/4" footed round plastic scoop ideal for parts counting or weighing ingredients or product. It is made of food grade polypropylene and is manufactured in the USA.	<b>\$30</b>	C
<b>CALCERT2</b>	NIST Traceable Calibration Certificate	<b>\$85</b>	C

# SS6500 WASHDOWN BENCH SCALE

## Standard Features

- Outstanding performance in washdown sanitary production environments
- Washdown rating of IP66K/IP67/Nema 4X for high pressure washdown protection
- 304 stainless steel design including load cell and all hardware resists corrosion from harsh cleaning chemicals and repeated washdown
- 300% overload protection
- Hygienic and easy to clean design, completely sealed indicator and welded corners on platform cover along with an open design base structure makes this easy to clean without areas to collect water or debris
- Includes 14" or 18" Column
- Choose from simple interface 7400 WD indicator or for more advanced operation the 7600 WD indicator
- Weight displayed in any two units of measurement, including lb., kg, g, oz t, lb. t, gr, dwt, oz, c, oz f, l, ml, tons and lb. – oz
- Serial com port standard, bi-directional and programmable, optional Ethernet, Wi-Fi, USB, Bluetooth and analog output

## Specifications:

- Power AC line voltages 115/230 VAC, 50/60 Hz (Specify when ordering)
- Power Consumption 0.25A at 115 VAC, 0.13A at 230 VAC
- Circuit Protection RFI, EMI, ESD Protection ADC shielded
- Display: .56 LED Red, bright, stable and easy to read
- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Internal Resolution 1/8,000,000
- Displayed Resolution. Standard 1/10,000. Up to 1/50,000
- 5 VDC excitation to power 350-ohm load cells
- Two Year Limited Warranty



## Options:

- Dual base input
- Battery AC operation, built in re-chargeable system, 30+ hours of operation
- External power input 12 or 24 VDC, specify at time of order, requires external power supply of 12 or 24 VDC
- 220/230 VAC Operation
- 1 Alarm Buzzer Mounted inside scale or indicator
- Setpoint/Relays DC or AC
- Wired Ethernet and Wi-Fi TCP/IP
- USB com port and keyboard emulation HID
- Bluetooth com port and keyboard emulation HID

Scan or Click the QR Codes for detailed product information

[SS6500 Web Page](#)



[SS6500 Product Literature](#)



# SS6500 WASHDOWN BENCH SCALE

<b>SS6574-YYYY-XXXHR with 7400 WD indicator and 14" or 18" Column</b>				
Part Number	Capacity Lbs.	Platform Size	List Price	Price Code
SS6574-1212-25	25 X 0.005 lbs / 11.35 X 005 kg	12" X 12"	<b>\$1,895</b>	B
SS6574-1212-50	50 X 0.01 lbs / 22.65 X 0.005 kg	12" X 12"	<b>\$1,895</b>	B
SS6574-1212-100	100 X 0.02 lbs / 45.36 X 0.01 kg	12" X 12"	<b>\$1,895</b>	B
SS6574-1216-50	50 X 0.01 lbs / 22.65 X 0.005 kg	12" x 16"	<b>\$1,995</b>	B
SS6574-1216-100	100 X 0.02 lbs / 45.36 X 0.01 kg	12" x 16"	<b>\$1,995</b>	B
SS6574-1216-150	150 X 0.05 lbs / 68.00 X 0.02 kg	12" x 16"	<b>\$1,995</b>	B
SS6574-1616-100	100 X 0.02 lbs / 45.36 X 0.01 kg	16" X 16"	<b>\$2,045</b>	B
SS6574-1616-250	250 X 0.05 lbs / 113.4 X 0.05 kg	16" X 16"	<b>\$2,045</b>	B
SS6574-1616-500	500 X 0.1 lbs / 226.8 X 0.05 kg	16" X 16"	<b>\$2,045</b>	B
<b>Factory Calibration No Charge</b>				
<b>SS6576-YYYY-XXXHR with 7600/4 WD indicator and 14" or 18" Column</b>				
Part Number	Capacity Lbs.	Platform Size	List Price	Price Code
SS6576-1212-25	25 X 0.005 lbs / 11.35 X 005 kg	12" X 12"	<b>\$1,945</b>	B
SS6576-1212-50	50 X 0.01 lbs / 22.65 X 0.005 kg	12" X 12"	<b>\$1,945</b>	B
SS6576-1212-100	100 X 0.02 lbs / 45.36 X 0.01 kg	12" X 12"	<b>\$1,945</b>	B
SS6576-1216-50	50 X 0.01 lbs / 22.65 X 0.005 kg	12" x 16"	<b>\$2,045</b>	B
SS6576-1216-100	100 X 0.02 lbs / 45.36 X 0.01 kg	12" x 16"	<b>\$2,045</b>	B
SS6576-1216-150	150 X 0.05 lbs / 68.00 X 0.02 kg	12" x 16"	<b>\$2,045</b>	B
SS6576-1616-100	100 X 0.02 lbs / 45.36 X 0.01 kg	16" X 16"	<b>\$2,095</b>	B
SS6576-1616-250	250 X 0.05 lbs / 113.4 X 0.05 kg	16" X 16"	<b>\$2,095</b>	B
SS6576-1616-500	500 X 0.1 lbs / 226.8 X 0.05 kg	16" X 16"	<b>\$2,095</b>	B
<b>SS6574 Options - Note "XXX" = capacity</b>				
Part Number	Description	List Price	Price Code	
SS6574-1212-XXX 12 DC	External power input 12 or 24 VDC. Specify at time of order, requires external power supply of 12 or 24 VDC	<b>\$1,895</b>	B	
SS6574-1216-XXX 12 DC		<b>\$1,995</b>	B	
SS6574-1616-XXX 12 DC		<b>\$2,045</b>	B	
SS6574-1212-XXX 220VAC	220/230 VAC Operation	<b>\$1,895</b>	B	
SS6574-1216-XXX 220VAC		<b>\$1,995</b>	B	
SS6574-1616-XXX 220VAC		<b>\$2,045</b>	B	
SS6574-1212-XXX AO	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	<b>\$2,245</b>	B	
SS6574-1216-XXX AO		<b>\$2,345</b>	B	
SS6574-1616-XXX AO		<b>\$2,395</b>	B	
SS6574-1212-XXX DC	Built in rechargeable battery option. 30+ hours of continuous operation with integrated battery charger and heavy duty power cord.	<b>\$2,105</b>	B	
SS6574-1216-XXX DC		<b>\$2,205</b>	B	
SS6574-1616-XXX DC		<b>\$2,255</b>	B	
SS6574-1212-XXX EO	Wired ethernet option. Wired ethernet communication port, fully networked configurable with bulkhead RJ45 connector. Includes software utility for setup and configuration	<b>\$2,245</b>	B	
SS6574-1216-XXX EO		<b>\$2,345</b>	B	
SS6574-1616-XXX EO		<b>\$2,395</b>	B	
SS6574-1212-XXX WIFI	Wi-Fi option. Wireless ethernet communication with bulkhead mounted antenna, fully networked configurable. Includes software utility for setup and configuration	<b>\$2,295</b>	B	
SS6574-1216-XXX WIFI		<b>\$2,395</b>	B	
SS6574-1616-XXX WIFI		<b>\$2,445</b>	B	
57513-1	Replacement battery pack	<b>\$95</b>	C	

# SS6500 WASHDOWN BENCH SCALE

SS6576 Options - Note "XXX" = capacity			
Part Number	Description	List Price	Price Code
SS6576-1212-XXX 12DC	External power input 12 or 24 VDC. Specify at time of order,	\$1,945	B
SS6576-1216-XXX 12DC		\$2,045	B
SS6576-1616-XXX 12DC		\$2,095	B
SS6576-1212-XXX 220VAC	220/230 VAC Operation	\$1,945	B
SS6576-1216-XXX 220VAC		\$2,045	B
SS6576-1616-XXX 220VAC		\$2,095	B
SS6576-1212-XXX AB	1 Alarm Buzzer Mounted inside scale or indicator	\$2,070	B
SS6576-1216-XXX AB		\$2,170	B
SS6576-1616-XXX AB		\$2,220	B
SS6576-1212-XXX AO	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	\$2,295	B
SS6576-1216-XXX AO		\$2,395	B
SS6576-1616-XXX AO		\$2,445	B
SS6576-1212-XXX BTH	Blue tooth option. Internal blue tooth transmitter/receiver for com port communication.	\$2,245	B
SS6576-1216-XXX BTH		\$2,345	B
SS6576-1616-XXX BTH		\$2,395	B
SS6576-1212-XXX DC	Built in rechargeable battery option. 30+ hours of continuous operation with integrated battery charger and heavy duty power cord.	\$2,155	B
SS6576-1216-XXX DC		\$2,255	B
SS6576-1616-XXX DC		\$2,305	B
SS6576-1212-XXX DCR	Four VDC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 32 VDC at 1 Amp	\$2,195	B
SS6576-1216-XXX DCR		\$2,295	B
SS6576-1616-XXX DCR		\$2,345	B
SS6576-1212-XXX EO	Wired ethernet option. Wired ethernet communication port, fully networked configurable with bulkhead RJ45 connector. Includes software utility for setup and configuration	\$2,295	B
SS6576-1216-XXX EO		\$2,395	B
SS6576-1616-XXX EO		\$2,445	B
SS6576-1212-XXX HID	Human interface device USB Option. Provides keyboard emulation USB port with USB "A" bulkhead connector IP68 Washdown rated Includes 2 meter washdown cable	\$2,245	B
SS6576-1216-XXX HID		\$2,345	B
SS6576-1616-XXX HID		\$2,395	B
SS6576-1212-XXX SSR	Four 120 VAC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 250 VAC at 1 Amp	\$2,195	B
SS6576-1216-XXX SSR		\$2,295	B
SS6576-1616-XXX SSR		\$2,345	B
SS6576-1212-XXXH USB	USB option. Provides USB comport communications with USB "A" bulkhead connector. IP68 Washdown Rated includes 2 meter washdown cable	\$2,245	B
SS6576-1216-XXX USB		\$2,345	B
SS6576-1616-XXX USB		\$2,395	B
SS6576-1212-XXX WIFI	Wi-Fi option. Wireless ethernet communication with bulkhead mounted antenna, fully networked configurable. Includes software utility for setup and configuration	\$2,345	B
SS6576-1216-XXX WIFI		\$2,445	B
SS6576-1616-XXX WIFI		\$2,495	B
57513-1	Replacement battery pack	\$95	C



## SS6500 WASHDOWN BENCH SCALE

<b>SS6576 Options - Note "XXX" = capacity.</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>DT2PRINTER-2</b>	2" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL below (Not Washdown, wipe down only)	<b>\$495</b>	C
<b>DT4PRINTER-2</b>	4" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL below (Not Washdown, wipe down only)	<b>\$525</b>	C
<b>DTR2PRINTER-2</b>	2" Direct thermal receipt printer. Includes 6' scale to printer cable. (Not Washdown, wipe down only)	<b>\$295</b>	C
<b>CUSTLABEL</b>	Custom Label Programming. Design and set up of custom label for a plug and play system. See custom label worksheet on page 72 - 74	<b>\$195</b>	C
<b>CALCERT1</b>	Statement of Accuracy Certificate	<b>\$20</b>	C
<b>61510</b>	10" Plastic Scoop. 10" x 2-3/4" footed round plastic scoop ideal for parts counting or weighing ingredients or product. It is made of food grade polypropylene and is manufactured in the USA.	<b>\$30</b>	C
<b>CALCERT2</b>	NIST Traceable Calibration Certificate	<b>\$85</b>	C

# 7800MAX SERIES IP69K WASH DOWN TOUCHSCREEN WEIGH INDICATOR

## Standard Features

- IP 69K Severe Washdown Protection
- Heavy-duty 304 SS Indicator Enclosure and “U” mounting bracket
- Interior mounted display overlay, unique gasket and support design provides washdown seal with only four (4) bolts on backplate.
- Clean, convenient design with bright, stable full-color display and touchscreen
- Full alpha-numeric QWERTY keyboard for easy entry of scale data points
- Check weighing and Setpoint relay operation
- 750 SKU/Product ID Database to store and recall by alphanumeric Part#, Description, 3 user-defined Fields, Tare Weight, Over/Under Check weigh Settings, Setpoint/Relay Target settings
- Adaptive changes to show 4 units of measurement, including lb., kg, g, oz t, lb. t, gr, dwt, oz, c, oz f, l, ml, tons and lb. - oz
- Two powerful and flexible standard serial ports, optional EtherNet/IP, Wired Ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth
- Four Year Limited Warranty

## Specifications:

- Power AC line voltages 115/230 VAC, 50/60 Hz (Specify when ordering)
- Power Consumption 0.25A at 115 VAC, 0.13A at 230 VAC
- Circuit Protection RFI, EMI, ESD Protection ADC shielded
- Display: 800 X 320 dot resolution, and 4.6” full-color LCD display with resistive touch panel
- Indications for Gross, Net, Tare, Check Weigh Over/Under/Accept, Setpoint Status, Active ID and Base 2
- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Internal Resolution 1/8,000,000
- Displayed Resolution. Standard 1/10,000. Up to 1/50,000
- 5 VDC excitation to power up to 12, 350 ohm load cells
- Dimensions 8” H X 11” W X 3” D
- Four Year Limited Warranty
- Legal for trade NTEP COC 97-009A5
- Shipping Information: 18” X 11” X 8” Carton 9 lbs.



## Options:

- **New! Ethernet IP**
- Second base input
- Printers for label, barcode label or receipt printing (Non-Wash Down)
- Barcode scanner (Non-Wash Down)
- Upgraded Internal Product DB, 1500 and 3000 entries
- External power input 12 or 24 VDC.
- 1 alarm buzzer mounted inside scale or indicator
- Ball-top transfer plate and roller conveyor
- Setpoint/relays DC or AC
- Alarm stack lights and buzzer
- Communications EtherNet/IP, Wired Ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth®
- Analog output, 4-20ma or 0-10vdc
- Custom engineering for unique applications

Scan or Click the QR Codes for detailed product information



[7800MAX Product Video](#)



[7800MAX Web Page](#)



[7800 MAX Product Literature](#)



**PENNSYLVANIA**  
SCALE COMPANY

# 7800MAX SERIES IP69K WASH DOWN TOUCHSCREEN WEIGH INDICATOR

<b>7800 MAX IP69K Washdown Touchscreen Indicator</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>7800MAX</b>	7800 MAX IP69K Wash Down Touchscreen digital weigh indicator. Heavy Gauge 304 SS Enclosure and "U" mounting bracket	\$1,695	B
<b>7800 Options</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>7800MAX EM</b>	Expanded database memory to store and recall 3,000-part numbers	<b>\$1,795</b>	B
<b>7800MAX AB</b>	1 Alarm Buzzer Mounted inside scale or indicator	<b>\$1,820</b>	B
<b>7800MAX AO</b>	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	<b>\$2,045</b>	B
<b>7800MAX BC</b>	Non-Washdown. Heavy duty industrial barcode scanner. Power supplied from scale with convenient bulkhead quick disconnect	<b>\$2,110</b>	B
<b>7800MAX BTH</b>	Bluetooth option. Internal Bluetooth transmitter/receiver for com port communication.	<b>\$1,995</b>	B
<b>7800MAX DB</b>	2nd Base Input – for dual base or sample/bulk counting applications	<b>\$1,890</b>	B
<b>7800MAX DCR</b>	Four VDC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 32 VDC at 1 Amp	<b>\$1,945</b>	B
<b>7800MAX EIP</b>	EtherNet/IP Communication option. Wired, fully configurable and programable with bulkhead RJ45 connector	<b>\$2,295</b>	B
<b>7800MAX EO</b>	Wired ethernet option. Wired ethernet communication port, fully networked configurable with bulkhead RJ45 connector. Includes software utility for setup and configuration	<b>\$2,045</b>	B
<b>7800MAX HID</b>	Human interface device USB Option. Provides keyboard emulation USB port with USB "A" bulkhead connector	<b>\$1,995</b>	B
<b>7800MAX SSR</b>	Four 120 VAC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 250 VAC	<b>\$1,945</b>	B
<b>7800MAX USB</b>	USB option. Provides USB com port communications with USB "A" bulkhead connector	<b>\$1,995</b>	B
<b>7800MAX WIFI</b>	Wi-Fi option. Wireless ethernet communication with bulkhead mounted antenna, fully networked configurable. Includes software utility for setup and configuration	<b>\$2,095</b>	B
<b>CUSTLABEL</b>	Custom Label Programming. Design and set up of custom label for a plug and play system. See custom label worksheet on page 72 - 74	<b>\$195</b>	C
<b>DT2PRINTER-2 NON-WASH DOWN</b>	2" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above	<b>\$495</b>	C
<b>DT4PRINTER-2 NON-WASH DOWN</b>	4" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above	<b>\$525</b>	C
<b>DTR2PRINTER-2 NON-WASH DOWN</b>	2" Direct thermal receipt printer. Includes 6' scale to printer cable.	<b>\$295</b>	C
<b>CALCERT1</b>	Statement of Accuracy Certificate	<b>\$20</b>	C
<b>Specials</b>	Special Applications are available for this model. Contact us to discuss your unique application requirements so we can develop a great solution for you	<b>Contact Factory</b>	

# 7600/4 WD & 7400 WD WASHDOWN WEIGH INDICATOR

## Standard Features

- Outstanding performance in washdown sanitary production environments
- Washdown rating of IP66K/IP67/Nema 4X for high pressure washdown protection
- 304 stainless steel design including all hardware resists corrosion from harsh cleaning chemicals and repeated washdown
- Hygienic and easy to clean design, completely sealed indicator and open design base makes this easy to clean without areas to collect water or debris
- Choose from simple interface 7400 WD indicator or for more advanced operation the 7600 WD indicator
- Weight displayed in any two units of measurement, including lb., kg, g, oz t, lb. t, gr, dwt, oz, c, oz f, l, ml, tons and lb. – oz
- Serial com port standard, bi-directional and programmable, optional Ethernet, Wi-Fi, USB, Bluetooth and analog output

## Specifications:

- Power AC line voltages 115/230 VAC, 50/60 Hz (Specify when ordering)
- Power Consumption 0.25A at 115 VAC, 0.13A at 230 VAC
- Circuit Protection RFI, EMI, ESD Protection ADC shielded
- Display: .56 LED Red, bright, stable and easy to read
- Indications for Gross, Net, Tare, Count, Piece Weight, % Accuracy, and Base 2
- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Internal Resolution 1/8,000,000
- Displayed Resolution. Standard 1/10,000. Up to 1/50,000
- 5 VDC excitation to power up to 12, 350-ohm load cells
- Dimensions 8" H X 11" W X 3" D
- Four Year Limited Warranty
- Legal for trade NTEP COC 91-149A7
- Measurement Canada COC AM-4869 Rev. 3
- Shipping Information: 18" X 11" X 8" Carton 7 lbs. with Battery Option 12 lbs.



## Options:

- Second base input (7600/4 only)
- Battery AC operation, built-in re-chargeable system, 30+ hours of operation
- Printers for label, barcode label, ticket or receipt printing (7600/4 and not washdown wipe down only)
- External power input 12 or 24 VDC.
- 220/230 VAC operation
- 1 alarm buzzer mounted inside scale or indicator (7600/4 only)
- Setpoint/relays DC or AC (7600/4 only)
- Alarm stack lights and buzzer (7600/4 only)
- Communications Wired Ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth® (7600/4 only)
- Analog output, 4-20ma or 0-10vdc
- Custom engineering for unique applications



Scan or Click the QR Codes for detailed product information

[7400 WD Product Literature](#)



[7600/4 WD Product Literature](#)



**PENNSYLVANIA**  
SCALE COMPANY



# 7600/4 WD & 7400 WD WASHDOWN WEIGH INDICATOR

<b>7400 WD &amp; 7600/4 WD Washdown Indicator</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>7400 WD</b>	7400 WD IP66K/IP67 Wash down indicator	<b>\$895</b>	A/B
<b>7600/4 WD</b>	7600 WD IP66K/IP67 Wash down indicator	<b>\$925</b>	A/B
<b>7400 WD Options</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>7400 WD 12DC</b>	External power input 12 or 24 VDC. Specify at time of order, requires external power supply of 12 or 24 VDC	<b>\$895</b>	B
<b>7400 WD 220VAC</b>	220/230 VAC Operation	<b>\$895</b>	B
<b>7400 WD AB</b>	1 Alarm Buzzer Mounted inside scale or indicator	<b>\$1,020</b>	B
<b>7400 WD AO</b>	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	<b>\$1,245</b>	B
<b>7400 WD DC</b>	Built in rechargeable battery option. 30+ hours of continuous operation with integrated battery charger and heavy duty power cord.	<b>\$1,105</b>	B
<b>7400 WD EO</b>	Wired ethernet option. Wired ethernet communication port, fully networked configurable with bulkhead RJ45 connector. Includes software utility for setup and configuration	<b>\$1,245</b>	B
<b>57513-1</b>	Replacement battery pack	<b>\$95</b>	C
<b>7600/4 WD Options</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>7600/4 WD 12DC</b>	External power input 12 or 24 VDC. Specify at time of order, requires external power supply of 12 or 24 VDC	<b>\$925</b>	B
<b>7600/4 WD 220VAC</b>	220/230 VAC Operation	<b>\$925</b>	B
<b>7600/4 WD AB</b>	1 Alarm Buzzer Mounted inside scale or indicator	<b>\$1,050</b>	B
<b>7600/4 WD AO</b>	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	<b>\$1,275</b>	B
<b>7600/4 WD BTH</b>	Blue tooth option. Internal blue tooth transmitter/receiver for com port communication.	<b>\$1,225</b>	B
<b>7600/4 WD DC</b>	Built in rechargeable battery option. 30+ hours of continuous operation with integrated battery charger and heavy duty power cord.	<b>\$1,135</b>	B
<b>7600/4 WD DCR</b>	Four VDC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 32 VDC at 1 Amp	<b>\$1,175</b>	B
<b>7600/4 WD EO</b>	Wired ethernet option. Wired ethernet communication port, fully networked configurable with bulkhead RJ45 connector. Includes software utility for setup and configuration	<b>\$1,275</b>	B

## 7600/4 WD & 7400 WD WASHDOWN WEIGH INDICATOR

<i>7600/4 WD Options</i>			
Part Number	Description	List Price	Price Code
<b>7600/4 WD EO</b>	Wired ethernet option. Wired ethernet communication port, fully networked configurable with bulkhead RJ45 connector. Includes software utility for setup and configuration	<b>\$1,275</b>	B
<b>7600/4 WD HID</b>	Human interface device USB Option. Provides keyboard emulation USB port with USB "A" bulkhead connector	<b>\$1,225</b>	B
<b>7600/4 WD RS</b>	Remote switch input option. Provides remote switch function for Gross/Net, Tare, Zero and Print. Includes 18" color coded cable	<b>\$1,050</b>	B
<b>7600/4 WD SSR</b>	Four 120 VAC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 250 VAC at 1 Amp	<b>\$1,175</b>	B
<b>7600/4 WD USB</b>	USB option. Provides USB comport communications with USB "A" bulkhead connector	<b>\$1,225</b>	B
<b>7600/4 WD WIFI</b>	Wi-Fi option. Wireless ethernet communication with bulkhead mounted antenna, fully networked configurable. Includes software utility for setup and configuration	<b>\$1,325</b>	B
<b>57513-1</b>	Replacement battery pack	<b>\$95</b>	C
<b>DT2PRINTER-2</b>	2" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL below (Not Washdown, wipe down only)	<b>\$495</b>	C
<b>DT4PRINTER-2</b>	4" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL below (Not Washdown, wipe down only)	<b>\$525</b>	C
<b>DTR2PRINTER-2</b>	2" Direct thermal receipt printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL below (Not Washdown, wipe down only)	<b>\$295</b>	C
<b>CUSTLABEL</b>	Custom Label Programming. Design and set up of custom label for a plug and play system. See custom label worksheet on page 72 - 74	<b>\$195</b>	C
<b>Specials</b>	Special Applications are available for this model. Contact us to discuss your unique application requirements so we can develop a great solution for you	<b>Contact Factory</b>	

# 7800 SERIES TOUCHSCREEN COUNT WEIGH INDICATOR

## Standard Features

- Heavy-duty die cast Aluminum enclosure with SS “U” mounting bracket
- Clean, convenient design with bright, stable full-color display and touchscreen
- Full alpha-numeric QWERTY keyboard for easy entry of scale data points
- Check weighing and Setpoint relay operation
- 750 SKU/Product ID Database to store and recall by alphanumeric Part#, Description, Piece Weight, Tare Weight, 3 user-defined Fields, Over/Under Check weigh Settings, Setpoint/Relay Target settings
- Adaptive changes to show units of measurement, including lb., kg, g, oz t, lb. t, gr, dwt, oz, c, oz f, l, ml, tons and lb. - oz
- Single or optional dual base-counting and weighing
- Multiple count modes and Auto Sample Update and percent-of error/accuracy display
- Fast one-step or two-step counting
- Two powerful and flexible standard serial ports, optional EtherNet/IP, Wired Ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth
- Four Year Limited Warranty

## Specifications:

- Power AC line voltages 115/230 VAC, 50/60 Hz (Specify when ordering)
- Power Consumption 0.25A at 115 VAC, 0.13A at 230 VAC
- Circuit Protection RFI, EMI, ESD Protection ADC shielded
- Display: 800 X 320 dot resolution, and 4.6” full-color LCD display with resistive touch panel
- Indications for Gross, Net, Tare, Count, Piece Weight, % Accuracy, Check Weigh Over/Under/Accept, Setpoint Status, Active ID and Base 2
- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Internal Resolution 1/8,000,000
- Displayed Resolution. Standard 1/10,000. Up to 1/50,000
- 5 VDC excitation to power up to 12, 350 ohm load cells
- Dimensions 8” H X 11” W X 3” D
- Four Year Limited Warranty
- Legal for trade NTEP COC 97-009A5
- Shipping Information: 18” X 11” X 8” Carton 7 lbs. with Battery Option 12 lbs.



## Options:

- **New! Ethernet IP**
- Second base input
- Printers for label, barcode label or receipt printing
- Barcode scanner
- Upgraded Internal Product DB to 3000 entries
- External power input 12 or 24 VDC.
- 1 alarm buzzer mounted inside scale or indicator
- Ball-top transfer plate and roller conveyor
- Setpoint/relays DC or AC
- Alarm stack lights and buzzer
- Communications EtherNet/IP, Wired Ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth®
- Analog output, 4-20ma or 0-10vdc
- Custom engineering for unique applications

Scan or Click the QR Codes for detailed product information



[7800 Product Video](#)



[7800 Web Page](#)



[7800 Product Literature](#)



# 7800 SERIES TOUCHSCREEN COUNT WEIGH INDICATOR

<b>7800 Count Weigh Touchscreen Indicator</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>7800</b>	7800 Touchscreen digital weigh and count indicator. Diecast Aluminum enclosure with SS "U" mounting bracket	<b>\$1,195</b>	B
<b>7800 Options</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>7800 EM</b>	Expanded database memory to store and recall 3,000 ID's	<b>\$1,295</b>	B
<b>7800 AB</b>	1 Alarm Buzzer Mounted inside scale or indicator	<b>\$1,320</b>	B
<b>7800 AO</b>	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	<b>\$1,545</b>	B
<b>7800 BC</b>	Heavy duty industrial barcode scanner. Power supplied from scale with convenient bulkhead quick disconnect	<b>\$1,610</b>	B
<b>7800 BTH</b>	Bluetooth option. Internal Bluetooth transmitter/receiver for com port communication.	<b>\$1,495</b>	B
<b>7800 DB</b>	2nd Base Input – for dual base or sample/bulk counting applications	<b>\$1,390</b>	B
<b>7800 DCR</b>	Four VDC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 32 VDC at 1 Amp	<b>\$1,445</b>	B
<b>7800 EIP</b>	EtherNet/IP Communication option. Wired, fully configurable and programable with bulkhead RJ45 connector	<b>\$1,795</b>	B
<b>7800 EO</b>	Wired ethernet option. Wired ethernet communication port, fully networked configurable with bulkhead RJ45 connector. Includes software utility for setup and configuration	<b>\$1,545</b>	B
<b>7800 HID</b>	Human interface device USB Option. Provides keyboard emulation USB port with USB "A" bulkhead connector	<b>\$1,495</b>	B
<b>7800 SLA1</b>	Alarm Stack light 1 Lights, Red and Buzzer Alarm. 2" Diameter, 16" High.	<b>\$1,655</b>	B
<b>7800 SLA2</b>	Alarm Stack light 2 Lights, Red, Green and Buzzer Alarm. 2" Diameter, 18.75" High.	<b>\$1,800</b>	B
<b>7800 SLA3</b>	Alarm Stack light 3 Lights, Red, Green, Yellow and Buzzer Alarm. 2" Dia. 21" High.	<b>\$1,850</b>	B
<b>7800 SSR</b>	Four 120 VAC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 250 VAC at 1 Amp	<b>\$1,445</b>	B
<b>7800 USB</b>	USB option. Provides USB com port communications with USB "A" bulkhead connector	<b>\$1,495</b>	B
<b>7800 WIFI</b>	Wi-Fi option. Wireless ethernet communication with bulkhead mounted antenna, fully networked configurable. Includes software utility for setup and configuration	<b>\$1,395</b>	B
<b>CUSTLABEL</b>	Custom Label Programming. Design and set up of custom label for a plug and play system. See custom label worksheet on page 72	<b>\$195</b>	C
<b>DT2PRINTER-2</b>	2" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above	<b>\$495</b>	C
<b>DT4PRINTER-2</b>	4" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above	<b>\$525</b>	C
<b>DTR2PRINTER-2</b>	2" Direct thermal receipt printer. Includes 6' scale to printer cable.	<b>\$295</b>	C
<b>PSCRD2.4</b>	Mini Remote Display with 2.4" LED Digits. Display Count or Weight. Includes 10' of serial interface cable	<b>\$695</b>	C
<b>PSCRD4.7</b>	Remote Display with Visor with 4.7 LED Digits. Display weight with GROSS/NET/TARE Indicators	<b>\$1,250</b>	C
<b>CALCERT1</b>	Statement of Accuracy Certificate	<b>\$20</b>	C



# 7600/4 & 7500/4 COUNT WEIGH INDICATOR

## Standard Features

- Heavy-duty die cast Aluminum and SS construction
- Clean, convenient design with bright, Red LED display
- 7600/4 With full functions with Sample, Zero, Tare, Keypad Tare, Gross/Net, Piece Weight, Print, Base and Units
- 7500/4 With simplified operation, Zero, Sample Set, Units and Print buttons
- Two units of measurement, including lb., kg, g, oz t, lb. t, gr, dwt, oz, c, oz f, l, ml, tons and lb. - oz
- Single or 7600/4 optional dual base-counting and weighing
- Multiple count modes and Auto Sample Update and percent-of error/accuracy display
- Fast one-step or two-step counting
- One powerful and flexible standard serial ports, optional wired ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth
- Four-year limited warranty

## Specifications:

- Power AC line voltages 115/230 VAC, 50/60 Hz (Specify when ordering)
- Power Consumption 0.25A at 115 VAC, 0.13A at 230 VAC
- Circuit Protection RFI, EMI, ESD Protection ADC shielded
- Display: .56 LED Red, bright, stable and easy to read
- Indications for Gross, Net, Tare, Count, Piece Weight, % Accuracy, and Base 2
- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Internal Resolution 1/8,000,000
- Displayed Resolution. Standard 1/10,000. Up to 1/50,000
- 5 VDC excitation to power up to 12, 350-ohm load cells
- Dimensions 8" H X 11" W X 3" D
- Warranty 4 Year Limited Warranty
- Legal for trade NTEP COC 91-149A7
- Measurement Canada COC AM-4869 Rev. 3
- Shipping Information: 18" X 11" X 8" Carton 7 lbs. with Battery Option 12 lbs.



## Options:

- Second base input (7600/4 only)
- Battery AC operation, built-in re-chargeable system, 30+ hours of operation
- Printers for label, barcode label, ticket or receipt printing (7600/4 only)
- External power input 12 or 24 VDC.
- 220/230 VAC operation
- 1 alarm buzzer mounted inside scale or indicator (7600/4 only)
- Setpoint/relays DC or AC (7600/4 only)
- Alarm stack lights and buzzer (7600/4 only)
- Communications Wired Ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth® (7600/4 only)
- Analog output, 4-20ma or 0-10vdc
- Custom engineering for unique applications

Scan or Click the QR Codes for detailed product information

[7500/4 7600/4 Web Page](#)

[7500/4 7600/4 Product Literature](#)



## 7600/4 & 7500/4 COUNT WEIGH INDICATOR

<b>7500/4 &amp; 7600/4 Weigh/Count Indicator</b>			
Part Number	Description	List Price	Price Code
<b>7500/4</b>	7500/4 Count Weigh Indicator. Dust tight Stainless-Steel Enclosure	<b>\$795</b>	A/B
<b>7600/4</b>	7600/4 Count Weigh Indicator. Dust tight Stainless-Steel Enclosure	<b>\$845</b>	A/B
<b>7600/4 PM</b>	7600/4 Count Weigh Indicator. Panel mount enclosure	<b>\$945</b>	A/B
<b>7500/4 Options</b>			
Part Number	Description	List Price	Price Code
<b>7500/4 12DC</b>	External power input 12 or 24 VDC. Specify at time of order, requires external power supply of 12 or 24 VDC	<b>\$795</b>	B
<b>7500/4 220VAC</b>	220/230 VAC Operation	<b>\$795</b>	B
<b>7500/4 AO</b>	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	<b>\$1,145</b>	B
<b>7500/4 DC</b>	Built in rechargeable battery option. 30+ hours of continuous operation with integrated battery charger and heavy duty power cord.	<b>\$1,005</b>	B
<b>57513-1</b>	Replacement battery pack	<b>\$95</b>	C
<b>7600/4 Options</b>			
Part Number	Description	List Price	Price Code
<b>7600/4 12DC</b>	External power input 12 or 24 VDC. Specify at time of order, requires external power supply of 12 or 24 VDC	<b>\$845</b>	B
<b>7600/4 220VAC</b>	220/230 VAC Operation	<b>\$845</b>	B
<b>7600/4 AB</b>	1 Alarm Buzzer Mounted inside scale or indicator	<b>\$970</b>	B
<b>7600/4 AO</b>	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	<b>\$1,195</b>	B
<b>7600/4 BTH</b>	Blue tooth option. Internal blue tooth transmitter/receiver for com port communication.	<b>\$1,145</b>	B
<b>7600/4 DB</b>	2nd Base Input – for dual base or sample/bulk counting applications	<b>\$1,040</b>	B
<b>7600/4 DC</b>	Built in rechargeable battery option. 30+ hours of continuous operation with integrated battery charger and heavy duty power cord.	<b>\$1,055</b>	B
<b>7600/4 DCR</b>	Four VDC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 32 VDC at 1 Amp	<b>\$1,095</b>	B
<b>7600/4 EO</b>	Wired ethernet option. Wired ethernet communication port, fully networked configurable with bulkhead RJ45 connector. Includes software utility for setup and configuration	<b>\$1,195</b>	B
<b>7600/4 HID</b>	Human interface device USB Option. Provides keyboard emulation USB port with USB "A" bulkhead connector	<b>\$1,065</b>	B
<b>7600/4 RS</b>	Remote switch input option. Provides remote switch function for Gross/Net, Tare, Zero and Print. Includes 18" color coded cable	<b>\$970</b>	B
<b>7600/4 SLA1</b>	Alarm Stack light 1 Lights, Red and Buzzer Alarm. 2" Diameter, 16" High.	<b>\$1,305</b>	B
<b>7600/4 SLA2</b>	Alarm Stack light 2 Lights, Red, Green and Buzzer Alarm. 2" Diameter, 18.75" High.	<b>\$1,355</b>	B
<b>7600/4 SLA3</b>	Alarm Stack light 3 Lights, Red, Green, Yellow and Buzzer Alarm. 2" Dia. 21" High.	<b>\$1,405</b>	B

## 7600/4 & 7500/4 COUNT WEIGH INDICATOR

<i>7600/4 Options</i>			
Part Number	Description	List Price	Price Code
<b>7600/4 SSR</b>	Four 120 VAC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 250 VAC at 1 amp	<b>\$1,095</b>	B
<b>7600/4 USB</b>	USB option. Provides USB comport communications with USB "A" bulkhead connector	<b>\$1,145</b>	B
<b>7600/4 WIFI</b>	Wi-Fi option. Wireless ethernet communication with bulkhead mounted antenna, fully networked configurable. Includes software utility for setup and configuration	<b>\$1,245</b>	B
<b>57513-1</b>	Replacement battery pack	<b>\$95</b>	C
<b>DT2PRINTER-2</b>	2" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL below (Not Washdown, wipe down only)	<b>\$495</b>	C
<b>DT4PRINTER-2</b>	4" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL below (Not Washdown, wipe down only)	<b>\$525</b>	C
<b>DTR2PRINTER-2</b>	2" Direct thermal receipt printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL below (Not Washdown, wipe down only)	<b>\$295</b>	C
<b>CUSTLABEL</b>	Custom Label Programming. Design and set up of custom label for a plug and play system. See custom label worksheet on page 72 - 74	<b>\$195</b>	C
<b>PSCRD2.4</b>	Mini Remote Display with 2.4" LED Digits. Display Count or Weight. Includes 10' of serial interface cable	<b>\$695</b>	C
<b>PSCRD4.7</b>	Remote Display with Visor with 4.7 LED Digits. Display weight with GROSS/NET/TARE Indicators	<b>\$1,250</b>	C
<b>Specials</b>	Special Applications are available for this model. Contact us to discuss your unique application requirements so we can develop a great solution for you	<b>Contact Factory</b>	



**FOR ADVANCED INDICATOR APPLICATIONS, WHY NOT UPGRADE?  
7800 SERIES TOUCHSCREEN COUNT WEIGH Indicator  
Details on Page 31 - 33**



# 7400 7600E WEIGHT INDICATORS

## Standard Features

- Heavy-duty 304 Stainless Steel Enclosure and “U” mounting bracket
- Clean, convenient design with bright, Red LED display
- Utilizes “Condec” style calibration and configuration firmware
- 7600E With full functions with Start/Stop, Zero, Tare, Keypad Tare, Gross/Net, Piece Weight, Print, Base and Units
- 7400 With simplified operation, Zero, Gross/Net, Tare, Units and Print buttons
- Two units of measurement, including lb. & kg.
- Truck IN/OUT with storage for up to 300 Tare Weights by numeric I.D. (7600E only)
- 10-point Linearization for easy set-up and calibration and adjusting linearity where required.
- Standard RS-232 port and optional wired ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth
- Four-year limited warranty

## Specifications:

- Power 5VDC
- Power Consumption 0.25A at 115 VAC, 0.13A at 230 VAC
- Circuit Protection RFI, EMI, ESD Protection ADC shielded
- Display: .56 LED Red, bright, stable and easy to read
- Indications for Gross, Net, Tare and Base 2
- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Internal Resolution 1/8,000,000
- Displayed Resolution. Standard 1/10,000. Up to 1/50,000
- 5 VDC excitation to power up to 12, 350-ohm load cells
- Dimensions 8” H X 11” W X 3” D
- Four Year Limited Warranty
- Legal for trade NTEP COC 91-149A7
- Measurement Canada COC AM-4869 Rev. 3
- Shipping Information: 18” X 11” X 8” Carton 7 lbs. with Battery Option 12 lbs.



## Options:

- Second base input (7600E only)
- Battery AC operation, built-in re-chargeable system, 30+ hours of operation
- External power input 12 or 24 VDC.
- 220/230 VAC operation
- Setpoint/relays DC or AC (7600E only)
- Communications Wired Ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth® (7600/4 only)
- Analog output, 4-20ma or 0-10vdc
- Custom engineering for unique applications

Scan or Click the QR Codes for detailed product information

[7400 Product Literature](#)



[7600E Product Literature](#)





# 7400 7600E WEIGHT INDICATORS

<b>7400 &amp; 7600E Weigh Indicator</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>7400</b>	7400 Weigh Indicator. Dust Tight enclosure	<b>\$870</b>	A/B
<b>7600E</b>	7600E Weigh Indicator. Dust Tight enclosure	<b>\$920</b>	A/B
<b>7400EW</b>	7400 Count Weigh Indicator. Panel Mount enclosure	<b>\$1,045</b>	A/B
<b>7600EW</b>	7600E Weigh Indicator. Panel Mount enclosure	<b>\$1,095</b>	A/B
<b>7400 Options</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>7400 12DC</b>	External power input 12 or 24 VDC. Specify at time of order, requires external power supply of 12 or 24 VDC	<b>\$870</b>	B
<b>7400 220VAC</b>	220/230 VAC Operation	<b>\$870</b>	B
<b>7400 AO</b>	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	<b>\$1,220</b>	B
<b>7400 DC</b>	Built in rechargeable battery option. 30+ hours of continuous operation with integrated battery charger and heavy duty power cord.	<b>\$1,080</b>	B
<b>7400 EO</b>	Wired ethernet option. Wired ethernet communication port, fully networked configurable with bulkhead RJ45 connector. Includes software utility for setup and configuration	<b>\$1,220</b>	B
<b>57513-1</b>	Replacement battery pack	<b>\$95</b>	C
<b>7600E Options</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>7600E 12DC</b>	External power input 12 or 24 VDC. Specify at time of order, requires external power supply of 12 or 24 VDC	<b>\$920</b>	B
<b>7600E 220VAC</b>	220/230 VAC Operation	<b>\$920</b>	B
<b>7600E AO</b>	Analog output option. Jumper select for 0 - 10 VDC or 4 - 20ma (Specify when ordering) output via two conductor cable.	<b>\$1,270</b>	B
<b>7600E BTH</b>	Blue tooth option. Internal blue tooth transmitter/receiver for com port communication.	<b>\$1,220</b>	B
<b>7600E DC</b>	Built in rechargeable battery option. 30+ hours of continuous operation with integrated battery charger and heavy duty power cord.	<b>\$1,130</b>	B
<b>7600E DCR</b>	Four VDC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 32 VDC at 1 Amp	<b>\$1,170</b>	B
<b>7600E EO</b>	Wired ethernet option. Wired ethernet communication port, fully networked configurable with bulkhead RJ45 connector. Includes software utility for setup and configuration	<b>\$1,270</b>	B
<b>7600E HID</b>	Human interface device USB Option. Provides keyboard emulation USB port with USB "A" bulkhead connector	\$1,220	B
<b>7600E RS</b>	Remote switch input option. Provides remote switch function for Gross/Net, Tare, Zero and Print. Includes 18" color coded cable	\$1,045	B
<b>7600E SSR</b>	Four 120 VAC, 2-amp Setpoint/Relays and I/O that may be programed for use with Count or Weight values. Up to 250 VAC at 1 Amp	\$1,170	B
<b>7600E USB</b>	USB option. Provides USB com port communications with USB "A" bulkhead connector	\$1,220	B
<b>7600E WIFI</b>	Wi-Fi option. Wireless ethernet communication with bulkhead mounted antenna, fully networked configurable. Includes software utility for setup and configuration	\$1,320	B

# 7400/7500/7600 EXP WEIGHT INDICATORS

## Standard Features

- Die cast aluminum compact enclosure with SS U-bracket for desk or wall mount
- Clean, convenient design with bright, Red LED display
- 5 VDC power, includes AC adaptor, 8' cable or can be portable with standard off the shelf USB power pack
- 7600EXP With full functions with Sample Set, Zero, Tare, Keypad Tare, Gross/Net, Piece Weight, Print, Base and Units
- 7500EXP With simplified operation, Zero, Sample Set, Units and Print buttons
- 7400 With simplified operation, Zero, Gross/Net, Tare, Units and Print buttons
- Two units of measurement.
- USB for both power and data (USB 1.0 or higher)

## Specifications:

- Power 5 VDC 0.25 amp
- Circuit Protection RFI, EMI, ESD Protection ADC shielded
- Display: .56 LED Red, bright, stable and easy to read
- Indications for Gross, Net, Tare, Count, Piece Weight, % Accuracy
- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Internal Resolution 1/8,000,000
- Displayed Resolution. Standard 1/10,000. Up to 1/50,000
- 5 VDC excitation to power up to 4, 350-ohm load cells
- One Year Limited Warranty
- Legal for trade NTEP COC 91-149A7
- Measurement Canada COC AM-4869 Rev. 3



7400 7500 & 7600EXP Weigh Indicator			
Part Number	Description	List Price	Price Code
7400EXP	7400EXP Weigh Only Indicator, 10 Point Linearization with Black Texture Powder Coated Aluminum Die Cast Enclosure - 9" (W) x 4" (H) x 3.75" (D) with U-Bracket Installed	\$575	A/B
7500EXP	7500EXP Count Weigh Indicator, Simplified Operation in (2) User Programmable Weight Units and Count Feature with Black Texture Powder Coated Aluminum Die Cast Enclosure - 9" (W) x 4" (H) x 3.75" (D) on U-Bracket Stand with Knobs	\$575	A/B
7600EXP	7600EXP Count Weigh Indicator, Expanded Features, Full Keyboard Entry of Tare Weight, APW, Sample Quantity(Plus 4 Pre-set Sample Sizes) and Operational Options with Black Texture Powder Coated Aluminum Die Cast Enclosure - 9" (W) x 4" (H) x 3.75" (D) with U-Bracket Installed	\$595	A/B



Scan or Click the QR Codes for detailed product information

[7400/7500/7600EXP Web Page](#)

[7400/7500/7600EXP Product Literature](#)



# M6400 & SS6400 BASE

## Standard Features

- Industrial rugged design with tube steel frame and heavy gauge platform cover
- MS units with durable Powder Coated finish, SS units 304 grade SS and platform cover with #3 finish
- SS models IP68 washdown and easy to clean hygienic design
- 10' cable for indicator connection. Standard CPC quick disconnect for use with all Pennsylvania Scale indicators
- Single point design with high performance and rugged 1260 profile load cell for extremely accurate weigh or counting applications
- Four-year limited warranty



## Specifications:

- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Dimensions 12" X 12", 18" X 18", 18" X 24" and 24" X 24"
- Full scale output 2 mV/V +/- 10%
- Recommended supply voltage 5-12 VDC
- Four Year Limited Warranty
- Legal for trade NTEP COC 90-161A2
- Measurement Canada COC AM-4714 Rev. 4
- Shipping Information: M6400-1818-XXX, 10" X 22" X 24", 64 lbs. M6400-1824-XXX, 10" X 24" X 27" 70 lbs. M6400-2424-XXX, 10" X 28" X 30", 78 lbs.

## Options:

- Stainless steel platform cover in place of powder coated steel cover
- Ball-top transfer plate and roller conveyor
- Columns
- Base stands and tables
- Mobility kit
- Extended load cell cable
- Custom engineering for unique applications

Scan or Click the QR Codes for detailed product information

[6400 Web Page](#)



[6400 Product Literature](#)



# M6400 BASE

M6400 Base, Powder Coated Mild Steel				
Part Number	Capacity lbs. / kg.	Base Size	List Price	Price Code
M6400-1212-100*	100 lbs. / 45.36 kg	12" X 12" - 5" High	\$950	A/B
M6400-1212-250*	250 lbs. / 115 kg	12" X 12" - 5" High	\$950	A/B
M6400-1212-500*	500 lbs. / 250 kg	12" X 12" - 5" High	\$950	A/B
M6400-1212-1K*	1,000 lbs. / 500 kg	12" X 12" - 5" High	\$950	A/B
M6400-1818-100	100 lbs. / 45.36 kg	18" X 18" - 5" High	\$895	A/B
M6400-1818-250	250 lbs. / 115 kg	18" X 18" - 5" High	\$895	A/B
M6400-1818-500	500 lbs. / 250 kg	18" X 18" - 5" High	\$895	A/B
M6400-1818-1K	1,000 lbs. / 500 kg	18" X 18" - 5" High	\$895	A/B
M6400-1824-100	100 lbs. / 45.36 kg	18" X 24" - 5" High	\$950	A/B
M6400-1824-250	250 lbs. / 115 kg	18" X 24" - 5" High	\$950	A/B
M6400-1824-500	500 lbs. / 250 kg	18" X 24" - 5" High	\$950	A/B
M6400-1824-1K	1,000 lbs. / 500 kg	18" X 24" - 5" High	\$950	A/B
M6400-2424-100	100 lbs. / 45.36 kg	24" X 24" - 5" High	\$1,050	A/B
M6400-2424-250	250 lbs. / 115 kg	24" X 24" - 5" High	\$1,050	A/B
M6400-2424-500	500 lbs. / 250 kg	24" X 24" - 5" High	\$1,050	A/B
M6400-2424-1K	1,000 lbs. / 500 kg	24" X 24" - 5" High	\$1,050	A/B
M6400-2430-500*	500 lbs. / 250 kg	24" X 30" - 5" High	\$1,350	A/B
M6400-2430-1K*	1,000 lbs. / 500 kg	24" X 30" - 5" High	\$1,350	A/B
Factory Calibration - Factory matching when ordered with any Pennsylvania host counting scale (7600 DB) or digital indicator as a system at N/C				
* Not Legal For Trade				
<b>Options - Note "XXX" = capacity</b>				
Part Number	Description	List Price	Price Code	
M6400-1818-XXX SSP	304 Stainless steel platform cover in place of steel powder coated 18" X 18" Base	\$1,245	B	
M6400-1824-XXX SSP	304 Stainless steel platform cover in place of steel powder coated 18" X 24" Base	\$1,350	B	
M6400-2424-XXX SSP	304 Stainless steel platform cover in place of steel powder coated 24" X 24" Base	\$1,450	B	
M6400-1818-XXX BT	Ball top transfer plate option. 6400 Base with 18" X 18" ball top transfer plate. 25, 1.5" balls with 4.5" center to center spacing.	\$1,470	B	
M6400-1824-XXX BT	Ball top transfer plate option. 6400 Base with 18" X 24" ball top transfer plate. 24, 1.5" balls with 4.5" center to center spacing.	\$1,525	B	
M6400-2424-XXX BT	Ball top transfer plate option. 6400 Base with 24" X 24" ball top transfer plate. 33, 1.5" balls with 4.5" center to center spacing.	\$1,645	B	

FM/IS CONFIGURATIONS ARE AVAILABLE, PLEASE CONTACT THE FACTORY FOR DETAILS AND QUOTATION



# M6400 BASE

Options - Note "XXX" = capacity			
Part Number	Description	List Price	Price Code
<b>M6400-2430-XXX BT</b>	6400 Base with 24" X 30" ball top transfer plate. 38, 1.5" balls with 4.5" center to center spacing.	<b>\$1,900</b>	B
<b>M6400-1818-XXX RT3</b>	Roller Conveyor Option for 6400 18" X 18" Base. High strength Aluminum, 2.75"(H) X 18"(D) X 18" (W). 1.25" Rollers with 3" Spacing	<b>\$1,320</b>	B
<b>M6400-1818-XXX RT1</b>	Roller Conveyor Option for 6400 18" X 18" Base. High strength Aluminum, 2.75"(H) X 18"(D) X 18" (W). 1.25" Rollers with 1.5" Spacing	<b>\$1,345</b>	B
<b>M6400-2424-XXX RT3</b>	Roller Conveyor Option for 6400 24" X 24" Base. High strength Aluminum, 2.75"(H) X 24"(D) X 24" (W). 1.25" Rollers with 3" Spacing	<b>\$1,525</b>	B
<b>M6400-2424-XXX RT1</b>	Roller Conveyor Option for 6400 24" X 24" Base. 2.75"(H) X 24"(D) X 24" (W). 1.25" Rollers with 1.5" Spacing	<b>\$1,575</b>	B
<b>56730A</b>	18" Powder coated column, Fits ALL M6400 Base sizes. Includes mounting hardware, cable clamps and bottom mounted leveling foot for extra stability. Top flange mounts ALL Pennsylvania Scale indicators For Counting Scale mount order with 56731-1 below	<b>\$325</b>	C
<b>56731A</b>	36" Powder coated column, Fits ALL M6400 Base sizes. Includes mounting hardware, cable clamps and bottom mounted leveling foot for extra stability. Top flange mounts ALL Pennsylvania Scale indicators For Counting Scale mount order with 56731-1 below	<b>\$375</b>	C
<b>56728-1</b>	38" Powder coated column, mounts to floor. Top Flange fits all indicators in 7X00 series. For Counting Scale mount order with 56731-1 below	<b>\$350</b>	C
<b>56731-1</b>	Scale shelf, mounts to any above column flange fits all 7X00 series bench scales with 25" lip. Ideal for dual base counting system.	<b>\$100</b>	C
<b>56733</b>	Mobility kit for 6400 base. Caster wheels, 2 each locking and swivel. Mounts to any powder coated steel base in place of standard leveling feet. Not suitable for washdown	<b>\$125</b>	C
<b>CALCERT1</b>	Statement of Accuracy Certificate	<b>\$20</b>	C
<b>CALCERT2</b>	NIST Traceable Calibration Certificate	<b>\$85</b>	C



## SS6400 WASHDOWN BASE


SS6400 Base				
Part Number	Capacity lbs. / kg.	Base Size	List Price	Price Code
<b>SS6400-1818-100</b>	100 lbs. / 45.36 kg	18" X 18" - 5" High	<b>\$1,575</b>	B
<b>SS6400-1818-250</b>	250 lbs. / 115 kg	18" X 18" - 5" High	<b>\$1,575</b>	B
<b>SS6400-1818-500</b>	500 lbs. / 250 kg	18" X 18" - 5" High	<b>\$1,575</b>	B
<b>SS6400-1818-1K</b>	1,000 lbs. / 500 kg	18" X 18" - 5" High	<b>\$1,575</b>	B
<b>SS6400-1824-100</b>	100 lbs. / 45.36 kg	18" X 24" - 5" High	<b>\$1,825</b>	B
<b>SS6400-1824-250</b>	250 lbs. / 115 kg	18" X 24" - 5" High	<b>\$1,825</b>	B
<b>SS6400-1824-500</b>	500 lbs. / 250 kg	18" X 24" - 5" High	<b>\$1,825</b>	B
<b>SS6400-1824-1K</b>	1,000 lbs. / 500 kg	18" X 24" - 5" High	<b>\$1,825</b>	B
<b>SS6400-2424-100</b>	100 lbs. / 45.36 kg	24" X 24" - 5" High	<b>\$2,195</b>	B
<b>SS6400-2424-250</b>	250 lbs. / 115 kg	24" X 24" - 5" High	<b>\$2,195</b>	B
<b>SS6400-2424-500</b>	500 lbs. / 250 kg	24" X 24" - 5" High	<b>\$2,195</b>	B
<b>SS6400-2424-1K</b>	1,000 lbs. / 500 kg	24" X 24" - 5" High	<b>\$2,195</b>	B
Factory Calibration - Factory matching when ordered with any Pennsylvania digital indicator as a system at N/C				
Options - Note "XXX" = capacity				
Part Number	Description	List Price	Price Code	
<b>56732A</b>	18" 304 SS Column, Fits ALL SS6400 Base sizes. Includes mounting hardware, cable clamps and bottom mounted leveling foot for extra stability. Top flange mounts ALL Pennsylvania Scale indicators.	<b>\$415</b>	C	
<b>56737A</b>	36" 304 SS Column, Fits ALL SS6400 Base sizes. Includes mounting hardware, cable clamps and bottom mounted leveling foot for extra stability. Top flange mounts ALL Pennsylvania Scale indicators.	<b>\$465</b>	C	
<b>56778-1S</b>	304 SS Heavy duty table for SS6400 18" X 18" Base. 36" tall with brackets to hold the base securely. Leveling feet provide +/- 1" adjustment.	<b>\$1,795</b>	C	
<b>56778-2S</b>	304 SS Heavy duty table for SS6400 24" X 24" Base. 36" tall with brackets to hold the base securely. Leveling feet provide +/- 1" adjustment.	<b>\$1,895</b>	C	
<b>SS6400-1818-XXX RT3</b>	Roller Conveyor Option for SS6400 18" X 18" Base. Stainless Steel, 2.75"(H) X 18"(D) X 18" (W). 1.25" Rollers with 3" Spacing	<b>Contact Factory</b>		
<b>SS6400-2424-XXX RT3</b>	Roller Conveyor Option for SS6400 24" X 24" Base. Stainless Steel, 2.75"(H) X 18"(D) X 18" (W). 1.25" Rollers with 3" Spacing	<b>Contact Factory</b>		

**FM/IS CONFIGURATIONS ARE AVAILABLE, PLEASE CONTACT THE FACTORY FOR DETAILS AND QUOTATION**

# SS6600 MAX-LT BASE

## Standard Features

- Hygienic and super heavy duty industrial design with a solid bar frame and rugged deck plate
- Unique gas charged struck design allows for easy lift of deckplate for cleaning
- Standard Shot blast finish for additional anti slip protection when wet
- IP69K washdown protection, all 304 SS material, welded seal load cells, hardware and Nema 4X summing card j-box
- High performance load cells and summing card to provide outstanding accuracy for demanding weight applications.
- 20' cable load cell cable for easy connection to all Pennsylvania Scale indicators and to digital indicator or counting scale with dual base option
- 100% + Overload Protection
- Proudly made in the USA with the quality, dependability and performance you need for outstanding weighing performance!

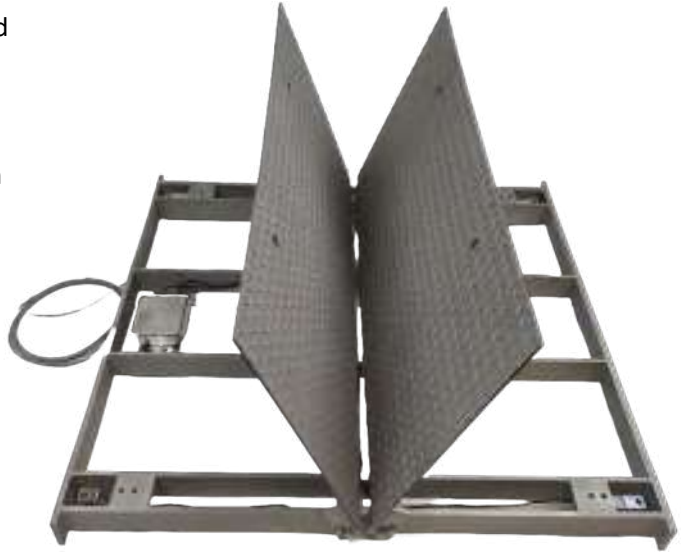

## Specifications:

- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Dimensions available in 36" X 36" to 60" X 60" and larger
- Available in 1K, 2K, 5K and 10K Capacities
- Full scale output 2 mV/V or 3 mV/V +/- 10%
- Recommended supply voltage 5-12 VDC
- Two Year Limited Warranty

## Options:

- Diamond Plate Deck Plate
- FM/IS configuration
- Custom sizes and applications
- Floor mount columns
- 7400 WD or 7600/4 WD IP66K Washdown Indicator
- Ramps and Pit Frames

Scan or Click the QR Codes for detailed product information

[SS6600 MAX-LT Web Page](#)

[SS6600 MAX-LT Product Literature](#)

[SS6600 MAX-LT Video](#)



# SS6600 MAX-LT BASE

SS6600 MAX Lift Top Base with Standard, Shot Blast Finish Smooth Deck Plate				
Part Number	Capacity Lbs.	Base Size	List Price	Price Code
SS6600-3636-1K MAX	1,000	36" X 36" X 4.5"	\$11,795	B
SS6600-3636-2K MAX	2,000	36" X 36" X 4.5"	\$11,795	B
SS6600-3636-5K MAX	5,000	36" X 36" X 4.5"	\$11,795	B
SS6600-4848-1K MAX	1,000	48" x 48" x 4.5"	\$12,595	B
SS6600-4848-2K MAX	2,000	48" x 48" x 4.5"	\$12,595	B
SS6600-4848-5K MAX	5,000	48" x 48" x 4.5"	\$12,595	B
SS6600-4848-10K MAX	10,000	48" x 48" x 4.5"	\$12,595	B
SS6600-6060-1K MAX	1,000	60" x 60" x 4.5"	\$17,495	B
SS6600-6060-2K MAX	2,000	60" x 60" x 4.5"	\$17,495	B
SS6600-6060-5K MAX	5,000	60" x 60" x 4.5"	\$17,495	B
SS6600-6060-10K MAX	10,000	60" x 60" x 4.5"	\$17,495	B
SS6600 MAX Lift Top Base with Optional Shot Blast Finish Diamond Plate Deck				
Part Number	Capacity Lbs.	Base Size	List Price	Price Code
SS6600-3636-1KD MAX	1,000	36" X 36" X 4.5"	\$12,695	B
SS6600-3636-2KD MAX	2,000	36" X 36" X 4.5"	\$12,695	B
SS6600-3636-5KD MAX	5,000	36" X 36" X 4.5"	\$12,695	B
SS6600-4848-1KD MAX	1,000	48" x 48" x 4.5"	\$13,495	B
SS6600-4848-2KD MAX	2,000	48" x 48" x 4.5"	\$13,495	B
SS6600-4848-5KD MAX	5,000	48" x 48" x 4.5"	\$13,495	B
SS6600-4848-10KD MAX	10,000	48" x 48" x 4.5"	\$13,495	B
SS6600-6060-1KD MAX	1,000	60" x 60" x 4.5"	\$18,895	B
SS6600-6060-2KD MAX	2,000	60" x 60" x 4.5"	\$18,895	B
SS6600-6060-5KD MAX	5,000	60" x 60" x 4.5"	\$18,895	B
SS6600-6060-10KD MAX	10,000	60" x 60" x 4.5"	\$18,895	B
SS6600 MAX Washdown Base Options				
Stainless Steel Pit Frames				
Part Number	Description		List Price	Price Code
57599-4MAX	Fits 48" X 48", 1K, 2K, 5K, or 10K Capacity Bases		\$2,395	C
57599-5MAX	Fits 60" X 60", 1K, 2K, 5K, or 10K Capacity Bases		\$2,595	C
Stainless Steel Ramps				
Part Number	Description		List Price	Price Code
57599-4MAX	Ramps for SS 6600 MAX 48" X 48" X 4.5", Up to 10K		\$4,595	C
57599-5MAX	Ramps for SS 6600 MAX 60" X 60" X 4.5", Up to 10K		\$4,995	C

FM/IS CONFIGURATIONS ARE AVAILABLE, PLEASE CONTACT THE FACTORY FOR DETAILS AND QUOTATION



# M6600 & SS6600 BASE

## Standard Features

- Super heavy duty industrial design with a full tube steel frame and rugged deck plate
- MS models with diamond plate deck and Powder Coated or Epoxy Painted Finish
- SS Models are IP68 washdown protection, all 304 SS material, load cells, hardware and come with a remote SS Nema 4X summing card j-box
- High performance load cells and summing card to provide outstanding accuracy for weight or count applications.
- 20' cable with CPC quick disconnect for easy connection to all Pennsylvania Scale indicators and counting scales with dual base option
- 100% + Overload Protection
- Proudly made in the USA with the quality, dependability and performance you need for outstanding weighing performance!



## Specifications:

- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Dimensions available in 18" X 24" to 120" X 120" and larger
- Full scale output 2 mV/V or 3 mV/V +/- 10%
- Recommended supply voltage 5-12 VDC
- Five Year Limited Warranty
- Legal for trade NTEP COC 90-097A3
- Measurement Canada COC S.WA-4456 Rev. 3 Rev. 4
- Shipping Information: M6600-4848-5K, (1K, 2K & 10K), 48" X 48" X 9", 290 lbs.

## Options:

- MS and SS ramps
- MS and SS pit frames
- MS and SS bumper guards
- MS and SS forklift frames
- Load cell upgrade to SS environmentally sealed or hermetically sealed
- Top access summing card j-box
- FM/IS configuration
- Custom sizes and applications
- Floor or base mount columns

Scan or Click the QR Codes for detailed product information

[6600 Web Page](#)



[6600 Product Literature](#)



# M6600 BASE

Part Number	Capacity Lbs.	Description	Base Size	List Price	Price Code
M6600-2424-1K	1,000	Powder Coated Finish	24" X 24" - 3" High	\$1,850	A/B
M6600-2424-2K	2,000	Powder Coated Finish	24" X 24" - 3" High	\$1,850	A/B
M6600-2424-5K	5,000	Powder Coated Finish	24" X 24" - 3" High	\$1,850	A/B
M6600-3030-1K	1,000	Powder Coated Finish	30" X 30" - 3" High	\$1,850	A/B
M6600-3030-2K	2,000	Powder Coated Finish	30" X 30" - 3" High	\$1,850	A/B
M6600-3030-5K	5,000	Powder Coated Finish	30" X 30" - 3" High	\$1,850	A/B
M6600-3636-1K	1,000	Powder Coated Finish	36" X 36" - 3" High	\$1,850	A/B
M6600-3636-2K	2,000	Powder Coated Finish	36" X 36" - 3" High	\$1,850	A/B
M6600-3636-5K	5,000	Powder Coated Finish	36" X 36" - 3" High	\$1,850	A/B
M6600-3636-10K	10,000	Powder Coated Finish	36" X 36" - 3" High	\$1,850	A/B
M6600-3648-1K	1,000	Powder Coated Finish	36" X 48" - 3" High	\$1,850	A/B
M6600-3648-2K	2,000	Powder Coated Finish	36" X 48" - 3" High	\$1,850	A/B
M6600-3648-5K	5,000	Powder Coated Finish	36" X 48" - 3" High	\$1,850	A/B
M6600-3648-10K	10,000	Powder Coated Finish	36" X 48" - 3" High	\$1,850	A/B
M6600-4848-1K	1,000	Powder Coated Finish	48" X 48" - 3" High	\$1,850	A/B
M6600-4848-2K	2,000	Powder Coated Finish	48" X 48" - 3" High	\$1,850	A/B
M6600-4848-5K	5,000	Powder Coated Finish	48" X 48" - 3" High	\$1,850	A/B
M6600-4848-10K	10,000	Powder Coated Finish	48" X 48" - 3" High	\$1,850	A/B
M6600-4848-20K	20,000	Powder Coated Finish	48" X 48" - 4" High	\$3,795	B
M6600-4848-30K	30,000	Powder Coated Finish	48" X 48" - 5" High	\$4,195	B
M6600-4848-40K	40,000	Powder Coated Finish	48" X 48" - 5" High	\$4,495	B
M6600-4860-5K	5,000	Powder Coated Finish	48" X 60" - 3" High	\$2,195	B
M6600-4860-10K	10,000	Powder Coated Finish	48" X 60" - 3" High	\$2,295	B
M6600-4860-20K	20,000	Powder Coated Finish	48" X 60" - 4" High	<i>Contact For Quote</i>	
M6600-4860-30K	30,000	Powder Coated Finish	48" X 60" - 5" High	<i>Contact For Quote</i>	
M6600-4860-40K	40,000	Powder Coated Finish	48" X 60" - 5" High	<i>Contact For Quote</i>	
M6600-4872-5K	5,000	Powder Coated Finish	48" X 72" - 3" High	\$2,495	B
M6600-4872-10K	10,000	Powder Coated Finish	48" X 72" - 3" High	\$2,595	B
M6600-4872-20K	20,000	Powder Coated Finish	48" X 72" - 4" High	<i>Contact For Quote</i>	
M6600-4872-30K	30,000	Powder Coated Finish	48" X 72" - 5" High	<i>Contact For Quote</i>	
M6600-4872-40K	40,000	Powder Coated Finish	48" X 72" - 5" High	<i>Contact For Quote</i>	
M6600-4884-5K	5,000	Epoxy Paint	48" X 84" - 3" High	<i>Contact For Quote</i>	
M6600-4884-10K	10,000	Epoxy Paint	48" X 84" - 4" High	<i>Contact For Quote</i>	
M6600-4884-20K	20,000	Epoxy Paint	48" X 84" - 4" High	<i>Contact For Quote</i>	
M6600-4884-30K	30,000	Epoxy Paint	48" X 84" - 5" High	<i>Contact For Quote</i>	
M6600-4884-40K	40,000	Epoxy Paint	48" X 84" - 5" High	<i>Contact For Quote</i>	
M6600-4896-5K	5,000	Epoxy Paint	48" X 96" - 4" High	<i>Contact For Quote</i>	
M6600-4896-10K	10,000	Epoxy Paint	48" X 96" - 4" High	<i>Contact For Quote</i>	
M6600-4896-20K	20,000	Epoxy Paint	48" X 96" - 4" High	<i>Contact For Quote</i>	
M6600-4896-30K	30,000	Epoxy Paint	48" X 96" - 5" High	<i>Contact For Quote</i>	
M6600-4896-40K	40,000	Epoxy Paint	48" X 96" - 5" High	<i>Contact For Quote</i>	
M6600-48120-5K	5,000	Epoxy Paint	48" X 120" - 4" High	<i>Contact For Quote</i>	
M6600-48120-10K	10,000	Epoxy Paint	48" X 120" - 4" High	<i>Contact For Quote</i>	
M6600-48120-20K	20,000	Epoxy Paint	48" X 120" - 5" High	<i>Contact For Quote</i>	
M6600-48120-30K	30,000	Epoxy Paint	48" X 120" - 5" High	<i>Contact For Quote</i>	
M6600-48120-40K	40,000	Epoxy Paint	48" X 120" - 5" High	<i>Contact For Quote</i>	

FM/IS CONFIGURATIONS ARE AVAILABLE, PLEASE CONTACT THE FACTORY FOR DETAILS AND QUOTATION





# M6600 BASE

M6600 Base					
Part Number	Capacity Lbs.	Description	Base Size	List Price	Price Code
M6600-6060-5K	5,000	Powder Coated Finish	60" X 60" - 3" High	\$3,095	A/B
M6600-6060-10K	10,000	Powder Coated Finish	60" X 60" - 3" High	\$3,495	A/B
M6600-6060-20K	20,000	Powder Coated Finish	60" X 60" - 4" High	\$4,695	A/B
M6600-6060-30K	30,000	Epoxy Paint	60" X 60" - 5" High	<i>Contact For Quote</i>	
M6600-6060-40K	40,000	Epoxy Paint	60" X 60" - 5" High	<i>Contact For Quote</i>	
M6600-6072-5K	5,000	Epoxy Paint	60" X 72" - 3" High	<i>Contact For Quote</i>	
M6600-84108-5K	5,000	Epoxy Paint	84" X 108" - 4" High	<i>Contact For Quote</i>	
M6600-84108-10K	10,000	Epoxy Paint	84" X 108" - 4" High	<i>Contact For Quote</i>	
M6600-84108-20K	20,000	Epoxy Paint	84" X 108" - 5" High	<i>Contact For Quote</i>	
M6600-84108-30K	30,000	Epoxy Paint	84" X 108" - 5" High	<i>Contact For Quote</i>	
M6600-84108-40K	40,000	Epoxy Paint	84" X 108" - 5" High	<i>Contact For Quote</i>	
M6600-84120-5K	5,000	Epoxy Paint	84" X 120" - 4" High	<i>Contact For Quote</i>	
M6600-84120-10K	10,000	Epoxy Paint	84" X 120" - 4" High	<i>Contact For Quote</i>	
M6600-84120-20K	20,000	Epoxy Paint	84" X 120" - 5" High	<i>Contact For Quote</i>	
M6600-84120-30K	30,000	Epoxy Paint	84" X 120" - 5" High	<i>Contact For Quote</i>	
M6600-84120-40K	40,000	Epoxy Paint	84" X 120" - 5" High	<i>Contact For Quote</i>	
M6600-96120-5K	5,000	Epoxy Paint	96" X 120" - 4" High	<i>Contact For Quote</i>	
M6600-96120-10K	10,000	Epoxy Paint	96" X 120" - 4" High	<i>Contact For Quote</i>	
M6600-96120-20K	20,000	Epoxy Paint	96" X 120" - 5" High	<i>Contact For Quote</i>	
M6600-96120-30K	30,000	Epoxy Paint	96" X 120" - 5" High	<i>Contact For Quote</i>	
M6600-96120-40K	40,000	Epoxy Paint	96" X 120" - 5" High	<i>Contact For Quote</i>	
Other sizes and capacities are available. Contact the factory for quotation.					
Factory Calibration - Factory matching when ordered with any Pennsylvania host counting scale (7600 DB) or digital indicator as a system N/C					

FM/IS CONFIGURATIONS ARE AVAILABLE, PLEASE CONTACT THE FACTORY FOR DETAILS AND QUOTATION

# M6600 BASE OPTIONS

M6600 Base			
M6600 Base Options			
Options - Note "DDDD" = dimensions "XXX" = capacity			
Part Number	Description	Add to Base List Price	Price Code
<b>M6600-DDDD-XXX SSLC</b>	Upgrade Load Cells and Leveling Feet to Stainless Steel (1K, 2K, 5K, & 10K Capacities) - Includes Stainless Steel Leveling Feet & Hardware.	<b>\$495</b>	B
<b>M6600-DDDD-XXX TJB</b>	Top Access Junction Box, Accessible Through Top Plate.	<b>\$495</b>	B
<b>M6600-DDDD-XXX SSLF</b>	Upgrade to Stainless Steel Leveling Feet (In Place of Standard Plated) on Mild Steel Bases 1K, 2K, 5K, 10K Capacities - 1/2-20 Threads, 2" Diameter	<b>\$80</b>	C
<b>M6600-DDDD-XXX SSRJ</b>	Remote SS NEMA 4X Summing Box, Used for Remote Summing Applications Includes Standard 57115 Universal Summing Card, PA-Design.	<b>\$250</b>	B
<b>M6600-DDDD-XXX COL</b>	Base-Mounted Indicator Column, Flange Mates w/ All PA Indicators, 38" Nominal Height	<b>\$375</b>	C
<b>M6600-DDDD-XXX SSHM</b>	Hermetically Sealed 1K 2.5K or 4K Load Cells in place of Standard Plated, Includes Stainless Steel Leveling Feet and All Stainless Steel Hardware	<b>\$940</b>	B
<b>M6600-DDDD-XXX TAL</b>	Top Access Leveling Foot Adjustment, Accessible Through Top Plate.	<b>\$195</b>	B
<b>M6600-DDDD-XXX SLJ</b>	Stainless Steel Remote Summing J-Box, Leveling Feet, Load Cells and Hardware.	<b>\$595</b>	B
Mild Steel Forklift Skid Options			
Part Number	Description	List Price	Price Code
<b>M6600-DDDD-XXX FLS3</b>	Forklift Skids for 36" Wide Bases - Adds 3" to Height - Set of (2)	<b>\$350</b>	C
<b>M6600-DDDD-XXX FLS4</b>	Forklift Skids for 48" Wide Bases - Adds 3" to Height - Set of (2)	<b>\$370</b>	C
<b>M6600-DDDD-XXX FLS5</b>	Forklift Skids for 60" Wide Bases - Adds 3" to Height - Set of (2)	<b>\$390</b>	C
<b>M6600-DDDD-XXX FLS6</b>	Forklift Skids for 72" Wide Bases - Adds 3" to Height - Set of (2)	<b>\$410</b>	C
<b>M6600-DDDD-XXX FLS7</b>	Forklift Skids for 84" Wide Bases - Adds 3" to Height - Set of (2)	<b>\$430</b>	C
Mild Steel Pit Frames			
Part Number	Description	List Price	Price Code
<b>57599-1</b>	Fits 48" X 48", 1K, 2K, 5K, or 10K Capacity Bases - 3" Nominal Depth, For In-Floor Mounting, Completely Welded Including Corner Plates, Concrete Anchors, and Spacers.	<b>\$795</b>	C
<b>57599-2</b>	Fits 48" X 60", 1K, 2K, 5K, or 10K Capacity Bases - 3" Nominal Depth, For In-Floor Mounting, Completely Welded Including Corner Plates, Concrete Anchors, and Spacers.	<b>\$825</b>	C
<b>57599-3</b>	Fits 60" X 60", 1K, 2K, 5K, or 10K Capacity Bases - 3" Nominal Depth, For In-Floor Mounting, Completely Welded Including Corner Plates, Concrete Anchors, and Spacers.	<b>\$875</b>	C

## M6600 BASE OPTIONS

<b>Mild Steel Pit Frames</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>57599-4</b>	Fits 36" X 36", 1K, 2K, 5K, or 10K Capacity Bases - 3" Nominal Depth, For In-Floor Mounting, Completely Welded Including Corner Plates, Concrete Anchors, and Spacers.	<b>\$575</b>	C
<b>57603-1</b>	Fits 48" X 48" 20K Capacity Bases - 4" Nominal Depth, For In-Floor Mounting, Completely Welded Including Corner Plates, Concrete Anchors, and Spacers.	<b>Contact Factory for Quote</b>	
<b>57603-2</b>	Fits 48" X 60" 20K Capacity - 4" Nominal Depth, For In-Floor Mounting, Completely Welded Including Corner Plates, Concrete Anchors, and Spacers.	<b>Contact Factory for Quote</b>	
<b>57603-3</b>	Fits 60" X 60" 20K Capacity Bases - 4" Nominal Depth For In-Floor Mounting, Completely Welded Including Corner Plates, Concrete Anchors, and Spacers.	<b>Contact Factory for Quote</b>	
<b>57603-4</b>	Fits 60" X 72" 20K Capacity Bases - 4" Nominal Depth, For In-Floor Mounting, Completely Welded Including Corner Plates, Concrete Anchors, and Spacers.	<b>Contact Factory for Quote</b>	
<b>Mild Steel Mounting Options</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>56764-3</b>	Pit Spacers for 1K, 2K, 5K, 10K Capacity Bases - Set of (4) Pieces	<b>\$95</b>	C
<b>56764-2</b>	Pit Spacers for 20K Capacity Bases - Set of (4) Pieces	<b>\$125</b>	C
<b>56764-4</b>	Pit Spacers for 30K & 40K Capacity Bases - Set of (4) Pieces	<b>\$145</b>	C
<b>59352-1</b>	Set of (4) Plated Steel Base Anchors for up to 10K Capacity Bases (2-1/8" Opening Fits 2" Diameter Foot)	<b>\$100</b>	C
<b>59352-2</b>	Set of (4) Plated Steel Base Anchors for 20K Capacity Bases (3-1/8" Opening Fits 3" Diameter Foot)	<b>\$115</b>	C
<b>Mild Steel Bumper Guards</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>56260-2</b>	Bumper Guard, 36" X 3" - Safety Yellow Finish (Per Piece)	<b>\$225</b>	C
<b>56260-3</b>	Bumper Guard, 48" X 3" - Safety Yellow Finish (Per Piece)	<b>\$250</b>	C
<b>59351-3</b>	Bumper Guard, 48" X 4" - Safety Yellow Finish (Per Piece)	<b>\$325</b>	C
<b>56260-4</b>	Bumper Guard, 60" X 3" - Safety Yellow Finish (Per Piece)	<b>\$395</b>	C

# M6600 BASE OPTIONS

Options - Note "DDDD" = dimensions "XXX" = capacity			
Mild Steel Ramps			
Part Number	Description	List Price	Price Code
R-49958-1	Ramps for Mild Steel 6600, 24" X 36" X 3", Up to 5K	\$525	C
R-49958-2	Ramps for Mild Steel 6600, 30" X 36" X 3", Up to 5K	\$625	C
R-49958-12	Ramps for Mild Steel 6600, 36" X 36" X 3", Up to 10K	\$650	C
R-49958-10	Ramps for Mild Steel 6600 48" X 36" X 3", Up to 10K	\$650	C
R-49958-4	Ramps for Mild Steel 6600 48" X 48" X 3", Up to 10K	\$750	C
R-49958-11	Ramps for Mild Steel 6600, 60" X 36" X 3", Up to 10K	\$1,075	C
R-49958-5	Ramps for Mild Steel 6600 60" X 48" X 3", Up to 10K	\$1,175	C
R-49958-3	Ramps for Mild Steel 6600, 72" X 36" X 3", Up to 10K	<i>Contact Factory for Quote</i>	
R-49958-13	Ramps for Mild Steel 6600, 48" X 48" X 4", Up to 20K	\$1,795	C
R-49958-14	Ramps for Mild Steel 6600, 60" X 48" X 4", Up to 20K	<i>Contact Factory for Quote</i>	
R-49958-15	Ramps for Mild Steel 6600, 72" X 48" X 4", Up to 20K	<i>Contact Factory for Quote</i>	
R-49958-7	Ramps for Mild Steel 6600, 84" X 48" X 4", Up to 20K	<i>Contact Factory for Quote</i>	

## SS6600 WASHDOWN BASE

SS6600 Washdown Base					
304 Stainless Steel Base Shot Blast Smooth Deckplate					
Part Number	Capacity Lbs.	Description	Base Size	List Price	Price Code
SS6600-2424-1K	1000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	24" X 24" - 3" High	\$4,695	B
SS6600-2424-2K	2000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	24" X 24" - 3" High	\$4,695	B
SS6600-2424-5K	5000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	24" X 24" - 3" High	\$4,695	B
SS6600-3030-1K	1000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	30" X 30" - 3" High	\$4,795	B
SS6600-3030-2K	2000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	30" X 30" - 3" High	\$4,795	B
SS6600-3030-5K	5000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	30" X 30" - 3" High	\$4,795	B
SS6600-3636-1K	1000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	36" X 36" - 3" High	\$4,895	B
SS6600-3636-2K	2000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	36" X 36" - 3" High	\$4,895	B
SS6600-3636-5K	5000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	36" X 36" - 3" High	\$4,895	B
SS6600-3636-10K	10000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	36" X 36" - 3" High	\$4,895	B
SS6600-3648-1K	1000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	36" X 48" - 3" High	\$4,995	B
SS6600-3648-2K	2000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	36" X 48" - 3" High	\$4,995	B
SS6600-3648-5K	5000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	36" X 48" - 3" High	\$4,995	B
SS6600-3648-10K	10000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	36" X 48" - 3" High	\$4,995	B
SS6600-4848-1K	1000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	48" X 48" - 3" High	\$5,195	B
SS6600-4848-2K	2000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	48" X 48" - 3" High	\$5,195	B
SS6600-4848-5K	5000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	48" X 48" - 3" High	\$5,195	B
SS6600-4848-10K	10000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	48" X 48" - 3" High	\$5,195	B
SS6600-4848-20K	20000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	48" X 48" - 4" High	<b>Contact Factory For Quote</b>	
SS6600-4860-5K	5000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	48" X 60" - 3" High	<b>Contact Factory For Quote</b>	
SS6600-4860-10K	10000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	48" X 60" - 3" High	<b>Contact Factory For Quote</b>	
SS6600-4860-20K	20000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	48" X 60" - 4" High	<b>Contact Factory For Quote</b>	

FM/IS CONFIGURATIONS ARE AVAILABLE, PLEASE CONTACT THE FACTORY FOR DETAILS AND QUOTATION



## SS6600 WASHDOWN BASE

SS6600 Washdown Base					
304 Stainless Steel Base Shot Blast Smooth Deckplate					
Part Number	Capacity Lbs.	Description	Base Size	List Price	Price Code
SS6600-4872-5K	5000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	48" X 72" - 3" High	<i>Contact Factory For Quote</i>	
SS6600-4872-10K	10000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	48" X 72" - 3" High	<i>Contact Factory For Quote</i>	
SS6600-6060-5K	5000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	60" X 60" - 3" High	<b>\$8,795</b>	B
SS6600-6060-10K	10000	Stainless Steel Construction, Smooth Deckplate Shot Blast Finish	60" X 60" - 3" High	<b>\$8,995</b>	B
<b>Other sizes and capacities are available. Contact the factory for quotation.</b>					
Factory Calibration - Factory matching when ordered with any Pennsylvania host counting scale (7600 DB) or digital indicator as a system N/C					

**FM/IS CONFIGURATIONS ARE AVAILABLE, PLEASE CONTACT THE FACTORY FOR DETAILS AND QUOTATION**

SS6600 Washdown Base Options					
Stainless Steel Options & Upgrades					
Part Number	Description	List Price	Price Code		
59241-3	Stainless Steel Forklift Skids for 1K, 2K, 5K, or 10K Capacity Bases, 36" Size	<i>Contact Factory for Quote</i>			
59241-4	Stainless Steel Forklift Skids for 1K, 2K, 5K, or 10K Capacity Bases, 48" Size	<i>Contact Factory for Quote</i>			
59241-5	Stainless Steel Forklift Skids for 1K, 2K, 5K, or 10K Capacity Bases, 60" Size	<i>Contact Factory for Quote</i>			
59241-6	Stainless Steel Forklift Skids for 1K, 2K, 5K, or 10K Capacity Bases, 72" Size	<i>Contact Factory for Quote</i>			
59241-7	Stainless Steel Forklift Skids for 1K, 2K, 5K, or 10K Capacity Bases, 84" Size	<i>Contact Factory for Quote</i>			
57651-1	Upgrade to Hermetic Sealed Stainless Steel 1K Load Cells (in place of Standard Stainless Steel, Environmentally Sealed Load Cells), Includes Standard Stainless Steel NEMA 4 Summing Box on Stainless Steel Bases	<b>\$750</b>	B		
57651-2	Upgrade to Hermetic Sealed Stainless Steel 2.5K Load Cells (in place of Standard Stainless Steel, Environmentally Sealed Load Cells), Includes Standard Stainless Steel NEMA 4 Summing Box on Stainless Steel Bases	<b>\$850</b>	B		
57651-4	Upgrade to Hermetic Sealed Stainless Steel 4K Load Cells (in place of Standard Stainless Steel, Environmentally Sealed Load Cells), Includes Standard Stainless Steel NEMA 4 Summing Box on Stainless Steel Bases	<b>\$950</b>	B		
Special	Diamond Plate Deck Surface in Place of Standard Shot Blast Smooth Plate	<i>Contact Factory for Quote</i>			

## SS6600 WASHDOWN BASE OPTIONS

<b>Stainless Steel Pit Frames</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>57599-8</b>	Fits 36" X 48", 1K, 2K, 5K, or 10K Capacity Bases	<b>\$1,795</b>	C
<b>57599-21</b>	Fits 48" X 48", 1K, 2K, 5K, or 10K Capacity Bases	<b>\$1,995</b>	C
<b>Stainless Steel Mounting Options</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>56764-23</b>	Stainless Steel Pit Spacers for 1K, 2K, 5K, or 10K Capacity Bases - Set of (4)	<b>\$150</b>	C
<b>56764-22</b>	Stainless Steel Pit Spacers for 20K Capacity Bases - Set of (4)	<b>\$150</b>	C
<b>56764-24</b>	Stainless Steel Pit Spacers for 30K or 40K Capacity Bases - Set of (4)	<b>\$150</b>	C
<b>Stainless Steel Ramps</b>			
<b>Part Number</b>	<b>Description</b>	<b>List Price</b>	<b>Price Code</b>
<b>R-49958-21</b>	Ramps for Stainless Steel 6600 24" X 36" X 3", Up to 10K	<b>\$1,595</b>	C
<b>R-49958-22</b>	Ramps for Stainless Steel 6600 30" X 36" X 3", Up to 10K	<b>\$1,895</b>	C
<b>R-49958-23</b>	Ramps for Stainless Steel 6600 36" X 36" X 3", Up to 10K	<b>\$2,195</b>	C
<b>R-49958-30</b>	Ramps for Stainless Steel 6600 48" X 36" X 3", Up to 10K	<b>\$2,495</b>	C
<b>R-49958-25</b>	Ramps for Stainless Steel 6600 48" X 48" X 3", Up to 10K	<b>\$2,695</b>	C
<b>R-49958-31</b>	Ramps for Stainless Steel 6600 60" X 36" X 3", Up to 10K	<b>\$2,895</b>	C
<b>R-49958-39</b>	Ramps for Stainless Steel 6600 60" X 48" X 3", Up to 10K	<b>\$3,195</b>	C
<b>R-49958-24</b>	Ramps for Stainless Steel 6600 72" X 36" X 3", Up to 10K	<b>Contact Factory for Quote</b>	
<b>R-49958-27</b>	Ramps for Stainless Steel 6600 48" X 48" X 4" Up to 20K	<b>Contact Factory for Quote</b>	
<b>R-49958-28</b>	Ramps for Stainless Steel 6600 60" X 48" X 4", Up to 20K	<b>Contact Factory for Quote</b>	
<b>R-49958-29</b>	Ramps for Stainless Steel 6600 72" X 48" X 4", Up to 20K	<b>Contact Factory for Quote</b>	
<b>R-49958-26</b>	Ramps for Stainless Steel 6600 84" X 48" X 4", Up to 20K	<b>Contact Factory for Quote</b>	

# U6600 BULK CONTAINER BASE

## Standard Features

- Super heavy duty industrial design with a full tube steel frame
- MS models with safety Yellow Powder Coated finish
- SS Models are IP68 washdown protection, all 304 SS material, load cells, hardware and come with a remote SS Nema 4X summing card j-box
- High performance load cells and summing card to provide outstanding accuracy for weight or count applications.
- 20' cable with CPC quick disconnect for easy connection to all Pennsylvania Scale indicators and to digital indicator or counting scale with dual base option
- 100% + Overload Protection
- Proudly made in the USA with the quality, dependability and performance you need for outstanding weighing performance!



## Specifications:

- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Dimensions available in 18" X 24" to 120" X 120" and larger
- Full scale output 2 mV/V or 3 mV/V +/- 10%
- Recommended supply voltage 5-12 VDC
- Two Year Limited Warranty

## Options:

- Load cell upgrade to SS environmentally sealed or hermetically sealed
- FM/IS configuration
- Custom sizes and applications
- Floor or base mount columns

Scan or Click the QR Codes for detailed product information

[U6600 Web Page](#)



[U6600 Product Literature](#)



# U6600 BULK CONTAINER BASE

U6600 Bulk Container Scale					
Part Number	Capacity Lbs.	Description	Base Size	List Price	Price Code
U6600-4456-1K	1,000	U6600 Low Profile Bulk Container Scale Safety Yellow Powder Coated Finish	32"W X 50"OD	\$1,895	C
U6600-4456-2K	2,000	U6600 Low Profile Bulk Container Scale Safety Yellow Powder Coated Finish	32"W X 50"OD	\$1,895	C
U6600-4456-5K	5,000	U6600 Low Profile Bulk Container Scale Safety Yellow Powder Coated Finish	32"W X 50"OD	\$1,895	C
U6600-4456-10K	10,000	U6600 Low Profile Bulk Container Scale Safety Yellow Powder Coated Finish	32"W X 50"OD	\$1,895	C
U6600-6060-1K	1,000	U6600 Low Profile Bulk Container Scale Safety Yellow Powder Coated Finish	60"W X 60"OD	\$2,295	C
U6600-6060-2K	2,000	U6600 Low Profile Bulk Container Scale Safety Yellow Powder Coated Finish	60"W X 60"OD	\$2,295	C
U6600-6060-5K	5,000	U6600 Low Profile Bulk Container Scale Safety Yellow Powder Coated Finish	60"W X 60"OD	\$2,295	C
U6600-6060-10K	10,000	U6600 Low Profile Bulk Container Scale Safety Yellow Powder Coated Finish	60"W X 60"OD	\$2,295	C
<b>Available in custom sizes and in SS Washdown Configuration. Contact factory for details and quotation</b>					
Factory Calibration - Factory matching when ordered with any Pennsylvania dual base counting scale (7600 DB) or digital indicator as a system					N/C
U6600 Bulk Container Scale Options					
Part Number	Description		List Price	Price Code	
56728-1	38" Powder coated column, mounts to floor. Top Flange fits all indicators in 7X00 series. For Counting Scale mount order with 56731-1 below		\$350	C	
56731-1	Scale shelf, mounts to any above column flange fits all 7X00 series bench scales with 25" lip. Ideal for dual base counting system.		\$100	C	

**STAINLESS STEEL IP68 WASHDOWN AND FM/IS CONFIGURATIONS ARE AVAILABLE,  
PLEASE CONTACT THE FACTORY FOR DETAILS AND QUOTATION**



# M6300 & SS6300 DRUM BUNNY SCALE

## Standard Features

- Extremely heavy-duty design that will survive and thrive in harsh industrial environments
- Durable powder-coated finish for the M6300 and high-quality 304 Stainless Steel for the SS6300 Washdown model
- Large diameter wheels allow for effortless moving the loaded 6300 even on inclines or rough surfaces. Swivel caster with lock to safely park in place while empty or loaded
- Full-function digital indicator with Tare, Tare Input, Zero and Gross/Net functions and weight displayed in two units of measure provides flexible operation to meet your requirements
- High Performance Battery Power for ultimate mobility. The MS6300 weight indicator uses a standard USB battery pack that allows for a hot swap of batteries eliminating costly downtime. The washdown SS6300 indicator has a built-in rechargeable battery which provides up to 32 hour of continuous operation on a single charge
- FM Approved Intrinsically Safe configurations available
- Designed and made in the USA with the quality you expect and demand in precision industrial weighing

## Specifications:

- Power AC line voltages 115 VAC, 50/60 Hz Power Consumption 0.25A at 115 VAC
- Circuit Protection RFI, EMI, ESD Protection ADC shielded
- Display: .56 LED Red, bright, stable and easy to read
- Indications for Gross, Net, Tare, Count, Piece Weight, % Accuracy, and Base 2
- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Internal Resolution 1/8,000,000
- 5 VDC excitation to power 3, 350-ohm load cells
- Dimensions 24" X 24"
- Two year limited warranty



## Options:

- Load cell upgrade to SS environmentally sealed or hermetically sealed
- FM/IS configuration
- Narrow diameter tank holder bracket

Scan or Click the QR Codes for detailed product information

[6300 Web Page](#)



[6300 Product Literature](#)





# M6300 & SS6300 DRUM BUNNY SCALE

M6300 and SS6300 Drum Bunny			
Part Number	Description	List Price	Price Code
<b>M6376-2424-1K</b>	M6300 Roll and weigh barrel Scale. Steel construction with powder coated finish. 24" X 24" platform, 1,000 X .2 lbs. capacity. With 7600EXP battery powered indicator	<b>\$3,795</b>	C
<b>SS6376-2424-1K</b>	SS6300 Roll and weigh barrel Scale. IP66K Washdown rated, 304 Stainless Steel construction with SS load cells and J-box. 24" X 24" platform, 1,000 X .2 lbs. capacity. With 7600/4 WD battery powered indicator	<b>\$6,995</b>	C

**FM/IS CONFIGURATIONS ARE AVAILABLE, PLEASE CONTACT THE FACTORY FOR DETAILS AND QUOTATION**

# M6900 BASE

## Standard Features

- Super heavy duty industrial design with a full tube steel frame and rugged deck plate
- MS models with heavy duty smooth deck plate deck and Powder Coated finish
- SS Models are IP68 washdown protection, all 304 SS material, load cells, hardware and come with a remote SS Nema 4X summing card j-box
- High performance load cells and summing card to provide outstanding accuracy for weight or count applications.
- 20' cable with CPC quick disconnect for easy connection to all Pennsylvania Scale indicators and to digital indicator or counting scale with dual base option
- 100% + Overload Protection
- Proudly made in the USA with the quality, dependability and performance you need for outstanding weighing performance!



## Specifications:

- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Dimensions available in 18" X 24" to 120" X 120" and larger
- Full scale output 2 mV/V or 3 mV/V +/- 10%
- Recommended supply voltage 5-12 VDC
- Four Year Limited Warranty

## Options:

- Load cell upgrade to SS environmentally sealed or hermetically sealed
- FM/IS configuration
- Second Ramp
- Backstop to prevent roll off on side without ramp
- Custom sizes and applications
- Floor or base mount columns



Scan or Click the QR Codes for detailed product information

[6900 Web Page](#)



[6900 Product Literature](#)



# M6900 BASE

<b>6900 Series Barrel &amp; Drum Scales</b>					
<b>Part Number</b>	<b>Capacity Lbs.</b>	<b>Description</b>	<b>Base Size</b>	<b>List Price</b>	<b>Price Code</b>
M6900-3030-1K	1,000	6900 Ultra Low-Profile Scale - Mild Steel Construction	30" X 30"	\$2,645	A/B
SS6900-3030-1K	1,000	6900 Ultra Low-Profile Scale - Stainless Steel Construction	30" X 30"	\$6,495	B
M6900-3636-1K	1,000	6900 Ultra Low-Profile Scale - Mild Steel Construction	36" X 36"	\$2,745	A/B
SS6900-3636-1K	1,000	6900 Ultra Low-Profile Scale - Stainless Steel Construction	36" X 36"	\$6,995	B
Factory Calibration - Factory matching when ordered with any Pennsylvania host counting scale (7600 DB) or digital indicator as a system N/C					
<b>6900 Options</b>					
<b>Part Number</b>	<b>Description</b>		<b>List Price</b>	<b>Price Code</b>	
6000-3031	2nd Ramp, 30" X 16" for On/Off Access - Mild Steel Powder Coated Construction		\$450	B	
59280-3	2nd Ramp, 30" X 16" for On/Off Access - Stainless Steel Construction		\$1,045	B	
6000-0293P	2nd Ramp, 36" X 16" for On/Off Access - Mild Steel Powder Coated Construction		\$550	B	
59280-4	2nd Ramp, 36" X 16" for On/Off Access - Stainless Steel Construction		\$1,345	B	
56728-1	38" Powder coated column, mounts to floor. Top Flange fits all indicators in 7X00 series. For Counting Scale mount order with 56731-1 below		\$350	C	
56731-1	Scale shelf, mounts to any above column flange fits all 7X00 series bench scales with 25" lip. Ideal for dual base counting system.		\$100	C	
<b>6950 Series Barrel &amp; Drum Scale With Live Ramps</b>					
<b>6950 Floor Scale Base</b>					
<b>Part Number</b>	<b>Capacity Lbs.</b>	<b>Description</b>	<b>Base Size</b>	<b>List Price</b>	<b>Price Code</b>
M6950-3030-1K2R	1,000	6950 Live Ramp Scale Package - Mild Steel Construction	30" X 30"	\$2,795	A/B
SS6950-3030-1K2R	1,000	6950 Live Ramp Scale Package - Stainless Steel Construction	30" X 30"	\$6,495	B
<b>6950 Options</b>					
<b>Part Number</b>	<b>Description</b>		<b>List Price</b>	<b>Price Code</b>	
56728-1	38" Powder coated column, mounts to floor. Top Flange fits all indicators in 7X00 series. For Counting Scale mount order with 56731-1 below		\$350	C	
56731-1	Scale shelf, mounts to any above column flange fits all 7X00 series bench scales with 25" lip. Ideal for dual base counting system.		\$100	C	

**FM/IS CONFIGURATIONS ARE AVAILABLE, PLEASE CONTACT THE FACTORY FOR DETAILS AND QUOTATION**

# M64, M66 & M64CS AIRLINE BAGGAGE SCALES

## Standard Features

- Extremely heavy-duty design provides unmatched length of trouble-free service
- Durable powder-coated finish frame and 304 Stainless Steel #3 finish platform cover
- 304 Stainless Steel #3 finish flush mount displays
- **NEW!** M64CS Curbside Check In Scale System
- M64 available in 18" X 24" X 5" and 24" X 24" X 5" standard sizes
- M66 available larger custom sizes with a 3" high profile
- Designed and made in the USA with the quality you expect and demand in precision industrial weighing

## Specifications:

- Power AC line voltages 115 VAC, 50/60 Hz (Specify when ordering)
- Power Consumption 0.25A at 115 VAC
- Circuit Protection RFI, EMI, ESD Protection ADC shielded
- Display: .56 LED Red, bright, stable and easy to read
- Indications for Gross, Net, Tare, Count, Piece Weight, % Accuracy, and Base 2
- Operating Temperature 14°F to 104°F, -10°C to 40°C
- Internal Resolution 1/8,000,000
- 5 VDC excitation to power 4, 350-ohm load cells
- Two year limited warranty
- Legal for trade M64 NTEP COC 98-013. M66 COC 97-009A4 & 90-097A3
- Measurement Canada COC M64 AM-4714 & AM-5647. M66 COC AM-5647 & S.WA-4456 Rev.3



## Options:

- Custom Sizes and Capacities
- Interface to Ticketing and manifesting third party software
- Electronics and Displays for use with existing Pennsylvania Scale and third party bases

Scan or Click the QR Codes for detailed product information

[Baggage Scale Web Page](#)

[Baggage Scale Product Literature](#)



## M64 & M66 AIRLINE BAGGAGE SCALES

Airline Baggage Scales					
Part Number	Capacity Lbs.	Description	Base Size	List Price	Price Code
<b>M64-1824-250-1</b>	250	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and ONE (1) Stainless Steel face plate flush mount display with function buttons	18" X 24" X 5"	<b>\$2,250</b>	A/B
<b>M64-1824-250-2</b>	250	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and TWO (2) Stainless Steel face plate flush mount displays, one with function buttons and one without	18" X 24" X 5"	<b>\$2,350</b>	A/B
<b>M64-1824-500-1</b>	500	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and ONE (1) Stainless Steel face plate flush mount display with function buttons	18" X 24" X 5"	<b>\$2,250</b>	A/B
<b>M64-1824-500-2</b>	500	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and TWO (2) Stainless Steel face plate flush mount displays, one with function buttons and one without	18" X 24" X 5"	<b>\$2,350</b>	A/B
<b>M64-1824-1K-1</b>	1,000	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and ONE (1) Stainless Steel face plate flush mount display with function buttons	18" X 24" X 5"	<b>\$2,250</b>	A/B
<b>M64-1824-1K-2</b>	1,000	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and TWO (2) Stainless Steel face plate flush mount displays, one with function buttons and one without	18" X 24" X 5"	<b>\$2,350</b>	A/B
<b>M64-2424-250-1</b>	250	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and ONE (1) Stainless Steel face plate flush mount display with function buttons	24" X 24" X 5"	<b>\$2,295</b>	A/B



## M64 & M66 AIRLINE BAGGAGE SCALES

Airline Baggage Scales					
Part Number	Capacity Lbs.	Description	Base Size	List Price	Price Code
<b>M64-2424-250-1</b>	250	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and ONE (1) Stainless Steel face plate flush mount display with function buttons	24" X 24" X 5"	<b>\$2,295</b>	A/B
<b>M64-2424-250-2</b>	250	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and TWO (2) Stainless Steel face plate flush mount displays, one with function buttons and one without	24" X 24" X 5"	<b>\$2,395</b>	A/B
<b>M64-2424-500-1</b>	500	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and ONE (1) Stainless Steel face plate flush mount display with function buttons	24" X 24" X 5"	<b>\$2,295</b>	A/B
<b>M64-2424-500-2</b>	500	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and TWO (2) Stainless Steel face plate flush mount displays, one with function buttons and one without	24" X 24" X 5"	<b>\$2,395</b>	A/B
<b>M64-2424-1K-1</b>	1,000	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and ONE (1) Stainless Steel face plate flush mount display with function buttons	24" X 24" X 5"	<b>\$2,295</b>	A/B
<b>M64-2424-1K-2</b>	1,000	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and TWO (2) Stainless Steel face plate flush mount displays, one with function buttons and one without	24" X 24" X 5"	<b>\$2,395</b>	A/B

# M64 & M66 AIRLINE BAGGAGE SCALES

<b>M66 Series Airline Baggage Scales - Complete Systems</b>					
Part Number	Capacity Lbs.	Description	Base Size	List Price	Price Code
<b>M66-3030-1K-1</b>	1,000	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and ONE (1) Stainless Steel face plate flush mount display with function buttons	30" X 30" X 3"	<i>Contact factory for quotation</i>	
<b>M66-3030-1K-2</b>	1,000	Complete Airline Baggage Scale System with heavy duty frame and 304 Stainless Steel Top Plate. Includes electronics and TWO (2) Stainless Steel face plate flush mount displays, one with function buttons and one without	30" X 30" X 3"	<i>Contact factory for quotation</i>	
<b>Larger and Custom Sizes that are NTEP and Measurement Canada Approved.</b>					
<b>Consult the factory for information and quotation</b>					
<b>Airline Baggage Scale Electronics and Display Packages</b>					
Part Number	Description			List Price	Price Code
<b>ABS7400-1</b>	Single Display - NTEP and Measurement Canada approved, Aluminum Enclosure w/ Main Board to Upgrade Existing Platform by Other Manufacturers			<b>\$925</b>	B
<b>ABS7400-2</b>	Dual Display - NTEP and Measurement Canada approved, Aluminum Enclosure w/ Main Board to Upgrade Existing Platform by Other Manufacturers			<b>\$1,025</b>	B
<b>3 Displays</b>	Add a 3rd Display for Any Baggage Scale System Above, for a Total of 3 Displays			<i>Contact factory for quotation</i>	
<b>4 Displays</b>	Add a 3rd and 4th Display for Any Baggage Scale System Above, for A Total of 4 Displays			<i>Contact factory for quotation</i>	
<b>M64CS Curbside Check In Airline Baggage Scale System</b>					
Part Number	Description			List Price	Price Code
<b>M64CS-1818-1K</b>	M64 Curbside Check In Scale System. Includes battery powered 7600EXP Indicator, M6400-1818-1K Base with SS platform cover, 36" Column and caster wheel kit			<b>\$2,395</b>	B
<b>M64CS-1824-1K</b>	M64 Curbside Check In Scale System. Includes battery powered 7600EXP Indicator, M6400-1824-1K Base with SS platform cover, 36" Column and caster wheel kit			<b>\$2,495</b>	B
<b>M64CS-2424-1K</b>	M64 Curbside Check In Scale System. Includes battery powered 7600EXP Indicator, M6400-2424-1K Base with SS platform cover, 36" Column and caster wheel kit			<b>\$2,595</b>	B

# COUNTING SCALE ROI CALCULATOR

## SMART COMPANIES BOOST ROI WITH HIGH-RESOLUTION PENNSYLVANIA COUNTING SCALES!

At Pennsylvania Scale Company, we're known for providing durable and precise counting scale systems. Now, we're excited to introduce the latest evolution in our product lineup: the 7500, 7600, and 7800 High-Resolution Counting Scales!

These new models bring cutting-edge capabilities that go beyond our legacy designs, delivering exceptional industrial counting performance and flexibility. With a minimum piece weight resolution of 1 part in 200,000, they ensure unmatched accuracy and efficiency for your customers.

**Fast ROI in any application!**

We're so confident in the high-performance design of these scales that we've developed an ROI Calculator to showcase just how quickly your customers can see returns on their investment.

The ROI Calculator allows users to input key data such as:


- Average number of parts counted per shift
- Number of shifts per day
- Workdays per week
- Average cost per piece

It then calculates how quickly the investment pays off and demonstrates the potential long-term impact on their bottom line. Results can even be saved as a downloadable PDF for easy reference.

**Ready to Explore?**

Use this powerful tool to discover why a Pennsylvania High-Resolution Counting Scale is the right choice for their business.

Try the ROI Calculator today: Check it out at <https://pascale.com/counting-scales/> or by scanning this QR Code below:

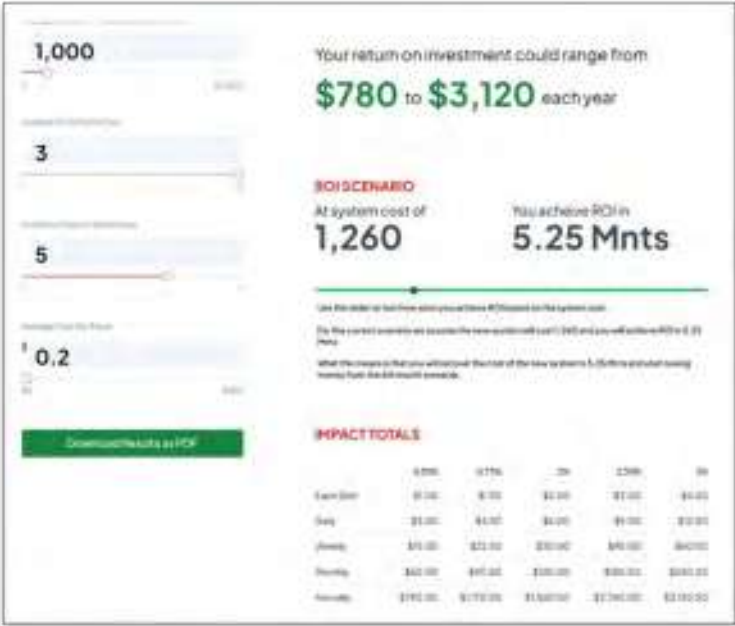

## REMOTE DISPLAYS

### SMART DISPLAY OPTIONS FOR PLUG AND PLAY SETUP WITH SELECT PENNSYLVANIA SCALE PRODUCTS

#### PSCRD2.4

Mini Remote Display with 2.4" LED Digits. Display Count or Weight.



Extra strong polycarbonate housing. 8x40 pixels, 2.4" full matrix LED boards allow to display not only the weight values but count and other scale data points. Easily visible from up to 85 feet. Includes 10' of interface cable and plug and play compatibility when order with a Pennsylvania Scale Indicator or Bench Scale.

#### PSCRD4.7

Remote Display with Visor with 4.7 LED Digits. Display Weight with GROSS/NET/TARE Indicators.



Powder coated steel housing which includes a drop-down electronics carriage for quick and easy installation and service. 8x40 pixels, 4.7" full matrix LED boards allow to display Gross/Net/Tare indicators. Easily visible from up to 170 feet.


<b>PSCRD2.4</b>	Mini Remote Display with 2.4" LED Digits. Display Count or Weight. Includes 10' of serial interface cable	<b>\$695</b>	C
<b>PSCRD4.7</b>	Remote Display with Visor with 4.7 LED Digits. Display weight with GROSS/NET/TARE Indicators	<b>\$1,250</b>	C

# PENNSYLVANIA EtherNet/IP APPLICATION GUIDE



## 7800 WITH ETHERNET IP

### THE ULTIMATE CHOICE FOR SEAMLESS PROCESS CONTROL AND RELIABILITY

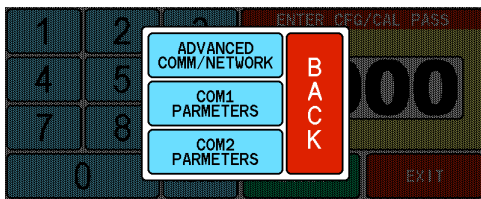

#### ADVANCED COMM/NETWORK MENU

MAC: 00:00:00:00:00:00  
IP: 192.168.1.153  
SN: 255.255.255.0  
GW: 0.0.0.0



**Effortless Setup:** Say goodbye to PC connections and complex third-party software configurations. With the 7800 EIP, all setup is conveniently performed through the indicator or scale HMI. Settings are presented in a user-friendly, human-readable format for easy comprehension.

**Flexible Configuration:** Enjoy the freedom to read or write scale data without the constraints of fixed setups. Data in and out can be mapped to any register, making the 7800 EIP the ideal replacement for existing indicators. Duplicate the setup seamlessly, eliminating the need to reprogram or adjust PLC or control device settings.

**Painless Troubleshooting:** On-board diagnostics take the pain out of troubleshooting, ensuring efficient problem resolution and minimizing downtime.

**Legendary Accuracy and Reliability:** The 7800 EIP combines Pennsylvania Scale's renowned weighing accuracy with an intuitive operating system and robust real-world reliability. It's the ultimate choice for all your Process Control Weighing and counting applications.




# PENNSYLVANIA EtherNet/IP APPLICATION GUIDE

7800 SERIES ETHERNETIP

## SPECIFICATIONS

Power Requirements:	3.5 VDC 250 mA
IP Address:	Full IP Address Range
Connector Type:	Bulkhead with strain relief RJ45
Diagnostic LEDs:	Option and Network Status
Dimensions:	3" L X 2.5" W X 0.5: H
Temperature Range:	14°F – 115°F

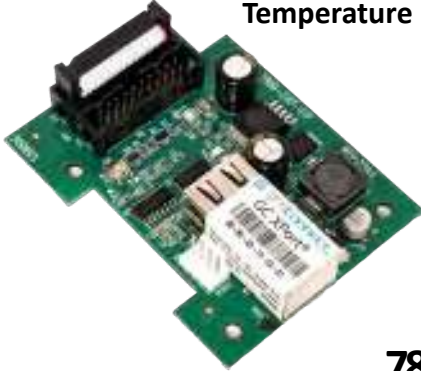

## 7800 WITH ETHERNET IP

### OPTIMAL SELECTION FOR FLAWLESS PROCESS MANAGEMENT AND DEPENDABILITY



- **POWERFUL FEATURES:** Unlock a wealth of advanced features designed to streamline your tasks and enhance your workflow.
- **INTUITIVE USER EXPERIENCE:** Enjoy effortless navigation and operation with a user-friendly touchscreen interface that's easy to learn and use.
- **PRECISION WEIGHING:** Achieve accurate and reliable weighing results, meeting the highest standards of precision in your applications.
- **SUPER EFFICIENT:** Boost productivity and efficiency with the speed and responsiveness of our cutting-edge touchscreen indicator.

# PENNSYLVANIA COUNTING SCALE APPLICATION GUIDE

---



**HIGH PERFORMANCE ACCURACY,  
POWERFUL AND FLEXIBLE  
INNOVATIVE FEATURES &  
RUGGED DESIGN**

Since 1908 Pennsylvania has designed and manufactured legendary counting scale systems. Companies have counted on our scales to be an essential tool for managing inventory, pulling orders from a stockroom for production, creating kits of parts, or providing fulfillment services for a third party. Any products or parts that need tracked by count needs a rugged and reliable precision counting scale.

The Pennsylvania Counting Scale line has three models to choose from with the capabilities and features to meet and exceed your expectations for any application. To make sure you select the best solution, use our counting scale application guide on the following pages



## ***Model 7500HR Counting Scale***

- High Resolution Counting and Weighing 20,000 Divisions
- Heavy-duty powder coated steel and SS construction
- Clean, convenient design with bright, Red LED display
- Simple functionality with Zero, Sample Set, Units and Print function buttons
- Two units of measurement, including lb., kg, g, oz t, lb. t, gr, dwt, oz, c, oz f, l, ml, tons and lb. -oz
- Easy to use one step counting
- One powerful and flexible standard serial port,
- Four-year limited warranty



## ***Model 7600HR Counting Scale***

- High Resolution Counting and Weighing 20,000 Divisions
- Heavy-duty powder coated steel and SS construction
- Clean, convenient design with bright, Red LED display
- Full functions with Sample, Zero, Tare, Keypad Tare, Gross/Net, Piece Weight, Print, Base and Units
- Two units of measurement, including lb., kg, g, oz t, lb. t, gr, dwt, oz, c, oz f, l, ml, tons and lb. -oz
- Single or optional dual base-counting and weighing
- Multiple count modes and Auto Sample Update and percent-of error/accuracy display
- Fast one-step or two-step counting
- One powerful and flexible standard serial ports, optional wired ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth
- Four-year limited warranty

# PENNSYLVANIA COUNTING SCALE APPLICATION GUIDE

---



## ***Model 7800HR Touchscreen Counting Scale***

- High Resolution Counting and Weighing 20,000 Divisions
- Heavy-duty powder coated steel and SS construction
- Clean, convenient design with bright, stable full-color display and touchscreen
- Full alpha-numeric QWERTY keyboard for easy entry of scale data points
- Check weighing and Setpoint relay operation
- SKU/Product ID Database to store and recall by alphanumeric Part#, Description, Piece Weight, Tare Weight, 3 user-defined Fields, Over/Under Check weigh Settings, Setpoint/Relay Target settings
- Adaptive changes to show units of measurement, including lb., kg, g, oz t, lb. t, gr, dwt, oz, c, oz f, l, ml, tons and lb. -oz
- Single or optional dual base-counting and weighing
- Multiple count modes and Auto Sample Update and percent-of error/accuracy display
- Fast one-step or two-step counting
- Two powerful and flexible standard serial ports, optional wired ethernet, WiFi, USB Virtual Com Port, USB HID/Keyboard Emulation and Bluetooth
- Four-year limited warranty

# PENNSYLVANIA COUNTING SCALE APPLICATION GUIDE

## Choosing the Best Pennsylvania Scale Counting Scale For Your Needs

SCALE FUNCTION	7500	7600	7800
HMI	LED DISPLAY, 4-BUTTON KEYPAD	LED DISPLAY FULL NUMERIC KEYPAD	LCD TOUCHSCREEN AND FULL QWERTY ALPHANUMERIC
SIMPLE 1 STEP COUNTING	YES	YES	YES
2 STEP AND ADVANCED COUNTING METHODS	NO	YES	YES
PIECE WEIGHT DISPLAYED	NO	YES - MOMENTARY WHEN P/W BUTTON PRESSED	YES - ALWAYS DISPLAYED IN COUNTING MODE
% OF ACCURACY OR ERROR COUNTING	NO	YES - MOMENTARY AFTER UPDATE	YES - ALWAYS DISPLAYED IN COUNTING MODE
AUTOMATIC SAMPLE UPDATE	NO	YES	YES
MANUAL INPUT OF PIECE WEIGHT	NO	YES	YES
SUPER RESOLUTION OPTION	NO	NO	YES
PLATFORM AND KEYPAD TARE	NO	YES	YES
SECOND SCALE BASE INPUT	NO	YES – OPTIONAL	YES – OPTIONAL
STORE AND RECALL PIECE WEIGHTS BY ID	NO	NO	YES - 750 STANDARD BY ALPHANUMERIC ID AND DESCRIPTION
CHECKWEIGH BY COUNTING	NO	NO	YES
BARCODE SCANNING	NO	NO	YES - BARCODE SCANNING ENTRY OF ALL SCALE DATA
BARCODE LABEL PRINTING	NO	YES	YES - WITH ALPHANUMERIC DATA FIELDS
USER DEFINED DATA FIELDS	NO	NO	YES – 3 ALPHANUMERIC
ADVANCED COMMUNICATION OPTIONS	NO	YES- WIRED, WIRELESS ETHERNET, USB, BLUETOOTH	YES- WIRED, WIRELESS ETHERNET, ETHERNET/IP, USB, BLUETOOTH
THIRD PARTY SOFTWARE INTERFACE AVAILABLE	NO	YES	YES

*We are the counting scale experts, and you can put our years of experience and outstanding counting scale systems to work at your company.*



# PENNSYLVANIA PRINTER APPLICATION GUIDE



THE PENNSYLVANIA SCALE BARCODE, LABEL AND TAPE PRINTERS OFFERS OUTSTANDING PERFORMANCE, RELIABILITY AND FLEXIBILITY TO MEET THE DEMANDS OF INDUSTRIAL SCALE PRINTING APPLICATIONS. IDEAL FOR ALL NON-WASHDOWN APPLICATIONS SUCH AS: PACKAGING, PRODUCTION, WAREHOUSING, SHIPPING AND RECEIVING PRINTING NEEDS. DIRECT THERMAL PRINT TECHNOLOGY PROVIDES HIGH QUALITY LABELS TIME AFTER TIME. WHETHER IT IS A BASIC LABEL FORMAT OR A CUSTOM LABEL DESIGN, WE CAN PROVIDE A TRUE PLUG AND PLAY SETUP AND INSTALLATION FOR MOST LABELING APPLICATIONS

## FEATURES

- Maximum speed 5 ips (127 mm/sec)
- Open ACCESS™ design for easy media loading
- 203 dpi print resolution (8 dots/mm) Direct thermal (d) and Thermal transfer (t) printing of bar codes, text, and graphics
- Core Inner Diameter: 0.5" (12.7 mm), 1.0" (25.4 mm), 1.5" (37.1 mm)
- Max Roll Diameter: 5.00" (127 mm)
- Media Thickness: 0.003" (0.08 mm) - 0.0075" (0.19mm)
- Supported Linear barcodes: Code 39, Code 128A, B & C (User selectable/Auto), UCC/EAN-128, Code 93, Codabar, Interleaved 2 of 5, UPC-A, UPC-E, UPC-A with 2 and 5 add on, UPC-E with 2 and 5 add on, EAN 13, EAN 8, EAN 13 with 2 and 5 add on, EAN 8 with 2 and 5 add on, Postnet (5, 9, 11, & 13 digit)

Part Number	Description
CUSTLABEL	Custom Label Programming. Design and set up of custom label for a plug and play system. See custom label worksheet on following pages
DT2PRINTER-1 <b>Scales Only</b>	2" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above
DT4PRINTER-1 <b>Scales Only</b>	4" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above
DTR2PRINTER-1 <b>Scales Only</b>	2" Direct thermal receipt printer. Includes 6' scale to printer cable.
DT2PRINTER-2 <b>Indicators Only</b>	2" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above
DT4PRINTER-2 <b>Indicators Only</b>	4" Direct thermal barcode label printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above
DTR2PRINTER-2 <b>Indicators Only</b>	2" Direct thermal receipt printer. Includes 6' scale to printer cable. For custom label program see part# CUSTLABEL above



# PENNSYLVANIA **PRINTER APPLICATION GUIDE**

## 7600 SCALE & INDICATOR CUSTOM LABEL DESIGN WORKSHEET

Use this worksheet to detail your scale printing application then contact the sales or service departments for a Pennsylvania Scale Printing System for a quotation



### **Label Size**

- |                                  |                                  |                                      |
|----------------------------------|----------------------------------|--------------------------------------|
| <input type="checkbox"/> 2" X 1" | <input type="checkbox"/> 2" X 4" | <input type="checkbox"/> 4" X 5"     |
| <input type="checkbox"/> 2" X 2" | <input type="checkbox"/> 4" X 2" | <input type="checkbox"/> 4" X 6"     |
| <input type="checkbox"/> 2" X 3" | <input type="checkbox"/> 4" X 3" | <input type="checkbox"/> Tape        |
|                                  | <input type="checkbox"/> 4" X 4" | <input type="checkbox"/> OTHER _____ |

### **Data Points on Label**

- Weight Only – Human Readable/ Barcode/ Both
- Weight & Current Units - Human Readable/ Barcode/ Both
- Gross/Net/Tare - Human Readable/ Barcode/ Both
- Product ID - Human Readable/ Barcode/ Both
- Piece Weight - Human Readable/ Barcode/ Both
- Count - Human Readable/ Barcode/ Both
- Time and Date - Human Readable/ Barcode/ Both
- % of Error or Accuracy - Human Readable/ Barcode/ Both
- Other \_\_\_\_\_ - Human Readable/ Barcode/ Both
- Barcode Type: Code 39 | Code 128C Code 128A | Code 128B | Code 128 Auto Switching | Code EAN128 | Code Interleaved 2 of 2 | UPC | Interleaved 2 of 5 mod 10 | Other \_\_\_\_\_

### **Barcode Scanning**

- Into scale with embedded commands
- By a third-party system – please detail if data only or if embedded commands (Prefix/Suffix) are required and the format

Illustrate your special label request

# PENNSYLVANIA PRINTER APPLICATION GUIDE

## 7800 Scale & Indicator Custom Label Design Worksheet

Use this worksheet to detail your scale printing application then contact the sales or service departments for a Pennsylvania Scale Printing System for a quotation



### Label Size

- |                                  |                                  |                                      |
|----------------------------------|----------------------------------|--------------------------------------|
| <input type="checkbox"/> 2" X 1" | <input type="checkbox"/> 2" X 4" | <input type="checkbox"/> 4" X 5"     |
| <input type="checkbox"/> 2" X 2" | <input type="checkbox"/> 4" X 2" | <input type="checkbox"/> 4" X 6"     |
| <input type="checkbox"/> 2" X 3" | <input type="checkbox"/> 4" X 3" | <input type="checkbox"/> Tape        |
|                                  | <input type="checkbox"/> 4" X 4" | <input type="checkbox"/> OTHER _____ |

### Data Points on Label

- Weight Only – Human Readable/ Barcode/ Both
- Weight & Current Units - Human Readable/ Barcode/ Both
- Gross/Net/Tare - Human Readable/ Barcode/ Both
- Product ID - Human Readable/ Barcode/ Both
- Description – Human Readable/ Barcode/ Both
- Custom Data Field 1 - Human Readable/ Barcode/ Both
- Custom Data Field 2 - Human Readable/ Barcode/ Both
- Custom Data Field 3 - Human Readable/ Barcode/ Both
- Piece Weight - Human Readable/ Barcode/ Both
- Count - Human Readable/ Barcode/ Both
- Time and Date - Human Readable/ Barcode/ Both
- % of Error or Accuracy - Human Readable/ Barcode/ Both
- Checkweigh Values
- Other \_\_\_\_\_ - Human Readable/ Barcode/ Both
- Barcode Type: Code 39 | Code 128C Code 128A | Code 128B | Code 128 Auto Switching | Code EAN128 | Code Interleaved 2 of 2 | UPC | Interleaved 2 of 5 mod 10 | Other \_\_\_\_\_

### Barcode Scanning

- Into scale with embedded commands
- By a third party system – please detail if data only or if embedded commands (Prefix/Suffix) are required and the format

Illustrate your special label request

# PENNSYLVANIA COMMUNICATION APPLICATION GUIDE



**ENHANCE OPERATIONAL INSIGHT WITH PENNSYLVANIA SCALE COMMUNICATION OPTIONS. EFFECTIVELY UNCOVER COMPREHENSIVE OPERATIONAL INTELLIGENCE THROUGH OUR WEIGHING AND COUNTING SYSTEMS. FROM VITAL METRICS AND VALUABLE DATA, OUR SCALES PROVIDE AN ACCURATE AND FULL VIEW OF YOUR OPERATION**

Maximize your business efficiency with Pennsylvania Scale Company's cutting-edge weighing and counting scale systems. Our solutions are pivotal in enhancing accuracy, minimizing shrinkage, and streamlining operations, while empowering your management team with actionable real-time data. Our scale systems seamlessly interface with a diverse range of devices, including barcode label printers, scanners, Windows PC, iOS data collection systems, Android, iPad, and an array of third-party software and systems. This unparalleled flexibility stems from our exceptional standard and optional communication interfaces, ensuring seamless integration into your existing infrastructure. Elevate your company's performance and drive bottom-line growth with our adaptable and high-performance scale solutions.

## ***EtherNet/IP***

Ethernet/IP is the fastest growing digital communication protocols in industrial automation, continuing to gain wider acceptance as companies look to transition from legacy protocols and analog to ethernet networks. The Pennsylvania Scale Ethernet IP option is truly unique in that scale HMI. Settings are presented in a user-friendly, human-readable format for easy comprehension.



## ***Wired Ethernet TCP/IP***

It is hard to find a company that does not have a local area network (LAN) used for email, internet access and sharing data from multiple users. Wired Ethernet is the most robust and common type of LAN and provides secure high speed data transmission with multiple devices and across large distances.



## ***Wi-Fi TCP/IP***

Wi-Fi has all of the inherit capabilities of Wired Ethernet with the added benefit of wireless communication and no need to run cables and install multiple network switches. Wi-Fi does need a LAN architecture that provides wireless access points to supply coverage throughout the facility or at least in the area the scale will be used.



# PENNSYLVANIA COMMUNICATION APPLICATION GUIDE



## **USB Virtual Com Port**

USB ports are standard on most PC's and are a tried-and-true method to create a peer-to-peer connection of a scale to a computer. Typically, Windows or the operating system will assign a Virtual Comport to the connection and then the software program is configured to receive data on that specific comport.



## **USB HID (Human Interface Device)**

HID performs the same as if a normal keyboard was plugged into the PC and the scale data output is entered in the open program same as if it was manually typed on a keyboard. This is an ideal and simple solution for sending scale data directly into a program running on a PC. This is the easiest and best solution for direct interface from a scale to a program that is not designed to work directly to a scale



## **Bluetooth Virtual Com and HID**

In the simplest terms, Bluetooth is the technology that enables exchange of data between devices within a short amount of distance. What separates Bluetooth radio waves from other wireless devices is that it is designed for very short-range communications. In the Virtual Comport mode, the PC or device connected assigns a virtual comport number just like the USB virtual comport connection. In HID mode the PC or device connected as if a normal wireless Bluetooth keyboard was connected, and the scale data output is entered in the open program same as if it was manually typed on a keyboard.



## **RS-232**

RS-232 is a standard communications protocol used mainly to transmit data peer to peer, scale to PC or scale to Printer or barcode scanner to scale. The Pennsylvania Scale RS-232 is a bi-directional interface that allows the Scale Indicator to not only send data, but also receive commands or enter scale data from computers, barcode scanners and other devices.



## **Analog Output 4-20 mA, 0-10 VDC**

Analog Output is used to communicate with PLC's (programmable logic controllers) and other devices that can receive an analog signal and perform a process control function based upon the signal. The Pennsylvania Scale Analog Output option can be configured for 4-20ma or 0-10 VDC and is software controlled. When the scale is calibrated, it automatically will output 4 ma or 0 VDC with no weight on the scale, 20 ma or 10 VDC with full capacity on the scale and a proportional signal between those two points.

# PENNSYLVANIA COMMUNICATION APPLICATION GUIDE

## Label Printing, Human Readable, Barcode or Both.

The Pennsylvania Scale barcode, label and tape printers offer outstanding performance, reliability and flexibility to meet the demands of industrial scale printing applications. Ideal for all non-washdown applications such as: packaging, production, warehousing, shipping and receiving printing needs. Direct thermal print technology provides high quality labels time after time. Whether it is a basic label format or A custom label Design, We can Provide a true plug and play setup and installation for most labeling applications.



## Choosing the Best Pennsylvania Scale Model for your Scale Communication Needs

PA SCALE MODEL	7300 SCALE	7500 SCALE OR INDICATOR	7600 SCALE OR INDICATOR	7800 SCALE OR INDICATOR
PRODUCT ID OR PART NUMBER	NO	NO	YES 6 DIGIT NUMERIC	ALPHANUMERIC 32 CHARACTERS
PRODUCT DESCRIPTION	NO	NO	NO	ALPHANUMERIC 32 CHARACTERS
USER DEFINED DATA FIELDS	NO	NO	NO	THREE USER DEFINED AND LABELED DATA FIELDS
WEIGHT INFORMATION	GROSS WEIGHT	GROSS WEIGHT	GROSS, NET, TARE	GROSS, NET, TARE
COUNT INFORMATION	NO	PIECE COUNT	PIECE COUNT	PIECE COUNT
PIECE WEIGHT	NO	NO	YES	YES
% OF ACCURACY	NO	NO	YES	YES
OUTPUT OR INPUT DATABASE	NO	NO	NO	YES
TIME AND DATE	NO	NO	YES	YES
BASE IN USE	NO	NO	YES	YES
NUMBER OF COMPORTS	ONE	ONE	ONE	TWO, INDEPENDENTLY CONFIGURED

*We are the scale communication, label printing and interface to third party software experts. Leverage our years of experience to work for you on your next scale communication application.*



# LOAD CELL SIMULATORS

**LOAD CELL SIMULATORS SIMPLIFY AND STREAMLINE THE PROCESS OF TESTING, TROUBLE SHOOTING AND VERIFYING CONFIGURATION AND SET UP WEIGHING OR COUNT WEIGH SCALE SYSTEMS.**

A must have for any scale technician or maintenance team member to accurately test and diagnose weighing and counting scale systems. Pennsylvania Scale offers two outstanding models MADE IN THE USA providing a wide range of useful load cell signals, simulating the changing signal from a load cell as the weight varies. It can be used to simulate any pressure, torque, or force load cell whose output is measured in millivolts.



## 61400 LOAD CELL FEATURES

- Simplified design for basic trouble shooting and testing
- ABS Plastic Case 2"W, 1.25"L and .75"H
- Screw Terminal Connections for +EX, +SI, -SI, -EX and Shield
- Slide Switch range selection for 0.0mV/V, 0.5mV/V and 1mV/V
- Simple, easy to use and economical tool for troubleshooting a weigh or count system or testing stability of indicators

## 61401 LOAD CELL FEATURES

- Advanced design for sophisticated and in-depth trouble shooting and testing
- 2" W, 3.5"L and 2"H
- Screw Terminal Connections for +EX, +SI, -SI, -EX and Shield
- Selectable modes of VERNIER, FIXED and ZERO
- Slide Switch range selection for 0.0mV/V, 0.5mV/V and 1mV/V
- Selectable Polarity of NORMAL or INVERTED



Part Number	Description	List Price	Price Code
61400	Basic Load Cell Simulator	\$55	C
61401	Advanced Load Cell Simulator	\$135	C

# PENNSYLVANIA 6400 BASE STAND APPLICATION GUIDE

HEIGHT-ADJUSTABLE 6400 BASE STANDS TO WEIGH OR COUNT HEAVY PARTS WITH EASE AT AN ERGONOMIC HEIGHT, PREVENTING EMPLOYEE STRAIN AND INJURY AND INCREASING OUTPUT



## FEATURES

- Easily Integrate into and existing conveyor for increased throughput and accuracy.
- Built with high strength aluminum that is light weight, durable and corrosion resistant. Available for the 18" X 18" and 24" X 24" 6400 base.
- Adjustable from 24" to 30" height, Including base, 29" to 35"
- Easy and fast field installation includes all assembly and mounting hardware.

Part Number	Description
56780H	6400 Base Adjustable Stand for 24" X 24" or 24" X 30" base
56780H-1	6400 Base Adjustable Stand for 18" X 18" or 18" X 24" base
56727-7	18" Column Mounts to 18" X 24" and 24" X 24" bases. Top Flange fits all indicators in 7X00 series and scale shelf below
56731-1	Scale shelf - Mounts to any column flange, fits all 7X00 bench scales, ¼" LIP – ideal for dual base counting systems

# PENNSYLVANIA ROLLER CONVEYOR APPLICATION GUIDE

---



A ROLLER CONVEYOR OPTION IS THE IDEAL CHOICE FOR INTEGRATING A RUGGED, RELIABLE AND ACCURATE PENNSYLVANIA SCALE COUNTING OR WEIGHING SYSTEM INTO HIGH VOLUME PRODUCTION, WAREHOUSING OR SHIPPING OPERATIONS. DESIGNED FOR EFFICIENT MATERIAL HANDLING AND ELIMINATING THE NEED TO LIFT HEAVY AND OVERSIZED PACKAGES ALLOWING FOR HIGH VOLUME THROUGHPUT AND EXTREMELY ACCURATE WEIGHING OR COUNTING.





## FEATURES

- Heavy Duty Aluminum Rails and Rollers, will not rust
- Rated for 300% X Scale Capacity
- Available in 1.5" and 3" center to center configuration

# PENNSYLVANIA ROLLER CONVEYOR APPLICATION GUIDE

## Roller Conveyor Dimensions

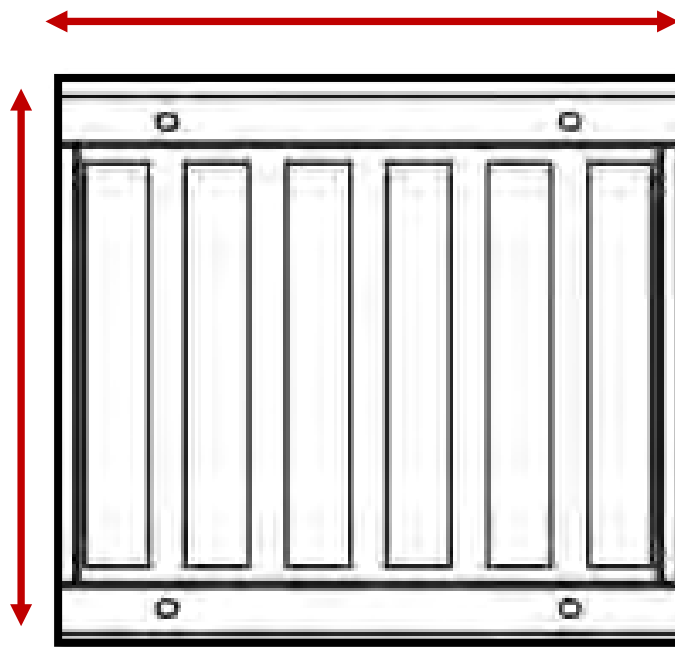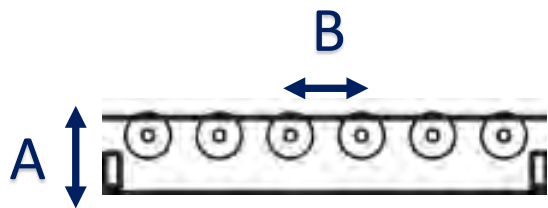

Part Number	A	B	C	D
56784-5	2.5"	1.5"	12"	15"
56784-1	2.5"	3"	24"	24"
56784-2	2.5"	1.5"	24"	24"
56784-3	2.5"	3"	18"	18"
56784-4	2.5"	1.5"	18"	18"

Part Number	Description
7800-XXXHR RT	Roller conveyor option for scale with 12" X 14" roller conveyor option. High strength lightweight roller conveyors, 1.25" diameter rollers, 1.5" center to center spacing Available in 50 lbs. capacity and higher only.
7600-XXXHR BT	Roller conveyor option for scale with 12" X 14" roller conveyor option. High strength lightweight roller conveyors, 1.25" diameter rollers, 1.5" center to center spacing Available in 50 lbs. capacity and higher only.
7500-XXXHR BT	Roller conveyor option for scale with 12" X 14" roller conveyor option. High strength lightweight roller conveyors, 1.25" diameter rollers, 1.5" center to center spacing Available in 50 lbs. capacity and higher only.
7300-XXXHR BT	Roller conveyor option for scale with 12" X 14" roller conveyor option. High strength lightweight roller conveyors, 1.25" diameter rollers, 1.5" center to center spacing Available in 50 lbs. capacity and higher only.
7000-XXXHR BT	Roller conveyor option for scale with 12" X 14" roller conveyor option. High strength lightweight roller conveyors, 1.25" diameter rollers, 1.5" center to center spacing Available in 50 lbs. capacity and higher only.
M6400-1818-XXXHR RT3	Roller Conveyor Option for 6400 18" X 18" Base. High strength Aluminum, 2.75"(H) X 18"(D) X 18" (W). 1.25" Rollers with 3" Spacing
M6400-1818-XXXHR RT1	Roller Conveyor Option for 6400 18" X 18" Base. High strength Aluminum, 2.75"(H) X 18"(D) X 18" (W). 1.25" Rollers with 1.5" Spacing
M6400-2424-XXXHR RT3	Roller Conveyor Option for 6400 24" X 24" Base. High strength Aluminum, 2.75"(H) X 24"(D) X 24" (W). 1.25" Rollers with 3" Spacing

# PENNSYLVANIA STACK LIGHTS APPLICATION GUIDE

AVAILABLE ONLY ON THE 7600 AND 7800 COUNTING SCALE OR INDICATOR  
SUITABLE FOR NON-WASHDOWN APPLICATIONS, FOR WASHDOWN OR WET  
ENVIRONMENT APPLICATIONS PLEASE CONTACT THE SALES DEPARTMENT  
FOR QUOTATION



## FEATURES

- Ideal for quality control, count or weight verification and tank level monitoring
- Available with 1,2 or 3 lights and embedded audible buzzer alarm
- Factory tested, configured and ready for use with minimal assembly
- 12VDC supplied from scale or indicator – no need for external power source.
- Each light and Buzzer independently programmed with count or weight values
- High visibility LED lights and 90 DB Buzzer, Each light segment 2" in diameter, and 2" tall

Part Number	Description
7600-XXXHR SLA1	7600 Scale Alarm Stack light 1 Lights, Red and Buzzer Alarm. 2" Diameter, 16" High.
7600-XXXHR SLA2	7600 Scale Alarm Stack light 2 Lights, Red, Green and Buzzer Alarm. 2" Diameter, 18.75" High.
7600-XXXHR SLA3	7600 Scale Alarm Stack light 3 Lights, Red, Green, Yellow and Buzzer Alarm. 2" Dia. 21" High.
7800-XXXHR SLA1	7800 Scale Alarm Stack light 1 Lights, Red and Buzzer Alarm. 2" Diameter, 16" High.
7800-XXXHR SLA2	7800 Scale Alarm Stack light 2 Lights, Red, Green and Buzzer Alarm. 2" Diameter, 18.75" High.
7800-XXXHR SLA3	7800 Scale Alarm Stack light 3 Lights, Red, Green, Yellow and Buzzer Alarm. 2" Dia. 21" High.
7600/4 SLA1	7600 Indicator Alarm Stack light 1 Lights, Red and Buzzer Alarm. 2" Diameter, 16" High.
7600/4 SLA2	7600 Indicator Alarm Stack light 2 Lights, Red, Green and Buzzer Alarm. 2" Diameter, 18.75" High.
7600/4 SLA3	7600 Indicator Alarm Stack light 3 Lights, Red, Green, Yellow and Buzzer Alarm. 2" Dia. 21" High.
7800 SLA1	7800 Indicator Alarm Stack light 1 Lights, Red and Buzzer Alarm. 2" Diameter, 16" High.
7800 SLA2	7800 Indicator Alarm Stack light 2 Lights, Red, Green and Buzzer Alarm. 2" Diameter, 18.75" High.
7800 SLA3	7800 Indicator Alarm Stack light 3 Lights, Red, Green, Yellow and Buzzer Alarm. 2" Dia. 21" High.



## TERMS CONDITIONS AND WARRANTIES

All Rights Reserved Pennsylvania Scale 2023. Not responsible for typographical errors. Prices and conditions are subject to change without notice. While every attempt has been made to accurately reflect the specifications of Pennsylvania Scale Company products, we cannot be responsible for errors. We reserve the right to make changes to the design at any time for the purpose of continuous improvement.

### TERMS:

Credit card or prepayment. Net 30 days with prior approval/accounts in good standing only. CREDIT CARDS: Receipts are provided by FAX for all credit or debit card orders. Please note the charge will appear on your invoice under the heading 'The A.H. Emery Company (dba) Pennsylvania Scale Company'.

### MINIMUM BILLING:

\$50 for resellers – strictly enforced

### RESTOCKING FEE:

15% of NET COST to cover the cost of rechecking, restocking, and repackaging unused equipment. Items that are used but deemed defective will be covered under the standard terms of our Limited Warranty policy.

### SHIPPING DAMAGE:

Products are sold FOB Shipping Point, e.g. factory in Lancaster, Pennsylvania. While we warrant that the items have been packed appropriately and securely using reasonable care, we cannot be liable for shipping damage caused by the carrier. Further, it is the responsibility of the receiver to file a claim with the carrier and to note damage to the Bill of Lading.

### FREIGHT VOLUME DISCOUNTS:

Prepay & Add shipments may include a minimal and reasonable service fee. Note: Beware of other suppliers that do not pass along the freight volume discount when freight is billed. Pennsylvania Scales' policy regarding freight could result in a significant cost savings to your customer and provide an important cost advantage when the landed cost of the product is determined.

### DROP SHIPMENTS:

No added fee for drop shipping products. Applicable state taxes will be added.

### MATCHING/FACTORY CALIBRATION:

Matching of Pennsylvania Scale indicators and platforms when ordered as a system is n/c. Matching a non -Pennsylvania Scale indicator to a Pennsylvania platform prior to shipping is available at the net cost of \$100.

**US\$:** All prices are quoted in US DOLLARS. Items ship NAFTA Free Trade to our North American business partners.

### DEFINITIONS:

– A distributor is a reseller, regularly engaged in the calibration, support, sales, and service of Pennsylvania Scale products. In the course of business, a distributor stocks equipment and basic replacement parts, maintains a library of technical info, and provides field support/warranty support if needed. A distributor in good standing receives a significant trade discount as compensation for customer provided value to the chain of distribution. A minimum sales quota is required to maintain distributor standing and max discount.

## **TERMS CONDITIONS AND WARRANTIES**

### **DEFINITIONS:**

– A distributor is a reseller, regularly engaged in the calibration, support, sales, and service of Pennsylvania Scale products. In the course of business, a distributor stocks equipment and basic replacement parts, maintains a library of technical info, and provides field support/warranty support if needed. A distributor in good standing receives a significant trade discount as compensation for customer provided value to the chain of distribution. A minimum sales quota is required to maintain distributor standing and max discount.

– A dealer is a reseller but does not stock basic service parts, is functioning as a commissioned broker for the company's products, and is not engaged in the continuous and proactive promotion and sale of the company's products. A dealer receives a resale discount commensurate with actual value provided to the customer experience and commitment to Pennsylvania Scale based on dollar sales volume.

– Like all other manufacturers, Pennsylvania Scale may, at its discretion, establish relationships with OEMs (original equipment manufacturers), municipalities, vertical resellers, or national accounts for competitive vertical market access to Pennsylvania Scale products.

### **WARRANTIES:**

The parts and components of these Pennsylvania Scale Company products are warranted for four years from the date of retail delivery against defects in materials and workmanship, subject to the terms and conditions of our standard warranty.





[www.pascale.com](http://www.pascale.com)

2025 All Rights Reserved. Prices, Terms and specifications subject to change without notice. Not responsible for typographical errors