



Pricelist 2024

Bench and Floor Scales

Vessel and Silo Scales



Valid from 8/1/2024 Version 3.0

This price list replaces the previous version.

Minebea
intec
The true measure

On the Web: www.minebea-intec.com
 Minebea Intec Directory
 Intec Main: 866-963-8587
 Sales: ext 8127
 Customer Service: ext 8124
 Tech Support: ext 8125
 Fax: 631-942-0162
 Order entry email: orders.us@minebea-Intec.com

Table of Contents

NEW
 NEW
 NEW

Combics Complete	Page 4
Combics Indicator IP44	Page 5
Combics Indicator IP69K	Page 6
NEW MiNexx 3000 Platform, Painted	Page 9
NEW MiNexx 3000 Platform, Stainless Steel	Page 10
NEW MiNexx 3000 Platform OPTIONS, Stainless Steel	Page 11
Combics Platform, Painted, Non-verified; 30,000d(imperial Sizes) and 60,000d (Metric Sizes)	Page 14
Combics Platform, Stainless Steel; Non-verified; 30,000d (Imperial Sizes)	Page 15
Combics Platform & OPTIONS, Stainless Steel, Non-verified; Metric sizes (30,000d)	Page 16
Combics Platform Spare Parts (Imperial Sizes)	Page 18
Minebea Intec OPCUA Server	Page 19
Midrics Complete Scales, Metric; Non-verified; Painted & Stainless Steel	Page 20
Midrics Complete Scales, Metric; Measurement Canada; Painted & Stainless Steel	Page 21
Midrics Indicators; NTEP; (IP65)	Page 22
Midrics Indicator OPTIONS & Accessories	Page 23
Midrics Bench Scales; Metric; Non-verified; Painted & Stainless Steel (15,000d)	Page 24
Midrics Painted Floor Scales (MAPP4U); Painted; NTEP	Page 25
Midrics Extend; Painted & Stainless Steel; Non-verified (30,000d)	Page 26
Signum Supreme, Painted (SIWSDCP)	Page 27
Signum Advanced, Painted High Resolution (SIWABBP)	Page 28
Signum Advanced (SIWADCP)	Page 29
Signum Advanced Extend (SIWAEDG)	Page 31
Signum Regular Painted (SIWRDCP)	Page 32
Signum Supreme High Resolution, Painted (SIWSBBP)	Page 35
Signum Options & Accessories	Page 36
IFP4 Flat Bed Scales ,Painted; Non-verified (30,000d)	Page 39
IFP4 Flat Bed Scales ,Painted; Options	Page 41
IFS4 Flat Bed Scales, Stainless Steel; Non-verified (30,000d)	Page 42
IFS4 Flat Bed Scales, Stainless Steel; Options	Page 44
IS Series Platforms	Page 46
Printers and Accessories	Page 49
Handheld Barcode Scanners and Bluetooth	Page 50
NEW Combics 2 Indicators for hazardous areas (CAIXS2); NTEP; FM Approval; CA Measurement	Page 51
NEW Midrics 1 EX Indicator for hazardous areas (MIXS1); FM Approval (USA & Canada)	Page 52
NEW Combics Platforms FM Approved; Imperial Sizes; Stainless Steel; Non-verified	Page 53
Combics Platforms FM Approved; Metric Sizes; Stainless Steel; Non-verified; & Options	Page 54
IFXS4 Flat Bed platforms for hazardous areas; Stainless Steel; Non-verified; 30000d	Page 55
IFXS4 Flat Bed platforms for hazardous areas; Options	Page 57
Signum Supreme Ex Scales for hazardous areas	Page 59

Table of Contents Continued

NEW OFFERINGS

NEW OFFERINGS
NEW OFFERINGS
NEW OFFERINGS
NEW OFFERINGS

NEW

NEW

Novego (PR6261) Hygienic Compression Load Cell	Page 61
Inteco®(PR6203) Compression Load Cell	Page 62
PR6201 Compact Compression Load Cell	Page 63
PR 6221 - Weighbridge Load Cell	Page 65
Pendeo® Truck PR 6224B - Digital Weighbridge Load Cell	Page 66
Digital Converter Connexx (Extension of many loadcells to a digital solution)	Page 67
PR6211 Compact Compression Load Cell	Page 68
PR6212 Compact Compression Load Cell	Page 69
PR6202 Hygienic Precision Compression Load Cell	Page 71
PR6241 Contego® Hygienic Load Cell and Mount	Page 73
PR6241 Compression S-Type Load Cell	Page 74
PR6246 Tension S-Type Load Cell	Page 76
PR6251 Pancake Level Sensor	Page 78
PR40; PR43; Single Point Load Cells	Page 79
PR47; PR53; PR54; Single Point Load Cells	Page 80
PR55; PR57; PR58 Single Point Load Cells	Page 81
PR77; MP97 Mounting Kit	Page 82
LC Nito® PR79 Beam Type Load Cells; Feet and Mounting Kits	Page 83
Tigo® PR76 Tension S Type Load Cells	Page 84
Junction Boxes	Page 85
Load Cell Cables	Page 86
PR5900 Maxxis 5 Process Controller Pre-Configured	Page 87
PR5900 Maxxis 5 Process Controller Built to Order	Page 88
PR5500 Maxxis 4 System Controller Pre-Configured	Page 90
PR5500 Maxxis 4 System Controller Built to Order	Page 91
X3 Process Indicator & PR5110 Remote Displays	Page 92
X2 Weight Indicator	Page 93
PR5230 Transmitters in Field Housing, Pre-Configured	Page 94
PR5230 Process Transmitter in Field Housing Built to Order	Page 95
PR5220; PR5215; MP20 Transmitters	Page 96
MP30; MP26 Transmitters	Page 97
CSD Weight Transmitters	Page 98
PR8501 Pro Recipe XT	Page 99

Partner	Level
Platforms and Indicators- Midrics / Puro / MiNexx 3000 Combics / Combics EX / Midrics 1 EX	
Signum Scales IF Hygienic Low Profile Floor Scales; IS Digital Platforms	
Hazardous Area Platforms: IFX Low Profile Floor Scales, Signum (SIWX); Pro Recipe XT Software	
Tank and Hopper/Vessel load Cells/ Tank and Hopper Transmitters and Process Controllers	
Accessories (IS & TH)	

Combics Complete Scales (CAW) Imperial Sizes

Combics Mild Steel Platform with CAISL2-U Indicator


Order no.	Dimensions (LxW) (in.)	Capacity		Readability		Platform Cable (ft.)	Shipping Weight (lb.)	Price in USD
		(lb.)	(kg)	(lbs.)	(kg)			
CAW2P1U-10CC-I	10x10	15	6	0.0005	0.0002	10	20	\$2,323
CAW2P1U-50DD-I	12x12	60	30	0.002	0.001	10	24	\$2,424
CAW2P1U-100EE-I	18x18	150	60	0.005	0.002	10	65	\$2,863
CAW2P1U-250GG-I	24 x 24	300	150	0.01	0.005	10	120	\$4,713

Combics Stainless Steel Platform with CAIS2-U Indicator

Order no.	Dimensions (L x W) (in.)	Capacity		Readability		Platform Cable (ft.)	Shipping Weight (lb.)	Price in USD
		(lb.)	(kg)	(lb.)	(kg)			
CAW2S1U-10CC-I	10 x 10	15	6	0.0005	0.0002	10	22	\$3,064
CAW2S1U-50DD-I	12 x 12	60	30	0.002	0.001	10	30	\$3,256
CAW2S1U-100EE-I	18 x 18	150	60	0.005	0.002	10	68	\$3,967
CAW2S4U-250GG-I	24 x 24	300	150	0.01	0.005	10	127	\$8,596

Accessories: Combics Complete Benchtop Scales (Imperial Sizes)

Order no.	Description	Price in USD
YDH03CISUS	Column, Stainless Steel 43" floor mounted	\$444
YBP03CISUS	Base for installing floor-mounted column, stainless steel (4 struts)	\$302
YPP01CWS	Plate for attaching indicator and printer to bench stand	\$338
YDH01CWSUS	Post mount assembly for Combics 10"x10" platforms, 13" High; Stainless Steel	\$326
YDH02CWSUS	Post mount assembly for Combics 12"x12" platforms, 19" High; Stainless Steel	\$337
YDH03CWSUS	Post mount assembly, for Combics 18"x18" platforms, 29"High; Stainless Steel	\$398
YDH12CWSUS	Stainless Steel Indicator Bracket for Benchtop Imperial size Combics 10x10, 12x12, and 18x18"; also, Midrics & Combics metric size platforms DC, ED and FE. Will also work with SIWAEDG platforms	\$143
YDH02CISUS	Bracket for Indicator; wall mounting, tiltable, stainless steel	\$120
YAS07CI	Panel (cabinet) mount kit, with gasket, for all Combics indicators	\$411



Combics Indicator CAISL (IP44)



Measurement
Canada

Order no. Combics 1 Indicator		Price in USD
CAISL1-U	Combics 1 Indicator, Display LCD, backlit with 20mm weight value, Standard data interface RS232 via D-SUB 25-pin connector. Material: stainless steel. Ingress protection: IP44, Combics Indicators are Class III NTEP & Canadian Measure approved	\$1,369

Combics 2 Indicator		Price in USD
CAISL2-U	Combics 2 Indicator, Display LCD, backlit with 20mm weight value Integrated LED's for checkweighing (red-green-yellow). Standard data interface RS232 via D-SUB 25-pin connector, PS/2 connector. Basic-Applications: Weighing, counting, animal weighing, checkweighing, sorting (3 or 5 classes), totalizing, net-total, averaging, weighing in percent, neutral measurement. Material: stainless steel. Ingress protection: IP44, Combics Indicators are Class III NTEP & Canadian Measure approved	\$1,706

Combics 3 Indicator		Price in USD
CAISL3-U	Combics 3 Indicator, Dot-matrix display, backlit, weighing data with status indicators, Integrated LED's for checkweighing (red-green-yellow). Standard 2 data interfaces RS232 via D-SUB 25-pin/ D-SUB 9-pin connector, PS/2 connector Basic-Applications: Weighing, counting, animal weighing, checkweighing, sorting (3 or 5 classes), totalizing, net-total, averaging, weighing in percent, neutral, measurement. more application as option. Material: stainless steel. Ingress protection: IP44, Combics Indicators are Class III NTEP & Canadian Measure approved	\$2,273

Combics Indicators for direct connection with Minebea Intec Digital IS platforms		
Model no.	Description	Price in USD
CAISL1-UV1	Combics 1 Indicator, pre-wired for direct connection to IS Digital platform Display, LCD, backlit with 20mm weight value, Standard data interface RS232 via D-SUB 25-pin connector. Material: stainless steel. Ingress protection: IP44 , Combics Indicators are Class III NTEP & Canadian Measure approved	\$1,919
CAISL2-UV1	Combics 2 Indicator, pre-wired for direct connection to IS Digital platform, Display LCD, backlit with 20mm weight value Integrated LED's for checkweighing (red-green-yellow). Standard data interface RS232 via D-SUB 25-pin connector, PS/2 connector. Basic-Applications: Weighing, counting, animal weighing, checkweighing, sorting (3 or 5 classes), totalizing, net-total, averaging, weighing in percent, neutral measurement. Material: stainless steel. Ingress protection: IP44, Combics Indicators are Class III NTEP & Canadian Measure approved	\$2,233
CAISL3-UV1	Combics 3 Indicator, pre-wired for direct connection to IS Digital platform, Dot-matrix display, backlit, weighing data with status indicators, Integrated LED's for checkweighing (red-green-yellow). Standard 2 data interfaces RS232 via D-SUB 25-pin/ D-SUB 9-pin connector, PS/2 connector Basic-Applications: Weighing, counting, animal weighing, checkweighing, sorting (3 or 5 classes), totalizing, net-total, averaging, weighing in percent, neutral, measurement. More application as option. Material: stainless steel. Ingress protection: IP44 , Combics Indicators are Class III NTEP & Canadian Measure approved	\$2,698



Combics 1 indicator



Combics 2 indicator



Combics 3 indicator



Combics Indicators CAIS (IP69K)



Measurement
Canada

Order no. Combics 1 Indicator		Price in USD
CAIS1-U	Combics 1 Indicator, Display LCD, backlit with 20mm weight value. Standard data interface RS232 via cable glands. Material: stainless steel. Ingress protection: IP69K, Combics Indicators are Class III NTEP & Canadian Measure approved	\$1,840

Combics 2 Indicator		
CAIS2-U	Combics 2 Indicator, Display LCD, backlit with 20mm weight value Integrated LED's for checkweighing (red-green-yellow). Standard data interface RS232, PS/2 via cable glands. Basic-Applications: Weighing, counting, animal weighing, checkweighing, sorting (3 or 5 classes), totalizing, net-total, averaging, weighing in percent, neutral measurement. Material: stainless steel. Ingress protection: IP69K, Combics Indicators are Class III NTEP & Canadian Measure approved	\$2,175

Combics 3 Indicator		
CAIS3-U	Combics 3 Indicator, Dot-matrix display, backlit, weighing data with status indicators, Integrated LED's for checkweighing (red-green-yellow). Standard 2 data interfaces RS232, PS/2 via cable glands. Basic-Applications: Weighing, counting, animal weighing, checkweighing, sorting (3 or 5 classes), totalizing, net-total, averaging, weighing in percent, neutral, measurement. more applications as option. Material: stainless steel. Ingress protection: IP69K, Combics Indicators are Class III NTEP & Canadian Measure approved	\$2,735

Combics IP69k Indicators Preconfigured for direct connection with Minebea Intec Digital IS platforms		
Model no.	Description	Price in USD
CAIS1-UV1	Combics 1 Indicator, pre-wired for direct connection to IS Digital platform, Display LCD, backlit with 20mm weight value. Standard data interface RS232 via cable glands. Material: stainless steel. Ingress protection: IP69K, Combics Indicators are Class III NTEP & Canadian Measure approved	\$2,208
CAIS2-UV1	Combics 2 Indicator, pre-wired for direct connection to IS Digital platform, Display LCD, backlit with 20mm weight value Integrated LED's for checkweighing (red-green-yellow). Standard data interface RS232, PS/2 via cable glands. Basic-Applications: Weighing, counting, animal weighing, checkweighing, sorting (3 or 5 classes), totalizing, net-total, averaging, weighing in percent, neutral measurement. Material: stainless steel. Ingress protection: IP69K, Combics Indicators are Class III NTEP & Canadian Measure approved	\$2,639
CAIS3-UV1	Combics 3 Indicator, pre-wired for direct connection to IS Digital platform, Dot-matrix display, backlit, weighing data with status indicators, Integrated LED's for checkweighing (red-green-yellow). Standard 2 data interfaces RS232, PS/2 via cable glands. Basic-Applications: Weighing, counting, animal weighing, checkweighing, sorting (3 or 5 classes), totalizing, net-total, averaging, weighing in percent, neutral, measurement. more applications as option. Material: stainless steel. Ingress protection: IP69K, Combics Indicators are Class III NTEP & Canadian Measure approved	\$3,146



Combics 1 indicator
CAISL1 and CAIS1



Combics 2 indicator
CAISL2 and CAIS2



Combics 3 indicator
CAISL3 and CAIS3



OPTIONS: Combics Indicator					
Order no.	Description	CAISL1	CAISL2/3	CAIS1/2/3	Price in USD
	UniCOM				
YDO02C-232	RS232 interface		•	•	\$682
YDO02C-485	RS422 or RS485 interface		•	•	\$682
YDO02C-DIO	Digital 5 Input / 5 Output opto isolated		•	•	\$1,071
YDO02C-AO	Analog current output, 0-20 mA, 4-20 mA, 0-10V, 16-bit		•	•	\$1,071
YDO02C-DP	Profibus DP module			•	\$1,592
YDO02C-DN	Device Net Interface			•	\$1,592
YDO02C-ETH	Ethernet TCP/IP and Modbus TCP interface			•	\$1,071
	WP1	CAIS(L)1	CAIS(L)2	CAIS(L)3	Price in USD
YDI02C-WPD	Interface (RS232/485) for a direct connection of a digital platform		•	•	\$423
YDI02C-WP03	ADC interface for analog Platform 2x 3.000e (30.000d)		•	•	\$356
	WP2	CAIS(L)1	CAIS(L)2	CAIS(L)3	Price in USD
YDI02C-WPD	Interface (RS232/485) for a direct connection of a digital platform		•	•	\$423
YDI02C-WP10	ADC interface for analog Platform 10.000e		•	•	\$627
ACCESSORIES: Combics Indicator					
Order no.	Connection cables for IP69K version (open ended cable to...)				Price in USD
YCC02-BR02	Connecting cable for bar code reader YBR05FC, - 5-pin DIN-female connector, 1 m				\$291
YCC02-D25F6	Connecting cable for accessories - 25 pin D-SUB female, 6m				\$291
YCC02-D25M6	Connecting cable for Minebea Intec scales, - 25-pin D-SUB male connector, 6 m				\$291
YCC02-D09F6	Connection cable for printer YDP21 or PC, open cable ends to 9-pin D-Sub female connector, 6m				\$291
YCC02-D09M6	Connection cable for printer YDP05, ZD421d/t, open cable ends to 9-pin D-Sub male connector, 6m				\$291
YCC02-R12M6	Connecting cable for Minebea Intec scales, - 12-pin round male connector, 6 m				\$291
YCC02-R12F6	Connecting cable for accessories and IS platforms, - 12-pin round female connector, 3 m				\$291
YCC02-RELAIS02	Connecting cable to open ended cable, 6 m				\$291
YCC02-RJ45M7	Ethernet connecting cable with RJ45 male connector, 7 m				\$291
Order no.	Power Supply				Price in USD
YAS02MI	24V industrial power supply module				\$283
Order no.	Printers				Price in USD
YDP21-US	Needle high speed matrix printer up to 57 mm paper width with internal power supply 115V (US)				\$1,355
ZD421d	Strip or label printer, prints barcodes with direct thermal printer head up to 108 mm paper width with external power supply 115V (US)				\$3,527
Order no.	Barcodes, Relay boxes and Others				Price in USD
YBR03CISL	Barcode reader with 25 pin D-SUB male connector				\$1,838
YDC01CI	Dust covers (2 units)				\$96
YAS01CISL	IP65 upgrade kit for cable connectors (D-Sub 25), 3 covers				\$342
YAS99I	Connection kit - male and female connector for connecting an analog platform to an indicator (disconnectable plug-in)				\$393
YSB01	Relay box for connecting scales to external control units, with 4 relay outputs (230/3A) and 1 opto coupler input (0-30V)				\$902
YSB02	Digital input/output module for connecting Combics 3 to external control units, with 8 open collector outputs (50mA) and 7 TTI-compatible inputs (0-30V)m, connecting cable YCC02-RELAIS 01/02 necessary				\$788

Combics Indicator Accessories Continued

Order no.	Cables for IP44 version (25 pin D-SUB male connector to...)	Price in USD
YCC02-BR02	Connecting cable for bar code reader YBR05FC, - 5-pin DIN-female connector, 1 m	\$291
YCC01-01CISLM3	Connecting cable for printer ZD421d (t) - 9-pin D-SUB male connector, 3 m	\$279
YCC01-10CIM3	9-pin D-SUB female connector, 1.5m connecting cable for PC	\$291
YCC01-02ISM3	Connecting cable for Minebea Intec scales, - 12-pin round male connector, 3 m	\$389
YCC01-03CISLM3	Connecting cable for accessory and IS platforms, - 12-pin round female connector, 3 m	\$366
YCC02-RELAIS01	Connecting cable to open ended cable, 6 m	\$291
YCC01-USBM2	Connecting cable from RS232 to USB-Connector, 2 m	\$277
YCC02-RB01	5-pin round male connector, 2m - connecting cable for external rechargeable battery pack YRB10Z	\$328
YCC05-001M5	9/25-pin D-SUB female, 5m	\$158
YCC05-001M10	9/25-pin D-SUB female, 10m	\$158
YCC05-001M15	9/25-pin D-SUB female, 15m	\$158

Order no.	Cables for Com 2 on CAISL3 (9 pin D-SUB male connector to.....)	Price in USD
YCC04-D25M6	Connecting cable for Minebea Intec scale - to 25-pin D-SUB male connector, 6 m	\$328
YCC04-R12M6	Connecting cable for Minebea Intec scale - to 12-pin round male connector, 6 m	\$328
YCC04-R12F6	Connecting cable for accessories and IS platforms - to 12-pin round female connector, 6 m	\$328
YCC04-D09M6	Connecting cable for printer YDP14/04 IS. - to 9-pin D-SUB male connector, 6 m	\$328
YCC04-D09F6	Connecting cable for printer YDP20 or PC - to 9-pin D-SUB female connector, 6 m	\$328

Order no.	Floor Mounted Columns	Price in USD
YDH03CISUS	Column, Stainless Steel 43" floor mounted	\$444
YBP03CISUS	Base for installing floor-mounted column, stainless steel (4 struts)	\$302
YBH01CWS	Retainer for bar code scanner, for attachment to bench stand	\$250
YPP01CWS	Plate for attaching indicator and printer to bench stand	\$338

Order no.	Column, for attaching indicator-platform- Imperial Sizes	Price in USD
YDH01CWSUS	Post mount assembly for Combics 10"x10" platforms, 13" High; Stainless Steel	\$326
YDH02CWSUS	Post mount assembly for Combics 12"x12" platforms, 19" High; Stainless Steel	\$337
YDH03CWSUS	Post mount assembly, for Combics 18"x18" platforms, 29"High; Stainless Steel	\$398

Order no.	Column, for attaching indicator-platform- Metric Sizes	Price in USD
YDH01CWS	Column, stainless steel, for attaching indicator to platform for 320x240(DC) Platform, height 330 mm	\$653
YDH02CWS	Column, stainless steel, for attaching indicator to platform, for sizes 400x300 (ED) and 500x400(FE), height 500 mm	\$739
YDH03CWS	Column, stainless steel, for attaching indicator - platform, for platform sizes: 500x400(FE), height 750 mm	\$835

Order no.	Mechanical Accessories	Price in USD
YDH12CWSUS	Stainless Steel Indicator Bracket for Benchtop Imperial size Combics 10x10, 12x12, and 18x18"; also, Midrics & Combics metric size platforms DC, ED and FE. Will also work with SIWAEDG platforms	\$143
YDH02CISUS	Bracket for Indicator; wall mounting, tiltable, stainless steel	\$120
YAS07CI	Panel (cabinet) mount kit, with gasket, for all Combics indicators	\$411

Order no.	Statistical Process Control Software	Price in USD
H5	Combics@SPC Software for Stand-alone Systems for Average Weight Control	\$558

Recommended Spare Parts

Order no.	Description	Price in USD
69CW0450	Front Keypad Panel Combics 1	\$359
69CW0451	Front Keypad Panel Combics 2	\$478
69CW0452	Front Keypad Panel Combics 3	\$829
69CW0064	Power Supply PCB	\$183
69CW0456	Digital PCB	\$861
YDI02C-WP03	ADC interface for analog Platform 2x 3.000e (30.000d)	\$356

MiNexx 3000 Bench Platforms- Painted



Innovative V-Shape design
 Analog Platforms with high configurability
 Base frame in galvanized steel
 Load plate in stainless steel



Platform Selection- Metric Sizes- 30,000 divisions- IP66/67

Order no.	Dimensions (in.)	Capacity		Readability		Cable Length (ft.)	Load Plate	Base Frame	Price in USD
		(lb.)	(kg)	(lb.)	(g)				
NP3AP-1CC-L	7.9" x 7.9" x 2.4"	3lb	1.5kg	0.0001lb	0.05g	10	Stainless Steel	Galvanized	\$935
NP3AP-1DC-L	12.6" x 9.5" x 2.4"	3lb	1.5kg	0.0001lb	0.05g	10	Stainless Steel	Galvanized	\$961
NP3AP-3CC-L	7.9" x 7.9" x 2.4"	6lb	3kg	0.0002lb	0.1g	10	Stainless Steel	Galvanized	\$961
NP3AP-3DC-L	12.6" x 9.5" x 2.4"	6lb	3kg	0.0002lb	0.1g	10	Stainless Steel	Galvanized	\$991
NP3AP-3DD-L	12.6" x 12.6" x 3.2"	6lb	3kg	0.0002lb	0.1g	10	Stainless Steel	Galvanized	\$1,075
NP3AP-6CC-L	7.9" x 7.9" x 2.4"	13lb	6kg	0.0004lb	0.2g	10	Stainless Steel	Galvanized	\$991
NP3AP-6DC-L	12.6" x 9.5" x 2.4"	13lb	6kg	0.0004lb	0.2g	10	Stainless Steel	Galvanized	\$873
NP3AP-6DD-L	12.6" x 12.6" x 3.2"	13lb	6kg	0.0004lb	0.2g	10	Stainless Steel	Galvanized	\$932
NP3AP-15DC-L	12.6" x 9.5" x 2.4"	33lb	15kg	0.001lb	0.5g	10	Stainless Steel	Galvanized	\$1,154
NP3AP-15DD-L	12.6" x 12.6" x 3.2"	33lb	15kg	0.001lb	0.5g	10	Stainless Steel	Galvanized	\$1,243
NP3AP-30DD-L	12.6" x 12.6" x 3.2"	66lb	30kg	0.002lb	1g	10	Stainless Steel	Galvanized	\$1,243
NP3AP-30ED-L	15.7" x 12.6" x 3.7"	66lb	30kg	0.002lb	1g	10	Stainless Steel	Galvanized	\$1,329
NP3AP-30FE-L	19.7" x 15.7" x 3.7"	66lb	30kg	0.002lb	1g	10	Stainless Steel	Galvanized	\$1,766
NP3AP-60DD-L	12.6" x 12.6" x 3.2"	132lb	60kg	0.004lb	2g	10	Stainless Steel	Galvanized	\$1,423
NP3AP-60ED-L	15.7" x 12.6" x 3.7"	132lb	60kg	0.004lb	2g	10	Stainless Steel	Galvanized	\$1,505
NP3AP-60FE-L	19.7" x 15.7" x 3.7"	132lb	60kg	0.004lb	2g	10	Stainless Steel	Galvanized	\$1,940
NP3AP-60GF-L	25.6" x 19.7" x 5.2"	132lb	60kg	0.004lb	2g	10	Stainless Steel	Galvanized	\$2,787
NP3AP-150FE-L	19.7" x 15.7" x 3.7"	330lb	150kg	0.01lb	5g	10	Stainless Steel	Galvanized	\$2,129
NP3AP-150GF-L	25.6" x 19.7" x 5.2"	330lb	150kg	0.01lb	5g	10	Stainless Steel	Galvanized	\$2,977
NP3AP-300GF-L	25.6" x 19.7" x 5.2"	660lb	300kg	0.02lb	10g	10	Stainless Steel	Galvanized	\$3,216

Platform Selection- Metric Sizes- 60,000 divisions (75,000 divisions for 33lb & 330lb Platforms)

***60,000d Models (NP3A-XXX-P) Must be ordered with CAIS... indicator + YDI02C-WP10 high performance A/D converter**

Order no.	Dimensions (in.)	Capacity		Readability		Cable Length (ft.)	Load Plate	Base Frame	Price in USD
		(lb.)	(kg)	(lb.)	(g)				
NP3AP-3CC-P	7.9" x 7.9" x 2.4"	6lb	3kg	0.0001lb	0.05g	10	Stainless Steel	Galvanized	\$1,100
NP3AP-3DC-P	12.6" x 9.5" x 2.4"	6lb	3kg	0.0001lb	0.05g	10	Stainless Steel	Galvanized	\$1,130
NP3AP-3DD-P	12.6" x 12.6" x 3.2"	6lb	3kg	0.0001lb	0.05g	10	Stainless Steel	Galvanized	\$1,214
NP3AP-6CC-P	7.9" x 7.9" x 2.4"	13lb	6kg	0.0002lb	0.1g	10	Stainless Steel	Galvanized	\$1,130
NP3AP-6DC-P	12.6" x 9.5" x 2.4"	13lb	6kg	0.0002lb	0.1g	10	Stainless Steel	Galvanized	\$1,012
NP3AP-6DD-P	12.6" x 12.6" x 3.2"	13lb	6kg	0.0002lb	0.1g	10	Stainless Steel	Galvanized	\$1,071
NP3AP-15DC-P	12.6" x 9.5" x 2.4"	33lb	15kg	0.0004lb	0.2g	10	Stainless Steel	Galvanized	\$1,293
NP3AP-15DD-P	12.6" x 12.6" x 3.2"	33lb	15kg	0.0004lb	0.2g	10	Stainless Steel	Galvanized	\$1,382
NP3AP-30DD-P	12.6" x 12.6" x 3.2"	66lb	30kg	0.001lb	0.5g	10	Stainless Steel	Galvanized	\$1,382
NP3AP-30ED-P	15.7" x 12.6" x 3.7"	66lb	30kg	0.001lb	0.5g	10	Stainless Steel	Galvanized	\$1,468
NP3AP-30FE-P	19.7" x 15.7" x 3.7"	66lb	30kg	0.001lb	0.5g	10	Stainless Steel	Galvanized	\$1,904
NP3AP-60DD-P	12.6" x 12.6" x 3.2"	132lb	60kg	0.002lb	1g	10	Stainless Steel	Galvanized	\$1,562
NP3AP-60ED-P	15.7" x 12.6" x 3.7"	132lb	60kg	0.002lb	1g	10	Stainless Steel	Galvanized	\$1,644
NP3AP-60FE-P	19.7" x 15.7" x 3.7"	132lb	60kg	0.002lb	1g	10	Stainless Steel	Galvanized	\$2,079
NP3AP-60GF-P	25.6" x 19.7" x 5.2"	132lb	60kg	0.002lb	1g	10	Stainless Steel	Galvanized	\$2,925
NP3AP-150FE-P	19.7" x 15.7" x 3.7"	330lb	150kg	0.004lb	2g	10	Stainless Steel	Galvanized	\$2,268
NP3AP-150GF-P	25.6" x 19.7" x 5.2"	330lb	150kg	0.004lb	2g	10	Stainless Steel	Galvanized	\$3,116
NP3AP-300GF-P	25.6" x 19.7" x 5.2"	660lb	300kg	0.01lb	5g	10	Stainless Steel	Galvanized	\$3,355

Options MiNexx 3000 Platform Painted- Options only available with purchase of NEW units- Not Field Retrofittable

K3	MiNexx 3000 Platform Test Report	\$311
K5	MiNexx 3000 Platform Factory Certificate	\$311
O1	MiNexx 3000 35mm Taller Platform Construction (only CC/DC Sizes N(Y)P3AP Models Only)	\$57

MiNexx 3000 Bench Platforms- Stainless Steel



Innovative V-Shape design
 Analog Platforms with high configurability
 Stainless steel AISI304/1.4301
 Different surface finish available
 IP 66/67, optional IP 68/69K



Platform Selection- Metric Sizes- 30,000 divisions

Order no.	Dimensions (in.)	Capacity		Readability		Cable Length Platform (ft.)	Load Plate	Base Frame	Price in USD
		(lb.)	(kg)	(lb.)	(g)				
NP3AS-1CC-L	7.9" x 7.9" x 3.0"	3lb	1.5kg	0.0001lb	0.05g	10	Stainless Steel	Stainless Steel	\$1,786
NP3AS-1DC-L	12.6" x 9.5" x 3.0"	3lb	1.5kg	0.0001lb	0.05g	10	Stainless Steel	Stainless Steel	\$1,980
NP3AS-3CC-L	7.9" x 7.9" x 3.0"	6lb	3kg	0.0002lb	0.1g	10	Stainless Steel	Stainless Steel	\$1,786
NP3AS-3DC-L	12.6" x 9.5" x 3.0"	6lb	3kg	0.0002lb	0.1g	10	Stainless Steel	Stainless Steel	\$1,980
NP3AS-3DD-L	12.6" x 12.6" x 3.8"	6lb	3kg	0.0002lb	0.1g	10	Stainless Steel	Stainless Steel	\$2,230
NP3AS-6CC-L	7.9" x 7.9" x 3.0"	13lb	6kg	0.0004lb	0.2g	10	Stainless Steel	Stainless Steel	\$1,786
NP3AS-6DC-L	12.6" x 9.5" x 3.0"	13lb	6kg	0.0004lb	0.2g	10	Stainless Steel	Stainless Steel	\$1,980
NP3AS-6DD-L	12.6" x 12.6" x 3.8"	13lb	6kg	0.0004lb	0.2g	10	Stainless Steel	Stainless Steel	\$2,230
NP3AS-15DC-L	12.6" x 9.5" x 3.0"	33lb	15kg	0.001lb	0.5g	10	Stainless Steel	Stainless Steel	\$2,039
NP3AS-15DD-L	12.6" x 12.6" x 3.8"	33lb	15kg	0.001lb	0.5g	10	Stainless Steel	Stainless Steel	\$2,295
NP3AS-30DD-L	12.6" x 12.6" x 3.8"	66lb	30kg	0.002lb	1g	10	Stainless Steel	Stainless Steel	\$2,295
NP3AS-30ED-L	15.7" x 12.6" x 3.8"	66lb	30kg	0.002lb	1g	10	Stainless Steel	Stainless Steel	\$2,553
NP3AS-30FE-L	19.7" x 15.7" x 3.85"	66lb	30kg	0.002lb	1g	10	Stainless Steel	Stainless Steel	\$3,205
NP3AS-60DD-L	12.6" x 12.6" x 3.8"	132lb	60kg	0.004lb	2g	10	Stainless Steel	Stainless Steel	\$2,295
NP3AS-60ED-L	15.7" x 12.6" x 3.8"	132lb	60kg	0.004lb	2g	10	Stainless Steel	Stainless Steel	\$3,063
NP3AS-60FE-L	19.7" x 15.7" x 3.85"	132lb	60kg	0.004lb	2g	10	Stainless Steel	Stainless Steel	\$3,205
NP3AS-60GF-L	25.6" x 19.7" x 5.1"	132lb	60kg	0.004lb	2g	10	Stainless Steel	Stainless Steel	\$5,583
NP3AS-150FE-L	19.7" x 15.7" x 3.85"	330lb	150kg	0.01lb	5g	10	Stainless Steel	Stainless Steel	\$4,008
NP3AS-150GF-L	25.6" x 19.7" x 5.1"	330lb	150kg	0.01lb	5g	10	Stainless Steel	Stainless Steel	\$6,149
NP3AS-300GF-L	25.6" x 19.7" x 5.1"	660lb	300kg	0.02lb	10g	10	Stainless Steel	Stainless Steel	\$6,349

Platform Selection- Metric Sizes- 60,000 divisions (75,000 divisions for 33lb & 330lb Platforms)

***60,000d Models (NP3AS-XXX-P-IP69) Must be ordered with CAIS... indicator + YDI02C-WP10 high performance A/D converter**
**** IP69K Option Required and already included in Price**

Order no. **	Dimensions (in.)	Capacity		Readability		Cable Length Platform (ft.)	Load Plate	Base Frame	Price in USD
		(lb.)	(kg)	(lb.)	(g)				
NP3AS-3CC-P-IP69	7.9" x 7.9" x 3.0"	6lb	3kg	0.0001lb	0.05g	10	Stainless Steel	Stainless Steel	\$2,228
NP3AS-3DC-P-IP69	12.6" x 9.5" x 3.0"	6lb	3kg	0.0001lb	0.05g	10	Stainless Steel	Stainless Steel	\$2,423
NP3AS-3DD-P-IP69	12.6" x 12.6" x 3.8"	6lb	3kg	0.0001lb	0.05g	10	Stainless Steel	Stainless Steel	\$2,672
NP3AS-6CC-P-IP69	7.9" x 7.9" x 3.0"	13lb	6kg	0.0002lb	0.1g	10	Stainless Steel	Stainless Steel	\$2,228
NP3AS-6DC-P-IP69	12.6" x 9.5" x 3.0"	13lb	6kg	0.0002lb	0.1g	10	Stainless Steel	Stainless Steel	\$2,423
NP3AS-6DD-P-IP69	12.6" x 12.6" x 3.8"	13lb	6kg	0.0002lb	0.1g	10	Stainless Steel	Stainless Steel	\$2,672
NP3AS-15DC-P-IP69	12.6" x 9.5" x 3.0"	33lb	15kg	0.0004lb	0.2g	10	Stainless Steel	Stainless Steel	\$2,482
NP3AS-15DD-P-IP69	12.6" x 12.6" x 3.8"	33lb	15kg	0.0004lb	0.2g	10	Stainless Steel	Stainless Steel	\$2,738
NP3AS-30DD-P-IP69	12.6" x 12.6" x 3.8"	66lb	30kg	0.001lb	0.5g	10	Stainless Steel	Stainless Steel	\$2,738
NP3AS-30ED-P-IP69	15.7" x 12.6" x 3.8"	66lb	30kg	0.001lb	0.5g	10	Stainless Steel	Stainless Steel	\$2,996
NP3AS-30FE-P-IP69	19.7" x 15.7" x 3.85"	66lb	30kg	0.001lb	0.5g	10	Stainless Steel	Stainless Steel	\$3,647
NP3AS-60DD-P-IP69	12.6" x 12.6" x 3.8"	132lb	60kg	0.002lb	1g	10	Stainless Steel	Stainless Steel	\$2,738
NP3AS-60ED-P-IP69	15.7" x 12.6" x 3.8"	132lb	60kg	0.002lb	1g	10	Stainless Steel	Stainless Steel	\$3,505
NP3AS-60FE-P-IP69	19.7" x 15.7" x 3.85"	132lb	60kg	0.002lb	1g	10	Stainless Steel	Stainless Steel	\$3,647
NP3AS-60GF-P-IP69	25.6" x 19.7" x 5.1"	132lb	60kg	0.002lb	1g	10	Stainless Steel	Stainless Steel	\$6,026
NP3AS-150FE-P-IP69	19.7" x 15.7" x 3.85"	330lb	150kg	0.004lb	2g	10	Stainless Steel	Stainless Steel	\$4,450
NP3AS-150GF-P-IP69	25.6" x 19.7" x 5.1"	330lb	150kg	0.004lb	2g	10	Stainless Steel	Stainless Steel	\$6,591
NP3AS-300GF-P-IP69	25.6" x 19.7" x 5.1"	660lb	300kg	0.01lb	5g	10	Stainless Steel	Stainless Steel	\$6,792

OPTIONS: MiNexx 3000 Stainless Steel Bench Platforms								
- Options only available with purchase of NEW units- Not Field Retrofittable								
Option Order Number		CC	DC	DD	ED	FE	GF	Price USD
		200 x 200	320 x 240	300 x 300	400 x 300	500 x 400	650 x 500	
Load plate finishing								
N5	Stainless steel 1.4404 AISI	•						\$471
	316 L Electropolished		•					\$530
				•				\$576
					•			\$624
						•		\$766
							•	\$1,018
Frame finishing								
N9	Frame in stainless steel	•						\$1,062
	1.4404 AISI 316 L Electropolished		•					\$1,190
				•				\$1,399
					•			\$1,630
						•		\$2,261
							•	\$2,566
Others								
IP69	IP69K Load Cell Upgrade	•	•	•	•	•	•	\$304
P1	Hygienic Upgrade (No exposed threading)	•	•	•	•	•	•	\$233
Certificates								
K2	Certificate surface roughness	•	•	•	•	•	•	\$311
K3	Test Report	•	•	•	•	•	•	\$311
K5	Factory Certificate	•	•	•	•	•	•	\$311
K6	NSF certificate (Only available with option P1)	•	•	•	•	•	•	\$311

ACCESSORIES: MiNexx 3000 Bench Platform



Stainless steel 1.4301 / AISI304

Order no.	Description	Price in USD
Roller Conveyor		
ARC01-SED	Roller Conveyor- Stainless Steel 400 x 300 Platform	\$2,405
ARC01-SFE	Roller Conveyor- Stainless Steel 500 x 400 Platform	\$2,557
ARC01-SGF	Roller Conveyor- Stainless Steel 650 x 500 Platform	\$3,174



Galvanized Steel or
Stainless steel 1.4301 / AISI304

Order no.	Description	Price in USD
Trestle		
ATP01-S	Trestle Stand- Stainless Steel for 400 x 300 Platforms; 619-703mm Height	\$1,841
ATP02-S	Trestle Stand- Stainless Steel for 500 x 400 Platforms; 619-703mm Height	\$1,841
ATP03-S	Trestle Stand- Stainless Steel for 650 x 500 Platforms; 619-703mm Height	\$2,211
ATP01-P	Trestle Stand- Galvanized for 400 x 300 Platforms; 619-703mm Height	\$1,475
ATP02-P	Trestle Stand- Galvanized for 500 x 400 Platforms; 619-703mm Height	\$1,475
ATP03-P	Trestle Stand- Galvanized for 650 x 500 Platforms; 619-703mm Height	\$1,841



Stainless steel 1.4301 / AISI304

Order no.	Description	Price in USD
Bench column		
ACB01-S	Bench Column, 330mm height, Stainless Steel for DC & DD Platforms	\$652
ACB02-S	Bench Column, 500mm height, Stainless Steel for ED, FE, & GF Platforms	\$738
ACB03-S	Bench Column, 750mm height, Stainless Steel for FE & GF Platforms	\$836

ACCESSORIES Continued: MiNexx 3000 Bench Platform



Stainless steel 1.4301 / AISI304

Order no.	Description	Price in USD
Cable cover		
ACB11-S	Cable cover for ACB01-S Column, Stainless Steel- Required for P1 Option	\$267
ACB22-S	Cable cover for ACB02-S Column, Stainless Steel- Required for P1 Option	\$297
ACB33-S	Cable cover for ACB03-S Column, Stainless Steel- Required for P1 Option	\$341



Stainless steel 1.4301 / AISI304

Order no.	Description	Price in USD
Adapter Plate		
ACM01-S	Adapter Plate for Attaching Indicator to any sized Column, Stainless Steel	\$19



Stainless steel 1.4301 / AISI304

Order no.	Description	Price in USD
Hanger		
AUF01	Under hook for hanging weighing applications (FE and smaller on Galvanized Platforms & ED and smaller of Stainless Steel Platforms)	\$29



Stainless steel 1.4301 / AISI304

Order no.	Description	Price in USD
Bench accessory		
AWT01-S	Set of Wheels for Trestle Stands	\$537

Painted Steel Combics Platforms

Platform Selection- Imperial Sizes

Order no.	Dimensions		Capacity		Readability		Cable Length Platform	Shipping Weight	Price in USD
	(in.)	(lb.)	(kg)	(lb.)	(g)	(ft.)	(lb.)		
CAPP1U-10CC-LU	10x 10	15	6	0.0005	0.2	10	14	\$889	
CAPP1U-20CC-LU	10x 10	30	15	0.001	0.5	10	14	\$890	
CAPP1U-50CC-LU	10x 10	60	30	0.002	1	10	14	\$887	
CAPP1U-50DD-LU	12 x 12	60	30	0.002	1	10	18	\$1,012	
CAPP1U-50EE-LU	18 x 18	60	30	0.002	1	10	64	\$1,451	
CAPP1U-100DD-LU	12 x 12	150	60	0.005	2	10	18	\$948	
CAPP1U-100EE-LU	18 x 18	150	60	0.005	2	10	64	\$1,463	
CAPP1U-100GG-LU	24 x 24	150	60	0.005	2	10	121	\$3,105	
CAPP1U-100HH-LU	30 x 30	150	60	0.005	2	10	187	\$3,952	
CAPP1U-200EE-LU	18 x 18	200	100	0.01	5	10	64	\$1,491	
CAPP1U-250GG-LU	24 x 24	300	150	0.01	5	10	121	\$3,105	
CAPP1U-250HH-LU	30 x 30	300	150	0.01	5	10	187	\$3,952	
CAPP1U-500GG-LU	24 x 24	600	300	0.02	10	10	121	\$3,105	
CAPP1U-500HH-LU	30 x 30	600	300	0.02	10	10	187	\$3,952	
CAPP1U-1000HH-LU	30 x 30	1500	600	0.05	20	10	187	\$3,952	

Platform Selection: 60,000d models- Metric Sizes

									Price in USD
	(in.)	(lb.)	(kg)	(lb.)	(g)	(ft.)			
CAAPP1-6DC-S	12.6 x 9.4	15	6	0.0002	0.1	10	18	\$1,121	
CAAPP1-15DC-S	12.6 x 9.4	30	15	0.0005	0.2	10	18	\$1,258	
CAAPP1-30ED-S	15.7 x 11.8	60	30	0.001	0.5	10	29	\$1,432	
CAAPP1-30FE-S	19.7 x 15.7	60	30	0.001	0.5	10	52	\$1,870	
CAAPP1-60ED-S	15.7 x 11.8	150	60	0.002	1	10	29	\$1,609	
CAAPP1-60FE-S	19.7 x 15.7	150	60	0.002	1.0	10	52	\$2,045	
CAAPP1-60GF-S	25.6 x 19.7	150	60	0.002	1	10	100	\$2,891	
CAAPP1-60IG-S	31.5 x 23.6	150	60	0.002	1.0	10	139	\$3,316	
CAAPP1-150FE-S	19.7 x 15.7	300	150	0.005	2	10	52	\$2,235	
CAAPP1-150GF-S	25.6 x 19.7	300	150	0.005	2.0	10	100	\$3,081	
CAAPP1-150IG-S	31.5 x 23.6	300	150	0.005	2	10	139	\$3,501	


*60,000d Models Must be ordered with CAIS... indicator + YDI02C-WP10 high performance A/D converter



Stainless Steel Combics Platforms- Imperial Sizes

Platform Selection

Order no.	Dimensions (in.)	Capacity		Readability		Cable Length Platform (ft.)	Shipping Weight (lb.)	Price in USD
		(lb.)	(kg)	(lb.)	(kg)			
CAPS1U-10CC-LU	10x 10	15	6	0.0005	0.0002	10	16	\$1,349
CAPS1U-20CC-LU	10x 10	30	15	0.001	0.0005	10	16	\$1,312
CAPS1U-50CC-LU	10x 10	60	30	0.002	0.001	10	16	\$1,349
CAPS1U-50DD-LU	12 x 12	60	30	0.002	0.001	10	24	\$1,461
CAPS1U-50EE-LU	18 x 18	60	30	0.002	0.001	10	62	\$1,976
CAPS1U-100DD-LU	12 x 12	150	60	0.005	0.002	10	24	\$1,509
CAPS1U-100EE-LU	18 x 18	150	60	0.005	0.002	10	62	\$1,948
CAPS4U-100GG-LU	24 x 24	150	60	0.005	0.002	10	121	\$6,508
CAPS4U-100HH-LU	30 x 30	150	60	0.005	0.002	10	187	\$7,329
CAPS1U-200EE-LU	18 x 18	200	100	0.01	0.005	10	62	\$1,976
CAPS4U-250GG-LU	24 x 24	300	150	0.01	0.005	10	121	\$6,735
CAPS4U-250HH-LU	30 x 30	300	150	0.01	0.005	10	187	\$7,329
CAPS4U-500GG-LU	24 x 24	600	300	0.02	0.01	10	121	\$6,735
CAPS4U-500HH-LU	30 x 30	600	300	0.02	0.01	10	187	\$7,329
CAPS4U-1000HH-LU	30 x 30	1500	600	0.05	0.02	10	187	\$7,329
CAPS4U-1000KK-LU	36 x 36	1500	600	0.05	0.02	20	250	\$8,418
CAPS4U-1000NN-LU	48 x 48	1500	600	0.05	0.02	20	390	\$10,526
CAPS4U-2500KK-LU	36 x 36	3000	1500	0.1	0.05	20	250	\$8,418
CAPS4U-2500NN-LU	48 x 48	3000	1500	0.1	0.05	20	390	\$10,526
CAPS4U-5000KK-LU	36 x 36	6000	3000	0.2	0.1	20	250	\$8,418
CAPS4U-5000NN-LU	48 x 48	6000	3000	0.2	0.1	20	390	\$10,526

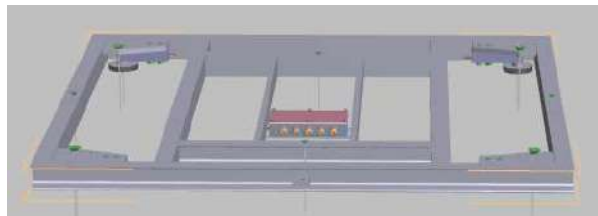

Options: Combics Stainless Steel Platforms *European Sizes Only- Metric Sizes


*All options listed require fabrication in Germany with European sizes. The top section indicates the European size platform (in mm) and price. Prices of the options are listed down the right-hand column. Add the two prices together to get the pricing of the platform with the requested option. A list of the corresponding capacities can be found at the bottom of the page.

See NEW MiNexx 3000 Platforms for smaller sizes
Metric Sizes

		GF	IG	II	LI	LL	NL	NN	RN	RR	WR	Price in USD		
Option		650 x 500 \$5,979	800 x 600 \$7,027	800 x 800 \$8,418	1000 x 800 \$9,162	1000 x 1000 \$9,390	1250 x 1000 \$9,988	1250 x 1250 \$10,504	1500 x 1250 \$11,129	1500 x 1500 \$12,021	2000 x 1500 \$14,046			
Load plate Finishing (only one choice possible)														
R2	Electropolished 316 Ti Stainless Steel											\$530		
													\$624	
													\$766	
		X											\$1,019	
			X										\$1,176	
				X	X	X								\$2,353
								X						\$2,585
									X	X				\$3,137
											X			\$3,429
										X		\$4,114		
Others														
T1	Pressure Lift System			X	X	X						\$1,377		
							X					\$1,471		
								X	X			\$1,576		
										X		\$1,701		
											X	\$1,882		
Certificates														
Z3	Test Report / Certificate	X	X	X	X	X	X	X	X	X	X	\$289		
Platform Frame Finishing (Not Pit Frame)														
S2	Platform Frame in Electropolished 316 Ti stainless steel											\$1,190		
													\$1,629	
													\$2,260	
		X											\$2,566	
			X										\$2,999	
				X	X	X							\$4,127	
								X					\$4,419	
									X	X			\$4,703	
											X		\$5,033	
										X	\$5,497			
Platform Capacities in kg :														
CAAPS4:														
IG-60/150/300/600				LL-150/300/600/1500/3000				RN-600/1500/3000						
II-150/300/600/1500/3000				NL-600/1500/3000				RR-600/1500/3000						
LI-300/600/1500/3000				NN-150/300/600/1500/3000				WR-600/1500/3000						
Example: CAAPS1-6DC or CAAPS4-300II														

Accessories: Combics Platforms

Order No.	Description	Price in USD
YAS99I	Connection kit - male and female connector for connecting an analog platform to an indicator	\$393
Order No.	Mechanical Accessories	
YDH12CWSUS	Stainless Steel Indicator Bracket for Benchtop Imperial size Combics 10x10, 12x12, and 18x18"; also, Midrics & Combics metric size platforms DC, ED and FE. Will also work with SIWAEDG platforms	\$143
YDH02CISUS	Bracket for Indicator; wall mounting, tiltable, stainless steel	\$120
YAS07CI	Panel (cabinet) mount kit, with gasket, for all Combics indicators	\$411
Order No.	Floor mounted	
YDH03CISUS	Column, Stainless Steel 43" floor mounted	\$444
YBP03CISUS	Base for installing floor-mounted column, stainless steel (4 struts)	\$302
YBH01CWS	Retainer for bar code scanner, for attachment to bench stand	\$250
YPP01CWS	Plate for attaching indicator and printer to bench stand	\$338
Order No.	Column, for attaching indicator-platform- Imperial Sizes	
YDH01CWSUS	Post mount assembly for Combics 10"x10" platforms, 13" High; Stainless Steel	\$326
YDH02CWSUS	Post mount assembly for Combics 12"x12" platforms, 19" High; Stainless Steel	\$337
YDH03CWSUS	Post mount assembly, for Combics 18"x18" platforms, 29"High; Stainless Steel	\$398
Order No.	Column, for attaching indicator-platform- Metric Sizes	
YDH01CWS	Column, stainless steel, for attaching indicator to platform for 320x240(DC) Platform, height 330 mm	\$653
YDH02CWS	Column, stainless steel, for attaching indicator to platform, for sizes 400x300 (ED) and 500x400(FE), height 500 mm	\$739
YDH03CWS	Column, stainless steel, for attaching indicator - platform, for platform sizes: 500x400(FE), height 750 mm	\$835
Order No.	Drive on Ramp, Stainless, Smooth - For Platform sizes:	
YAR-CWS-24US	Ramp, Smooth Stainless Steel For Platforms 24" x 24" (GG)	\$2,085
YAR-CWS-30US	Ramp, Smooth Stainless Steel For Platforms 30" x 30" (HH)	\$2,441
YAR-CWS-36US	Ramp, Smooth Stainless Steel For Platforms 36" x 36" (KK)	\$3,000
YAR-CWS-48US	Ramp, Smooth Stainless Steel For Platforms 48" x 48" (NN)	\$3,912
Order No.	Drive on Ramp, Stainless, Treadplate - For Platform sizes:	
YAR-CWST-24US	Ramp, Tread plate Stainless Steel For Platforms 24" x 24" (GG)	\$4,910
YAR-CWST-30US	Ramp, Tread plate Stainless Steel For Platforms 30" x 30" (HH)	\$3,204
YAR-CWST-36US-L	Ramp, Tread plate Stainless Steel For Platforms 36" x 36" (KK)	\$3,992
YAR-CWST-48US	Ramp, Tread plate Stainless Steel For Platforms 48" x 48" (NN)	\$5,238
Order No.	Pit Frame, Painted Steel - For platform sizes:	
YEG-HG-PUS	Pit Frame Mild Steel for Platforms 30" x 24" (HG)	\$1,101
YPF01KKP-MUS	Pit Frame, Mild Steel for Platforms 36" x 36" (KK)	\$1,206
Order No.	Pit Frame, Stainless Steel - For platform sizes:	
YEG-HG-SUS	Pit Frame Stainless Steel for Platforms 30" x 24" (HG)	\$2,585
YEG-HH-SUS	Pit Frame Stainless Steel for Platforms 30" x 30" (HH)	\$2,892
YPF01KKT-MUS	Pit Frame Stainless Steel for Platforms 36" x 36" (KK)	\$3,160
YPF01NNT-MUS	Pit Frame Stainless Steel for Platforms 48" x 48" (NN)	\$3,799
Order No.	Pit Frame, Stainless Steel, European Platforms for sizes:	
YEG01CWS	Frame for pit installation, stainless steel, for platform sizes: 800 x 600 mm	\$3,222
YEG08CWS	Frame for pit installation, stainless steel, for platform sizes: 800 x 800 mm	\$3,562
YEG07CWS	Frame for pit installation, stainless steel, for platform sizes: 1,000 x 800 mm	\$3,584
YEG02CWS	Frame for pit installation, stainless steel, for platform sizes: 1,000 x 1,000 mm	\$3,829
YEG03CWS	Frame for pit installation, stainless steel, for platform sizes: 1,250 x 1,000 mm	\$4,244
YEG09CWS	Frame for pit installation, stainless steel, for platform sizes: 1,250 x 1,250 mm	\$4,449
YEG04CWS	Frame for pit installation, stainless steel, for platform sizes: 1,500 x 1,250 mm	\$4,563
YEG05CWS	Frame for pit installation, stainless steel, for platform sizes: 1,500 x 1,500 mm	\$5,050
YEG06CWS	Frame for pit installation, stainless steel, for platform sizes: 2,000 x 1,500 mm	\$5,430

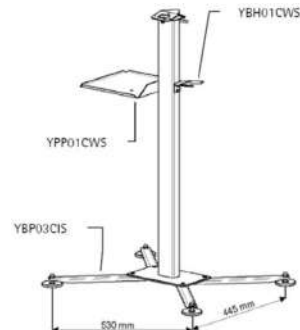

Spare Parts: Combics Platforms Imperial Sizes			
Recommended Spare Parts			
Order no.	Description	GWT #	Price in USD
00005001.1	15 kg Load cell for CAPP1U-10CC	011242	\$180
00005002.1	30 kg Load Cell for CAPP1U-20/50CC	011243	\$180
00005004.1	50 kg Load cell for CAPP1U-50DD	011244	\$173
00005005.1	100 kg Load Cell for CAPP1U-100DD	011245	\$176
00005006.1	50 kg Load Cell for CAPP1U-50EE	011246	\$269
00005007.1	100 kg Load cell for CAPP1U-100EE	011247	\$276
00005008.1	200 kg Load Cell for CAPP1U-200EE	011248	\$276
00005009.1	15 kg Load cell for CAPS1U-10CC	011294A	\$391
00005010.1	30 kg Load Cell for CAPS1U-20CC	011295A	\$391
00005011.1	50 kg Load Cell for CAPS1U-50[CC,DD,EE]	011296A	\$391
00005012.1	100 kg Load Cell for CAPS1U-100[DD,EE]	011297A	\$481
00005014.1	150 kg Load Cell for CAPP1U-100[GG,HH]	011252A	\$290
00005015.1	250 kg Load Cell for CAPP1U-250[GG,HH]	011253A	\$342
00005016.1	500 kg Load Cell for CAPP1U-500[GG,HH]	011290A	\$346
00005017.1	635 kg Load Cell for CAPP1U-1000HH	011468A	\$460
00005018.1	500 lb. Load Cell Kit for CAPS4U-1000[KK,NN]	011462	\$308
00005019.1	1250 lb. Load Cell Kit for CAPS4U-2500[KK,NN]	011468.1	\$360
00005020.1	2500 lb. Load Cell Kit for CAPS4U-5000[KK,NN]	011469.1	\$305
00005048.1	50 kg Load Cell KitCAPS4U-[100,200,250][GG,HH]	011272	\$439
00005049.1	100 kg Load Cell Kit for CAPS4U-500[GG,HH]	011273	\$444
00005050.1	200 kg Load Cell Kit for CAPS4U-1000HH	011274	\$289

Software | Communication Tools



Minebea Intec OPC-UA Server

Minebea Intec OPC-UA Server is a software for IT connection of scales. The server is developed according to the "OPC UA Companion Specification for Weighing Technology" (VDMA 40200:2020-06), which was defined in a working group of leading scale manufacturers under the leadership of VDMA. Release and management of this specification by the OPC Foundation.

- Compatible with the products: Combics, Signum, Midrics, IS platform.
- Other scales on request
- The scales are connected via serial RS232 or Ethernet TCP/IP interface
- The software uses the XBPL protocol of the scales
- The data of the "simple scale" are transmitted, this includes among other the weight values gross, net, tare and the scale functions set zero and set tare
- compatible with Windows 10 and Windows Server 2016, other systems on request

Equipment Supplied

- The setup is available for download on our website: <https://www.minebea-intec.com>
- The license codes are sent by mail. The software generates a code during installation, by transferring this code the license is generated.
- The software includes a 30 days demo version

Order no.	Description	Price in USD
62OPC-UA-01	OPC-UA Server for connection of 1 to 5 scales	\$661
62OPC-UA-06	OPC-UA Server for connection of 6 to 10 scales	\$1,323
62OPC-UA-11	OPC-UA Server for connection of more than 11 scales	\$1,984

Midrics Complete Bench Scales

MW1=Midrics 1 Indicator

MW2= Midrics 2 Indicator

Painted Steel									
	Order no.	Capacity		Readability		Dimensions		Cable Length	Price in USD
		kg	lb.	g	lb.	mm	in.		
MW1P1U-3DC-L	3	6	0.2	0.0005	320 x 240	12.5 x 9.5	2,5 m	\$1,653	
MW1P1U-6DC-L	6	15	0.5	0.001	320 x 240	12.5 x 9.5	2,5 m	\$1,699	
MW1P1U-15DC-L	15	30	1	0.002	320 x 240	12.5 x 9.5	2,5 m	\$1,665	
MW2P1U-3DC-L	3	6	0.2	0.0005	320 x 240	12.5 x 9.5	2,5 m	\$1,588	
MW2P1U-6DC-L	6	15	0.5	0.001	320 x 240	12.5 x 9.5	2,5 m	\$1,588	
MW2P1U-15DC-L	15	30	1	0.002	320 x 240	12.5 x 9.5	2,5 m	\$1,588	
MW1P1U-30ED-L	30	60	2	0.005	400 x 300	15.75 x 11.8	2,5 m	\$1,795	
MW1P1U-60ED-L	60	120	5	0.01	400 x 300	15.75 x 11.8	2,5 m	\$1,841	
MW2P1U-30ED-L	30	60	2	0.005	400 x 300	15.75 x 11.8	2,5 m	\$1,772	
MW2P1U-60ED-L	60	120	5	0.01	400 x 300	15.75 x 11.8	2,5 m	\$1,702	
MW1P1U-30FE-L	30	60	2	0.005	500 x 400	19.5 x 15.75	2,5 m	\$2,046	
MW1P1U-60FE-L	60	120	5	0.01	500 x 400	19.5 x 15.75	2,5 m	\$2,055	
MW1P1U-150FE-L	150	300	10	0.02	500 x 400	19.5 x 15.75	2,5 m	\$2,055	
MW2P1U-30FE-L	30	60	2	0.005	500 x 400	19.5 x 15.75	2,5 m	\$1,997	
MW2P1U-60FE-L	60	120	5	0.01	500 x 400	19.5 x 15.75	2,5 m	\$2,006	
MW2P1U-150FE-L	150	300	10	0.02	500 x 400	19.5 x 15.75	2,5 m	\$1,983	



- NOTES:
- Weighing Pan is 304 Stainless Steel
 - Scale Frame in galvanized steel
 - IP65



Stainless Steel									
	Order no.	Capacity		Readability		Dimensions		Cable Length	Price in USD
		kg	lb.	g	lb.	mm	in.		
MW1S1U-3DC-L	3	6	0.2	0.0005	320 x 240	12.5 x 9.5	2,5 m	\$2,429	
MW1S1U-6DC-L	6	15	0.5	0.001	320 x 240	12.5 x 9.5	2,5 m	\$2,429	
MW1S1U-15DC-L	15	30	1	0.002	320 x 240	12.5 x 9.5	2,5 m	\$2,409	
MW2S1U-3DC-L	3	6	0.2	0.0005	320 x 240	12.5 x 9.5	2,5 m	\$2,363	
MW2S1U-6DC-L	6	15	0.5	0.001	320 x 240	12.5 x 9.5	2,5 m	\$2,363	
MW2S1U-15DC-L	15	30	1	0.002	320 x 240	12.5 x 9.5	2,5 m	\$2,363	
MW1S1U-30ED-L	30	60	2	0.005	400 x 300	15.75 x 11.8	2,5 m	\$2,403	
MW1S1U-60ED-L	60	120	5	0.01	400 x 300	15.75 x 11.8	2,5 m	\$2,358	
MW2S1U-30ED-L	30	60	2	0.005	400 x 300	15.75 x 11.8	2,5 m	\$2,284	
MW2S1U-60ED-L	60	120	5	0.01	400 x 300	15.75 x 11.8	2,5 m	\$2,284	
MW1S1U-30FE-L	30	60	2	0.005	500 x 400	19.5 x 15.75	2,5 m	\$2,811	
MW1S1U-60FE-L	60	120	5	0.01	500 x 400	19.5 x 15.75	2,5 m	\$2,811	
MW1S1U-150FE-L	150	300	10	0.02	500 x 400	19.5 x 15.75	2,5 m	\$2,824	
MW2S1U-30FE-L	30	60	2	0.005	500 x 400	19.5 x 15.75	2,5 m	\$2,761	
MW2S1U-60FE-L	60	120	5	0.01	500 x 400	19.5 x 15.75	2,5 m	\$2,761	
MW2S1U-150FE-L	150	300	10	0.02	500 x 400	19.5 x 15.75	2,5 m	\$2,775	

- NOTES:
- Scale Frame and Weighing Pan made from 304 Stainless Steel
 - IP67

Midrics Complete Bench Scales

MW1 = Midrics 1 Indicator



Measurement Canada Class III

MW2 = Midrics 2 Indicator

Painted Steel							
Order no.	Capacity	Readability	Dimensions	Material load plate	Material frame	Cable	Price in USD
	kg	g	mm				
MW1P1U-3DC-LCA	3	1	320 x 240	St. steel	Galvanized	2,5 m	\$1,727
MW1P1U-6DC-LCA	6	2	320 x 240	St. steel	Galvanized	2,5 m	\$1,727
MW1P1U-15DC-LCA	15	5	320 x 240	St. steel	Galvanized	2,5 m	\$1,727
MW2P1U-3DC-LCA	3	1	320 x 240	St. steel	Galvanized	2,5 m	\$1,661
MW2P1U-6DC-LCA	6	2	320 x 240	St. steel	Galvanized	2,5 m	\$1,661
MW2P1U-15DC-LCA	15	5	320 x 240	St. steel	Galvanized	2,5 m	\$1,661
MW1P1U-30ED-LCA	30	10	400 x 300	St. steel	Galvanized	2,5 m	\$1,868
MW1P1U-60ED-LCA	60	20	400 x 300	St. steel	Galvanized	2,5 m	\$1,868
MW2P1U-30ED-LCA	30	10	400 x 300	St. steel	Galvanized	2,5 m	\$1,845
MW2P1U-60ED-LCA	60	20	400 x 300	St. steel	Galvanized	2,5 m	\$1,795
MW1P1U-30FE-LCA	30	10	500 x 400	St. steel	Galvanized	2,5 m	\$2,120
MW1P1U-60FE-LCA	60	20	500 x 400	St. steel	Galvanized	2,5 m	\$2,128
MW1P1U-150FE-LCA	150	50	500 x 400	St. steel	Galvanized	2,5 m	\$2,128
MW2P1U-30FE-LCA	30	10	500 x 400	St. steel	Galvanized	2,5 m	\$2,070
MW2P1U-60FE-LCA	60	20	500 x 400	St. steel	Galvanized	2,5 m	\$2,079
MW2P1U-150FE-LCA	150	50	500 x 400	St. steel	Galvanized	2,5 m	\$2,079



- NOTES:
- Weighing Pan is 304 Stainless Steel
 - Scale Frame in galvanized steel
 - IP65




Stainless Steel							
Order no.	Capacity	Readability	Dimensions	Material load plate	Material frame	Cable	Price in USD
	kg	g	mm				
MW1S1U-3DC-LCA	3	1	320 x 240	St. steel	St. steel	2,5 m	\$2,509
MW1S1U-6DC-LCA	6	2	320 x 240	St. steel	St. steel	2,5 m	\$2,509
MW1S1U-15DC-LCA	15	5	320 x 240	St. steel	St. steel	2,5 m	\$2,461
MW2S1U-3DC-LCA	3	1	320 x 240	St. steel	St. steel	2,5 m	\$2,444
MW2S1U-6DC-LCA	6	2	320 x 240	St. steel	St. steel	2,5 m	\$2,444
MW2S1U-15DC-LCA	15	5	320 x 240	St. steel	St. steel	2,5 m	\$2,434
MW1S1U-30ED-LCA	30	10	400 x 300	St. steel	St. steel	2,5 m	\$2,438
MW1S1U-60ED-LCA	60	20	400 x 300	St. steel	St. steel	2,5 m	\$2,438
MW2S1U-30ED-LCA	30	10	400 x 300	St. steel	St. steel	2,5 m	\$2,365
MW2S1U-60ED-LCA	60	20	400 x 300	St. steel	St. steel	2,5 m	\$2,365
MW1S1U-30FE-LCA	30	10	500 x 400	St. steel	St. steel	2,5 m	\$2,891
MW1S1U-60FE-LCA	60	20	500 x 400	St. steel	St. steel	2,5 m	\$2,891
MW1S1U-150FE-LCA	150	50	500 x 400	St. steel	St. steel	2,5 m	\$2,905
MW2S1U-30FE-LCA	30	10	500 x 400	St. steel	St. steel	2,5 m	\$2,841
MW2S1U-60FE-LCA	60	20	500 x 400	St. steel	St. steel	2,5 m	\$2,841
MW2S1U-150FE-LCA	150	50	500 x 400	St. steel	St. steel	2,5 m	\$2,856

Midrics Indicators





Measurement
Canada



Order no.		Price in USD
Midrics 1 Indicator(Table Top Version with U-Bracket and RS232)		
MIS1UR-V1	Midrics 1 Indicator (Table Top Version with U-Bracket and RS232), Display 20mm LCD, backlit, Material: stainless steel, ingress protection: IP65, Midrics Indicators are Class III NTEP & Canadian Measure approved	\$795
Midrics 2 Indicator (Table Top Version with U-Bracket and RS232)		
MIS2UR-V2	Midrics 2 Indicator (Table Top Version with U-Bracket and RS232), With selectable application programming, display 20mm LCD, backlit, numerical keyboard, applications: weighing, counting, checkweighing, sorting (3 or 5 classes), totalizing, net-total, animal weighing, weighing in percent, neutral measurement, material: stainless steel, ingress protection: IP65, Midrics Indicators are Class III NTEP & Canadian Measure approved	\$895
Midrics 1 Indicator (US Version, Rectangular Housing with Wall Bracket & Internal Battery Pack)		
MIS1U-L9	Midrics 1 Indicator (US Version, Rectangular Housing with Wall Bracket & Internal Battery Pack, Display 20mm LCD, backlit, Material: stainless steel, ingress protection: IP65 Does not come standard with RS232, Midrics Indicators are Class III NTEP & Canadian Measure approved	\$1,100
Midrics 2 Indicator (US Version, Rectangular Housing with Wall Bracket &Internal Battery Pack)		
MIS2U-L9	Midrics 2 Indicator (US Version, Rectangular Housing with Wall Bracket &Internal Battery Pack, With selectable application programming, display 20mm LCD, backlit, numerical keyboard, applications: weighing, counting, checkweighing, sorting (3 or 5 classes), totalizing, net-total, animal weighing, weighing in percent, neutral measurement, material: stainless steel, ingress protection: IP65; Does not come standard with RS232, Midrics Indicators are Class III NTEP & Canadian Measure approved	\$1,200

Midrics Indicators are Class III NTEP approved

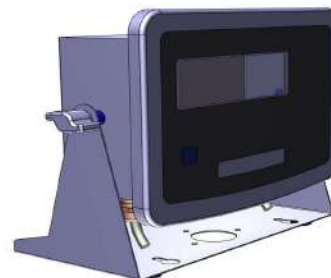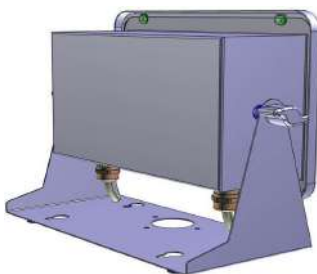

Accessories: Midrics Indicators

Order no.	Description	Price in USD
	Interfaces	
	COM 1: (Standard RS232 on all MIS1UR-V1 and MIS2UR-V2 units)	
YDO01M-232CLK	RS232 interface + Clock	\$283
	UniCOM:	
YDO01M-232CO	Interface RS232	\$468
YDO01M-485	RS485 interface	\$468
YDO01M-IO	Digital Input 5/ Output 5 opto isolated	\$1,142
YDA01M-20MA	Analog current output, 0-20 mA, 4-20 mA, 0-10V, 16-bit	\$647
YDO01M-EN	Ethernet TCP/IP (not Ethernet IP) and Modbus TCP interface (RJ45 connector internal)	\$1,087
	External data interface adapters	
YCC01-USBM2	Connecting cable from RS232 to USB-Connector, 2 m	\$277
	Printers	
YDP21-US	Needle high speed matrix printer up to 57 mm paper width with internal power supply 115V (US)	\$1,355
ZD421d	Strip or label printer, prints barcodes with direct thermal printer head up to 108 mm paper width with external power supply 115V (US)	\$3,527
	Others	
YDC01SW	Dust covers (2 units)	\$98
YAS04CIS	Cable gland (PG) for cables 4.5 up to 9 mm, IP67 protected, M16 x 1.5	\$75
YAS03MI	Kit for attaching the indicator to a switch cabinet	\$261
	Power Supply	
YAS02MI	24V industrial power supply module	\$283
	Cables	
YCC02-D09M6	Connection cable for printer YDP05, ZD421d/t, open cable ends to 9-pin D-Sub male connector, 6m	\$291
YCC02-D09F6	Connection cable for printer YDP21 or PC, open cable ends to 9-pin D-Sub female connector, 6m	\$291
YCC02-D25F6	Connecting cable for accessories - 25 pin D-SUB female, 6m	\$291
YCC02-R12F6	Connecting cable for accessories and IS platforms, - 12-pin round female connector, 3 m	\$291
YCC02-RELAIS02	Connecting cable to open ended cable, 6 m	\$291
YCC02-RJ45M7	Ethernet connecting cable with RJ45 male connector, 7 m	\$291
6906926	Connecting cable for analog output (4-20mA) for YDA01C-20MA, cable with open ends, e.g. 5x = 5 m	\$66
	Mechanical Accessories	
YDH12CWSUS	Stainless Steel Indicator Bracket for Benchtop Imperial size Combics 10x10, 12x12, and 18x18"; also, Midrics & Combics metric size platforms DC, ED and FE. Will also work with SIWAEDG platforms	\$143
YAS99I	Connection kit - male and female connector for connecting an analog platform to an indicator (disconnectable plug-in)	\$393
YDH02CISUS	Bracket for Indicator; wall mounting, tiltable, stainless steel	\$120
YDH03CISUS	Column, Stainless Steel 43" floor mounted	\$444
YBP03CISUS	Base for installing floor-mounted column, stainless steel (4 struts)	\$302
YBH01CWS	Retainer for bar code scanner, for attachment to bench stand	\$250
YPP01CWS	Plate for attaching indicator and printer to bench stand	\$338
	Column, stainless steel, for attaching indicator to platform	
YDH01CWS	Column, stainless steel, for attaching indicator to platform for 320x240(DC) Platform, height 330 mm	\$653
YDH02CWS	Column, stainless steel, for attaching indicator to platform, for sizes 400x300 (ED) and 500x400(FE), height 500 mm	\$739
YDH03CWS	Column, stainless steel, for attaching indicator - platform, for platform sizes: 500x400(FE), height 750 mm	\$835

Midrics Bench Scales

Painted Steel								
Order no.	Capacity		Readability		Dimensions		Cable Length	Price in USD
	kg	lb.	g	lb.	mm	in.		
MAPP1U-3DC-L	3	6	0.2	0.0005	320 x 240	12.5 x 9.5	2.5 m	\$694
MAPP1U-6DC-L	6	15	0.5	0.001	320 x 240	12.5 x 9.5	2.5 m	\$648
MAPP1U-15DC-L	15	30	1	0.002	320 x 240	12.5 x 9.5	2.5 m	\$648
MAPP1U-30ED-L	30	60	2	0.005	400 x 300	15.75 x 11.8	2.5 m	\$794
MAPP1U-30FE-L	30	60	2	0.005	500 x 400	19.5 x 15.75	2.5 m	\$1,070
MAPP1U-60ED-L	60	120	5	0.01	400 x 300	15.75 x 11.8	2.5 m	\$851
MAPP1U-60FE-L	60	120	5	0.01	500 x 400	19.5 x 15.75	2.5 m	\$1,078
MAPP1U-150FE-L	150	300	10	0.02	500 x 400	19.5 x 15.75	2.5 m	\$1,077

- NOTES:
- All Midrics platforms are Measurement Canada approved for 3,000 e
 - Weighing Pan is 304 Stainless Steel
 - Frame is galvanized steel
 - IP65

Stainless Steel								
Order no.	Capacity		Readability		Dimensions		Cable Length	Price in USD
	kg	lb.	g	lb.	mm	in.		
MAPS1U-3DC-L	3	6	0.2	0.0005	320 x 240	12.5 x 9.5	2.5 m	\$1,432
MAPS1U-6DC-L	6	15	0.5	0.001	320 x 240	12.5 x 9.5	2.5 m	\$1,432
MAPS1U-15DC-L	15	30	1	0.002	320 x 240	12.5 x 9.5	2.5 m	\$1,432
MAPS1U-30ED-L	30	60	2	0.005	400 x 300	15.75 x 11.8	2.5 m	\$1,356
MAPS1U-30FE-L	30	60	2	0.005	500 x 400	19.5 x 15.75	2.5 m	\$1,843
MAPS1U-60ED-L	60	120	5	0.01	400 x 300	15.75 x 11.8	2.5 m	\$1,355
MAPS1U-60FE-L	60	120	5	0.01	500 x 400	19.5 x 15.75	2.5 m	\$1,841
MAPS1U-150FE-L	150	300	10	0.02	500 x 400	19.5 x 15.75	2.5 m	\$1,857

- NOTES:
- All Midrics platforms are Measurement Canada approved for 3,000 e
 - Weighing Pan and Frame made completely of 304 Stainless Steel
 - IP67

MAPP4U Painted Floor Scales



Painted Steel

Order no.	Capacity lb.	Dimensions	Material	Shipping Weight (lb.)	Price in USD
MAPP4U-2500KK-N	2,500	36" x 36"	Painted Steel	235	\$2,517
MAPP4U-5000KK-N	5,000	36" x 36"	Painted Steel	235	\$2,517
MAPP4U-10000KK-N	10,000	36" x 36"	Painted Steel	235	\$2,517
MAPP4U-2500NN-N	2,500	48" x 48"	Painted Steel	391	\$2,613
MAPP4U-5000NN-N	5,000	48" x 48"	Painted Steel	391	\$2,613
MAPP4U-10000NN-N	10,000	48" x 48"	Painted Steel	391	\$2,716
MAPP4U-2500RR-N	2,500	60" x 60"	Painted Steel	548	\$2,921
MAPP4U-5000RR-N	5,000	60" x 60"	Painted Steel	548	\$3,183
MAPP4U-10000RR-N	10,000	60" x 60"	Painted Steel	548	\$3,183

- NOTES:
- All MAPP4U platforms are NTEP approved for 5,000d
 - All Platforms come with 15-foot home run cable
 - Items not in stock, usually carry a 1-week lead time

Accessories: Midrics Floor Scale

Order no.	Description	Price in USD
YEG3MAPPU	3' Pit frame for MAPP4U-KK platforms	\$737
YEG4MAPPU	4' Pit frame for MAPP4U-NN platforms	\$993
YEG5MAPPU	5' Pit frame for MAPP4U-RR platforms	\$1,224
YBG4MAPPU	4" bumper guard (one side)	\$466
YBG5MAPPU	5" bumper guard (one side)	\$559
YAR33MAPPU	3' x 3' Ramp for MAPP4U-KK platforms	\$710
YAR34MAPPU	3' x 4' Ramp for MAPP4U-KK platforms	\$809
YAR43MAPPU	4' x 3' Ramp for MAPP4U-NN platforms	\$888
YAR44MAPPU	4' x 4' Ramp for MAPP4U-NN platforms	\$947
YAR53MAPPU	5' x 3' Ramp for MAPP4U-RR platforms	\$993
YAR54MAPPU	5' x 4' Ramp for MAPP4U-RR platforms	\$1,375

Recommended Spare Parts

Order no.	Description	Price in USD
69BT7001	MAPP4U - Junction box with summing board	\$273
69BT7002	Foot for MAPP4U Floor Scales	\$136
69BT7003	1,000 lb. cell (MAPP4U-2500xx)	\$328
69BT7004	2,500 lb. cell (MAPP4U-5000xx)	\$328
69BT7005	4,000 lb. cell (MAPP4U-10000xx)	\$328
69BT7006	5,000 lb. cell (MAPP4U-10000xx)	\$328
69BT7007	Summing board for MAPP4U	\$179

Midrics Extend- Midrics Indicator paired with Combics Platforms

Mild Steel Combics Platform with MIS2-U

Order no.	Dimensions (in.)	Capacity		Readability		Cable Platform (ft.)	Shipping Weight (lb.)	Price in USD
		(lb.)	(kg)	(lb.)	(kg)			
MW2P1UE-10CC-I	10 x 10	15	6	0.0005	0.0002	10	18	\$1,791
MW2P1UE-50DD-I	12 x 12	60	30	0.002	0.001	10	22	\$1,907
MW2P1UE-100EE-I	18 x 18	150	60	0.005	0.002	10	63	\$2,490
MW2P1URE-250GG-I*	24 x 24	300	150	0.01	0.005	10	118	\$4,513

Stainless Steel Combics Platform with MIS2-U

Order no.	Dimensions (in.)	Capacity		Readability		Cable Platform (ft.)	Shipping Weight (lb.)	Price in USD
		(lb.)	(kg)	(lb.)	(kg)			
MW2S1UE-10CC-I	10 x 10	15	6	0.0005	0.0002	10	18	\$2,533
MW2S1UE-50DD-I	12 x 12	60	30	0.002	0.001	10	22	\$2,422
MW2S1UE-100EE-I	18 x 18	150	60	0.005	0.002	10	63	\$2,900
MW2S4URE-250GG-I*	24 x 24	300	150	0.01	0.005	10	118	\$7,401

* Comes with MIS2UR

Accessories: Midrics Extend

Order no.	Description	Price in USD
YDH03CISUS	Column, Stainless Steel 43" floor mounted	\$444
YBP03CISUS	Base for installing floor-mounted column, stainless steel (4 struts)	\$302
YPP01CWS	Plate for attaching indicator and printer to bench stand	\$338
YDH01CWSUS	Post mount assembly for Combics 10"x10" platforms, 13" High; Stainless Steel	\$326
YDH02CWSUS	Post mount assembly for Combics 12"x12" platforms, 19" High; Stainless Steel	\$337
YDH03CWSUS	Post mount assembly, for Combics 18"x18" platforms, 29"High; Stainless Steel	\$398
YDH12CWSUS	Stainless Steel Indicator Bracket for Benchtop Imperial size Combics 10x10, 12x12, and 18x18"; also, Midrics & Combics metric size platforms DC, ED and FE. Will also work with SIWAEDG platforms	\$143
YDH02CISUS	Bracket for Indicator; wall mounting, tiltable, stainless steel	\$120

Signum Supreme, Painted (SIWSDCP) -- Monolithic Load Cells with 60,000 - 350,000d Readability



- Frame painted, load plate AISI 304 stainless steel
- Dimension load plate: 13.8 inch x 9.4 inc (350 x 240 mm)
- Built in internal calibration weight on Some Models
- Overload protection 660lb. (300 kg)
- IP65 Ingress Protection

Order no.	Signum Supreme, Painted (SIWSDCP) Application Level 1- Basic Weighing	Price in USD
SIWSDCP-V41	Signum1® Supreme Complete Scale with HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface (25 Pin D-Sub Female) with SS load plate & Painted platform of size 13.8 inch x 9.5 inch (350 x 240 mm) Capacity 13.2 lb. x 0.0002lb (6kg x 0.1g) Readability; IP65 Ingress Protection and Built In Calibration Weight. (Old version SIWSDCP-1-6-S-IP65-E7-A11-IP65)	\$4,739
SIWSDCP-V68	Signum1® Supreme Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface (14 Pin Round Socket) with SS load plate & Painted platform size 13.7-inch x 9.4-inch (350 x 240 mm) Capacity 35 lb. x 0.0002lb (16kg x 0.1g) Readability; IP65 Ingress Protection; Built in Calibration Weight; Safe for ATEX Zone 2 and 22 (Old version SIWSDCP-1-16-H-IP65-E7-A11-Y2)	\$6,071
SIWSDCP-V18	Signum1® Supreme Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 35 lb. x 0.00022 lb. (16kg x 0.1g) Readability; Ingress Protection IP65	\$6,519
SIWSDCP-V70	Signum1® Supreme Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface (14 Pin Round Socket) with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 77 lb. x 0.0002 lb. (35kg x 0.1g) Readability; IP65 Ingress Protection; Built in Weight Calibration; Suitable for ATEX Zone 2 and 22 (Old Version SIWSDCP-1-35-H-IP65-E7-A11-Y2)	\$6,662
SIWSDCP-V19	Signum1® Supreme Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 77 lb. x 0.00022 lb. (35kg x 0.1g) Readability; Ingress Protection IP65	\$7,110



Order no.	Application Level 3- Basic Weighing, Counting, Percentage Weighing, Average (Animal) Weighing, Checkweighing, Classification, and Totalizing	Price in USD
SIWSDCP-V78	Signum3® Supreme Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232 w clock-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 13 lb. x 0.00022 lb. (6kg x 0.1g) Readability; IP65 Ingress Protection; Built in Calibration Weight; suitable for ATEX Zone 2 and 22 (Old Version SIWSDCP-3-6-S-IP65-A31-E7-Y2)	\$5,582
SIWSDCP-V74	Signum3® Supreme Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232 w clock-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 35 lb. x 0.00022 lb. (16kg x 0.1g) Readability; IP65 Ingress Protection; Built in Calibration Weight; suitable for ATEX Zone 2 and 22 (Old Version SIWSDCP-3-16-H-IP65-A31-E7-Y2)	\$6,914
SIWSDCP-V76	Signum3® Supreme Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232 w clock-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 77 lb. x 0.00022 lb. (16kg x 0.1g) Readability; IP65 Ingress Protection; Built in Calibration Weight; suitable for ATEX Zone 2 and 22 (Old Version SIWSDCP-3-35-H-IP65-A31-E7-Y2)	\$7,505

Signum Advanced, Painted High Resolution (SIWABBP) -- Strain Guage Load Cell 80,000 - 150,000d Readability



- Signum Advanced version with resolution from 80,000 - 150,000 d
- Frame painted, load plate AISI 304 stainless steel
- Dimension load plate: 7.1 inch x 7.1 inch (182 x 182 mm)
- Strain-gauge weighing system
- Overload protection: 66lbs (30kg)
- IP43 Ingress Protection

Order no.	Application Level 1- Basic Weighing	Price in USD
SIWABBP-V20	Signum@1 Advanced Complete Scale; HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-interface (25 Pin D-Sub Female) with painted frame and SS loadplate of size 7.1"x 7.1"; Capacity 3.3 lb. x 0.000022 lb. (1.5 kg x 0.01g) Readability; IP43 Ingress Rating (Old version SIWABBP1-1-H-A11)	\$3,476
SIWABBP-V21	Signum@1 Advanced Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-interface (25 Pin D-Sub Female) with painted frame and SS loadplate of size 7.1"x 7.1" Capacity 17 lb. x 0.00022 lb. (8kg x 0.1g) Readability; IP43 Ingress Rating (Old version SIWABBP1-8-H-A11)	\$2,996



Order no.	Application Level 3- Basic Weighing, Counting, Percentage Weighing, Average (Animal) Weighing, Checkweighing, Classification, and Totalizing	Price in USD
SIWABBP-V22	Signum@3 Advanced Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, weighing, dynamic weighing, counting, sum, checking, product data memory, identifiers (4x40 characters), RS232-interface with Clock (25 Pin D-Sub Female) with painted frame and SS loadplate of size 7.1" x7.1"; Capacity 3.3 lb. x 0.000022 lb. (1.5 kg x 0.01g) Readability; IP43 Ingress Protection (Old version SIWABBP3-1-H-A31)	\$4,315
SIWABBP-V23	Signum@3 Advanced, HMI with 28-buttons keyboard, 14-segments display plus application symbols, weighing, dynamic weighing, counting, sum, checking, product data memory, identifiers (4x40 characters), RS232-interface with Clock (25 Pin D-Sub Female) with painted frame and SS loadplate of size 7.1"x7.1"(180 x 180 mm); Capacity 17 lbs. x 0.00022lbs (8 kg x 0,1g) Readability; IP43 Ingress Protection (Old version SIWABBP3-8-H)	\$3,834

Signum Advanced, Painted (SIWADCP) -- Strain Guage Load Cell 65,000 - 80,000d Readability

- Signum Advanced version with resolution from 60,000 - 80,000 d
- Frame painted, load plate AISI 304 stainless steel
- Dimension load plate: 13.75 inch x 9.5" (350 x 240 mm)
- Strain-gauge weighing system
- Overload protection 660lbs (300 kg)
- IP43 and Optional IP65 Ingress Protection



Order no.	Application Level 1- Basic Weighing	Price in USD
SIWADCP-V40	Signum1® Advanced Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (13.8 inch x 9.4 inch (350 x 240 mm)) Capacity 15 lb. x 0.0002 lb. (7kg x 0.1g) Readability; IP43 Ingress Protection	\$2,461
SIWADCP-V41	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 35 lb. x 0.00044 lb. (16 kg x 0.2 g) Readability ; Ingress Rating IP43	\$2,476
SIWADCP-V42	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 77 lb. x 0.0011 lb. (35 kg x 0.5 g) Readability ; Ingress Rating IP43	\$2,505
SIWADCP-V43	Signum1® Regular, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 143 lb. x 0.0022 lb. (65 kg x 1 g) Readability ; Ingress Rating IP43	\$2,528



Order no.	Application Level 2- Basic Weighing, Counting, Percentage Weighing, Average (Animal) Weighing, Checkweighing, Classification, and Totalizing	Price in USD
SIWADCP-2-7-S	Signum2® Advanced Complete Scale, HMI with 14-buttons keyboard, 14-segments display plus application symbols, RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 15 lb. x 0.0002 lb. (7kg x 0.1g) Readability; IP43 Ingress Protection	\$2,734
SIWADCP-2-16-S	Signum2® Advanced Complete Scale, HMI with 14-buttons keyboard, 14-segments display plus application symbols, RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 35lb. X 0.00044 lb. (16kg x 0.2g) Readability; Ingress Protection IP43	\$2,749
SIWADCP-2-35-S	Signum2® Advanced Complete Scale, HMI with 14-buttons keyboard, 14-segments display plus application symbols, RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 77 lb. x 0.0011 lb. (35kg x 0.5g) Readability; Ingress Protection IP43	\$2,778
SIWADCP-2-65-S	Signum2® Advanced Complete Scale, HMI with 14-buttons keyboard, 14-segments display plus application symbols, RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 65kg x 1g Readability	\$2,801

OPTIONS: Signum Advanced, Painted (SIWADCP)

Order no.	Description	Price in USD
-IP65	IP protection IP65 (hose-proof and dust-tight)	\$449

Signum Advanced, Painted (SIWADCP) -- Continued

- Signum Advanced version with resolution from 60,000 - 80,000 d
- Frame painted, load plate AISI 304 stainless steel
- Dimension load plate: 350 x 240 mm
- Strain-gauge weighing system
- Overload protection 300 kg
- IP43



Order no.	Application Level 3- Basic Weighing, Counting, Percentage Weighing, Average (Animal) Weighing, Checkweighing, Classification, and Totalizing	Price in USD
SIWADCP-3-7-S	Signum3® Advanced Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 15 lb. x 0.0002 lb. (7kg x 0.1g) Readability; IP43 Ingress Protection	\$3,266
SIWADCP-V4	Signum3® Advanced Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 15.4 lb. x 0.00022 lb (7kg x 0.1g) Readability	\$3,715
SIWADCP-3-16-S	Signum3® Advanced Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 35lb. X 0.00044 lb. (16kg x 0.2g) Readability; Ingress Protection IP43	\$3,281
SIWADCP-3-35-S	Signum3® Advanced Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 77 lb. x 0.0011 lb. (35kg x 0.5g) Readability; Ingress Protection IP43	\$3,315
SIWADCP-V5	Signum3® Advanced Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 77 lb. x 0.001 lb. (35kg x 0.5g) Readability	\$3,763
SIWADCP-3-65-S	Signum3® Advanced Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 143 lb. x 0.0022 lb. (65kg x 1g) Readability; Ingress Protection IP43	\$3,333
SIWADCP-V6	Signum3® Advanced Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 143 lb. x 0.0022 lb. (65kg x 1.0g) Readability	\$3,782

OPTIONS: Signum Advanced, Painted (SIWADCP) -- Continued

Order no.	Description	Price in USD
-IP65	IP protection IP65 (hose-proof and dust-tight)	\$449

Signum Advanced Extend (SIWAEDG) -- Strain Guage Weighing Systems 60,000 - 80,000d Readability

- Signum Advanced version with resolution from 60,000 - 80,000 d
- Frame zincned, load plate AISI 304 stainless steel
- Dimension load plate: 15.75 inch x 11.8 inch (400 x 300 mm)
- Strain-gauge weighing system
- IP65
- Additional Options are not available for SIWAEDG



Order no.	Application Level 3- Basic Weighing, Counting, Percentage Weighing, Average (Animal) Weighing, Checkweighing, Classification, and Totalizing	Price in USD
SIWAEDG-3-16-S	Signum3® Advanced Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Zincned frame IP 65 platform size 15.75 inch x 11.8 inch (400 x 300 mm) Capacity 35 lb. x 0.00044 lb. (16kg x 0.2g)	\$3,680
SIWAEDG-3-35-S	Signum3® Advanced Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Zincned frame IP 65 platform of size 15.75 inch x 11.8 inch (400 x 300 mm) Capacity 77 lb. x 0.0011 lb. (35kg x 0.5g) Readability	\$3,680
SIWAEDG-3-65-S	Signum3® Advanced Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Zincned frame IP 65 platform of size 15.75 inch x 11.8 inch (400 x 300 mm) Capacity 143 lb. x 0.0022 lb. (65kg x 1g) Readability	\$3,868

Signum Regular, Painted (SIWRDCP) -- Straining Gauge Load Cell 6,000 - 30,000d Readability

- Signum Regular version with resolution from 6,000 - 35,000 d
- Frame painted, load plate AISI 304 stainless steel
- Dimension load plate: 13.8 inch x 9.5 inch (350 x 240 mm)
- Strain-gauge weighing system
- Overload protection 666 lbs. (300 kg)
- IP43 and Optional IP65



Order no.	Application Level 1- Basic Weighing- IP 43 Ingress Protection	Price in USD
SIWRDCP-V40	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 6.6 lb. x 0.00022 (3 kg x 0.1g) Readability; Ingress Rating IP43	\$1,700
SIWRDCP-V41	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240) mm Capacity 13.2 lb. x 0.00044 lb. (6kg x 0.2g) Readability; Ingress Rating IP43	\$1,724
SIWRDCP-1-6-R	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 6 kg x 1 g Readability	\$1,650
SIWRDCP-V42	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240) Capacity 33 lb. x 0.001 lb.(15kg x 0.5g) Readability; Ingress Rating IP43	\$1,743
SIWRDCP-1-15-R	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 15 kg x 2g Readability	\$1,669
SIWRDCP-V43	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface with SS load plate & Painted platform of size 13.8 inch x 9.4 inch (350 x 240) Capacity 143 lb. x 0.0022 lb. (65kg x 1g) Readability; Ingress Rating IP43	\$1,767
SIWRDCP-1-35-R	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 15 kg x 5 g Readability	\$1,693
SIWRDCP-1-60-I	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 60 kg x 2 g Readability	\$1,788
SIWRDCP-1-60-R	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 60 kg x 10 g Readability	\$1,714

Order no.	Application Level 1- Basic Weighing- IP 65 Ingress Protection	Price in USD
SIWRDCP-V6	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 6.6 lb. x 0.00022 lb. (3 kg x 0.1 g) Readability; Ingress Rating IP65	\$2,149
SIWRDCP-V7	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 13 lb. x 0.00044 lb. (6 kg x 0.2 g) Readability; Ingress Rating IP65	\$2,172
SIWRDCP-V8	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 33 lb. x 0.0011 lb. (15 kg x 0.5 g) Readability; Ingress Rating IP65	\$2,192
SIWRDCP-V9	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 77lb. x 0.0022 lb. (35 kg x 1 g) Readability; Ingress Rating IP65	\$2,215
SIWRDCP-V10	Signum1® Regular Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 132 lb. x 0.0044 lb.(60 kg x 2 g) Readability; Ingress Rating IP65	\$2,236

OPTIONS: Signum Regular, Painted (SIWRDCP)		
Order no.	Description	Price in USD
-IP65	IP65 Upgrade	\$449

Signum Regular, Painted (SIWRDCP)- Continued

- Signum Regular version with resolution from 6,000 - 35,000 d
- Frame painted, load plate AISI 304 stainless steel
- Dimension load plate: 13.8 inch x 9.5 inch (350 x 240 mm)
- Strain-gauge weighing system
- Overload protection 666 lbs. (300 kg)
- IP43 and Optional IP65



Order no.	Application Level 2- Basic Weighing, Counting, Percentage Weighing, Average (Animal) Weighing, Checkweighing, Classification, and Totalizing	Price in USD
SIWRDCP-2-3-I	Signum2® Regular Complete Scale, HMI with 14-buttons keyboard, 14-segments display plus application symbols, RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 3 kg x 0.1 g Readability	\$1,976
SIWRDCP-2-6-I	Signum2® Regular Complete Scale, HMI with 14-buttons keyboard, 14-segments display plus application symbols, RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 6 kg x 0.2 g Readability	\$1,999
SIWRDCP-2-6-R	Signum2® Regular Complete Scale, HMI with 14-buttons keyboard, 14-segments display plus application symbols, RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 6 kg x 1 g Readability	\$1,926
SIWRDCP-2-15-I	Signum2® Regular Complete Scale, HMI with 14-buttons keyboard, 14-segments display plus application symbols, RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 15 kg x 0.5 g Readability	\$2,019
SIWRDCP-2-15-R	Signum2® Regular Complete Scale, HMI with 14-buttons keyboard, 14-segments display plus application symbols, RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 15 kg x 2 g Readability	\$1,945
SIWRDCP-2-35-I	Signum2® Regular Complete Scale, HMI with 14-buttons keyboard, 14-segments display plus application symbols, RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 35 kg x 1 g Readability	\$2,043
SIWRDCP-2-35-R	Signum2® Regular Complete Scale, HMI with 14-buttons keyboard, 14-segments display plus application symbols, RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 35 kg x 5 g Readability	\$1,969
SIWRDCP-2-60-I	Signum2® Regular Complete Scale, HMI with 14-buttons keyboard, 14-segments display plus application symbols, RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 60 kg x 2 g Readability	\$2,064
SIWRDCP-2-60-R	Signum2® Regular Complete Scale, HMI with 14-buttons keyboard, 14-segments display plus application symbols, RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 60 kg x 10 g Readability	\$1,990

OPTIONS: Signum Regular, Painted (SIWRDCP)

Order no.	Description	Price in USD
-IP65	IP65 Upgrade	\$449

Signum Regular, Painted (SIWRDCP) -- Continued

- Signum Regular version with resolution from 6,000 - 35,000 d
- Frame painted, load plate AISI 304 stainless steel
- Dimension load plate: 13.8 inch x 9.5 inhc (350 x 240 mm)
- Strain-gauge weighing system
- Overload protection 666 lbs. (300 kg)
- IP43 and Optional IP65



Order no.	Application Level 3- Basic Weighing, Counting, Percentage Weighing, Average (Animal) Weighing, Checkweighing, Classification, and Totalizing; IP43 Ingress Protection	Price in USD
SIWRDCP-3-3-I	Signum3® Regular Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 3 kg x 0.1 g Readability	\$2,508
SIWRDCP-3-6-I	Signum3® Regular Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 6 kg x 0.2 g Readability	\$2,532
SIWRDCP-3-6-R	Signum3® Regular Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 6 kg x 1 g Readability	\$2,458
SIWRDCP-3-15-I	Signum3® Regular Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 15 kg x 0.5 g Readability	\$2,551
SIWRDCP-3-15-R	Signum3® Regular Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 15 kg x 2 g Readability	\$2,477
SIWRDCP-3-35-I	Signum3® Regular Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 35 kg x 1 g Readability	\$2,575
SIWRDCP-3-35-R	Signum3® Regular Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 35 kg x 5 g Readability	\$2,501
SIWRDCP-3-60-I	Signum3® Regular Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 60 kg x 2 g Readability	\$2,596
SIWRDCP-3-60-R	Signum3® Regular Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface with SS load plate & Painted platform of size 350 x 240 mm Capacity 60 kg x 10 g Readability	\$2,522

Order no.	Application Level 3- Basic Weighing, Counting, Percentage Weighing, Average (Animal) Weighing, Checkweighing, Classification, and Totalizing; IP65 Ingress Protection	Price in USD
SIWRDCP-V20	Signum3® Regular Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 13 lb. x 0.00044 lb. (6 kg x 0.2 g) Readability	\$2,980
SIWRDCP-V21	Signum3® Regular, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 33 lb. x 0.001 lb. (15 kg x 0.5 g) Readability	\$3,000
SIWRDCP-V22	Signum3® Regular, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 77 lb. x 0.0022 lb. (35 kg x 1 g) Readability	\$3,024
SIWRDCP-V23	Signum3® Regular, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 13.8 inch x 9.4 inch (350 x 240 mm) Capacity 132 lb. x 0.0044 lb. (60 kg x 2 g) Readability	\$3,044

Order no.	Description	Price in USD
-IP65	IP protection IP65 (hose-proof and dust-tight)	\$449

Signum Supreme High Resolution, Painted (SIWSBBP) -- Monolithic Load Cells 310,000- 620,000d Readability



- Signum Supreme version with resolution from 310,000 - 620,000 d
- Frame painted, load plate AISI 304 stainless steel
- Dimension load plate 1.3lb. (0.6 kg) version: Ø 4.5 inch (115 mm)
- Dimension load plate: for larger capacities 7.1 inch x 7.1 inch (182 x 182 mm)
- Some Models have internal calibration weight
- Monolithic weighing system
- Overload protection: 66 lbs. (30kg) (except 1.3 lb. & 6.8 lb. Version)
- IP43 and Optional IP65 with 3.1kg and 6.1kg units

Order no.	Application Level 1- Basic Weighing IP43 Ingress Protection	Price in USD
SIWSBBP-V24	Signum1@ Supreme Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface(25 Pin D-Sub Female Socket) with SS load plate & Painted platform size Ø 4.5 inch (115mm); Capacity 1.3 lb. x 0.000002 lb. (0.62kg x 0.001g) Readability; IP43 Ingress Rating; Internal Weight Calibration (Old Version SIWSBBP-1-06-H-A11-E7)	\$ 6,957
SIWSBBP-V59	Signum1@ Supreme Complete Scale, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface (25 Pin D-Sub Female Socket) with SS load plate & Painted platform size 7.1 "x 7.1" (182 x 182mm) Capacity 6.8 lb. x 0.00002 lb. (3.1kg x 0.01g) Readability; IP65 Ingress Protection; Built in Calibration Weight; suitable for ATEX Zone 2 and 22 (old Version SIWSBBP1-3-H-A11-IP65-E7-Y2)	\$ 5,053

Order no.	Application Level 1- Basic Weighing IP65 Ingress Protection	Price in USD
SIWSBBP-V16	Signum1@ Supreme, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 180 x 180 mm Capacity 6.8 lb. x 0.000022 lb. (3.1kg x 0.01g) Readability; Ingress Protection IP65	\$ 5,502
SIWSBBP-V17	Signum1@ Supreme, HMI with 6-buttons keyboard, 14-segments display, weighing, RS232-Interface, IP65 Protection, with Painted platform & SS load Pan size of 180 x 180 mm Capacity 13.44 lb. x 0.000022 lb. (6.1 x 0.01g) Readability; Ingress Protection IP65	\$ 6,642



Order no.	Application Level 3- Basic Weighing, Counting, Percentage Weighing, Average (Animal) Weighing, Checkweighing, Classification, and Totalizing with IP43 Ingress Protection	Price in USD
SIWSBBP-V31	Signum3@ Supreme Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232- with Clock Interface (25 Pin D-Sub Female Socket) with SS load plate & Painted platform size Ø 4.5 inch (115mm) Capacity 1.3 lb. x 0.000002 lb. (0.62kg x 0.001g) Readability; IP43 Ingress Protection; Built In Calibration Weight (Old Version SIWSBBP-3-06-H-A31-E7)	\$ 7,800
Order no.	Application Level 3- Basic Weighing, Counting, Percentage Weighing, Average (Animal) Weighing, Checkweighing, Classification, and Totalizing with IP65 Ingress Protection	Price in USD
SIWSBBP-V64	Signum3@ Supreme Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-with Clock Interface (25 Pin D-Sub Female Socket) with SS load plate & Painted platform size 7.1 "x 7.1" (182 x 182mm) Capacity 6.8 lb. x 0.00002 lb. (3.1kg x 0.01g) Readability; IP65 Ingress Protection; Built In Calibration Weight; suitable for ATEX Zone 2 and 22 (Old Version SIWSBBP-3-3-H-IP65-A31-E7-Y2)	\$ 5,895
SIWSBBP-V66	Signum3@ Supreme Complete Scale, HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232-with Clock Interface (25 Pin D-Sub Female Socket) with SS load plate & Painted platform size 7.1 "x 7.1" (182 x 182mm) Capacity 13.5 lb. x 0.00002 lb. (6.1 x 0.01g) Readability; IP65 Ingress Protection; suitable for ATEX Zone 2 and 22 (Old Version SIWSBBP-3-6-H-A31-IP65-Y2)	\$ 7,037

Options, for Signum SIWADCP-... and SIWRDCP-.... ONLY (13.8 inch x 9.4 inch Platforms ONLY)					
* Options not available for SIWAEDG Models					
COM1 Interfaces for DCP (Painted)					
Option		Application Level 1	Application Level 2	Application Level3	Price in USD
COM 1 Interface DCP - Painted					
A11	RS232 @COM1	Standard	-	-	\$0
A31	RS232 + Clock @COM1	-	Standard	Standard	\$0
A32	RS232 interface + Clock + PS2 Connection (IP43) @COM1		•	•	\$155

COM1 Interfaces for DCS (Stainless Steel)					
Option	Com 1 Interface DCS- Stainless Steel				Price in USD
A32	RS232 interface + Clock + PS2 Connection (IP43) @COM1	Standard	Standard	Standard	\$0

UniCOM interface Options					
Option	Description				Price in USD
A1	RS232 interface @uniCOM	•	•	•	\$297
A2	RS422 interface @uniCOM	•	•	•	\$297
A3	RS485 interface @uniCOM	•	•	•	\$297
A5	Digital 5 Input / 5 Output opto isolated	•	•	•	\$761
A15	Analog module for analog weighing platform (not in combination with option L9)		•	•	\$680
A9	Analog current output, 0-20 mA, 4-20 mA, 0-10V, 16-bit	•	•	•	\$761
B1	Profibus DP module (9pin D-SUB female connector)	•	•	•	\$1,182
B9	Ethernet TCP/IP and Modbus TCP interface	•	•	•	\$761

Power Supply Options					
Option	Description				Price in USD
L8	24 V Power Supply	•	•	•	\$134
L9	Internal rechargeable battery pack (10 hrs.of operation, 8 hrs. recharging time), with battery charger, incl. big indicator-housing Note : Superior display no longer possible!	•	•	•	\$492

Options					
Option	Description				Price in USD
X1	Disconnectable plug-in between indicator-platform, indicator with female connector (0.2 m) (for option A15)		•	•	\$183
Z3	Test report / Certificate	•	•	•	\$286
I65	IP protection IP65 (hose-proof and dust-tight)	•	•	•	\$449
U1	Below weighing hanger (only for Supreme IP43/ SIWADCP), hook included	•	•	•	\$279

Cables for Stainless Steel models Only					
Option	Description				Price in USD
M38	Ethernet connecting cable with RJ45 male connector, 7 m				\$153

* 2 not available for Signum Advanced BBP (1.5kg) and Signum Supreme BBP (620 g)

* 5 for IP65 only available on request

AD converter (A15) and battery pack (L9) cannot be combined

Signum Accessories, Painted IP43 versions- Can be added in the Field

*For Stainless Steel Signum see next page

UniCOM interface - models DCP & EDG (Painted Platforms)

Order no.	Description	Price in USD
YDO01SW-232	Interface module RS232	\$468
YDO01SW-485/422	Interface module RS485/422	\$468
YDO01SW-AO	Analog out 0/4-20 mA, 0-10V, 16bit	\$1,115
YDO01SW-DIO	Digital 5 control inputs / 5 control outputs	\$1,115
YDO01SW-ETH	Ethernet TCP/IP and Modbus TCP interface for models DCP	\$1,115
YDO01SW-DP	Profibus DP interface	\$1,667
YAS01SW-CON	Adapter plate for later installation of an UNICOM interface	\$67

UniCOM interface - models BBP (Painted Platforms)

Order no.	Description	Price in USD
YDO03SW-232	Interface module RS232	\$468
YDO03SW-485/422	Interface module RS485/422	\$468
YDO03SW-AO	Analog out 0/4-20 mA, 0-10V, 16bit	\$1,115
YDO03SW-DIO	Digital 5 control inputs / 5 control outputs	\$1,085
YDO03SW-ETH	Ethernet TCP/IP and Modbus TCP interface	\$1,085
YDO03SW-DP	Profibus DP interface	\$1,667

Cables (Painted Platforms)

Order no.	Description	Price in USD
YCC01-USBM2	Connecting cable from RS232 to USB-Connector, 2 m	\$277

Electrical accessories

Order no.	Description	Price in USD
YAS02MI	24V industrial power supply module	\$283

Mechanical accessories (Painted Platforms)

Order no.	Description	Price in USD
YDH01P	Display column for series for models CASE-SPC*, SIW*DCP*, ISDCP* column height 500 mm	\$674
YDH02P	Display column for series for models CASLE-SPC*, SIW*BBP*, ISBBP* column height 400 mm	\$721
YDH02CWSUS	Post mount assembly for Combics 12"x12" platforms, 19" High; Stainless Steel	\$337
YDH12CWSUS	Stainless Steel Indicator Bracket for Benchtop Imperial size Combics 10x10, 12x12, and 18x18"; also, Midrics & Combics metric size platforms DC, ED and FE. Will also work with SIWAEDG platforms	\$143

Others

Order no.	Description	Price in USD
YAS01CISL	IP65 upgrade kit for cable connectors (D-Sub 25), 3 covers	\$342
YDC01SW	Dust covers (2 units)	\$98
YBR05PS2	Bar code scanner, 120 mm scanning width (for CAISL, CAWP, SIW)	\$1,117

Signum Accessories, Stainless Steel Models- Can be added in the Field

Cables		
Order no.	Description	Price in USD
YCC01-03ISM5	Connecting cable to PC, 12-pin round male connector / 25-pin D-Submini female connector, 5 m	\$399
YCC01-09ISM5	Connecting cable to PC, 12-pin round male connector / 9-pin D-Submini female connector, 5 m	\$401
YCCDI-03M5	Connecting cable 12-pin round male connector to open-ended cable, 5 m	\$387
YCC01-0016M3	Connecting cable for Minebea Intec accessories (standard MP8/ MC1 interface), 12-pin round male connector / 25-pin D-Submini female connector, 3 m	\$438
YCC02-RJ45M7	Ethernet connecting cable with RJ45 male connector, 7 m	\$291
YCC01-01ISM6	Extension cable, 12-pin round male to 12-pin round female connector, 6 m	\$470
Electrical accessories		
Order no.	Description	Price in USD
YAS02MI	24V industrial power supply module	\$283
Columns for Model DCS (Stainless Steel Models)		Price in USD
Order no.	Description	Price in USD
YDH01CWS	Column, stainless steel, for attaching indicator to platform for 320x240(DC) Platform, height 330 mm	\$653
YDH02CWS	Column, stainless steel, for attaching indicator to platform, for sizes 400x300 (ED) and 500x400(FE), height 500 mm	\$739
YDH03CWS	Column, stainless steel, for attaching indicator - platform, for platform sizes: 500x400(FE), height 750 mm	\$835
Columns for Model BBS (Stainless Steel Models)		
Order no.	Description	Price in USD
YDH02S	Columns for model BBS, stainless steel, for attaching indicator to platform Column height 400 mm	\$810
Others		
Order no.	Description	Price in USD
YDC01SW	Dust covers (2 units)	\$98

IFP4 Flat-bed scales, painted




Order no.	Dimensions (A x B)		Capacity		Readability		Cable length	Platform Height (mm)	Shipping Weight (lb.)	Price in USD
	(in.)	(mm)	(lb.)	(kg)	(lb.)	(kg)				
IFP4-150GG-I	23.6 x 23.6	600 x 600	330	150	0.01	0.005	6 m	25	198	\$10,495
IFP4-150IG-I	31.5 x 23.6	800 x 600						25	221	\$10,637
IFP4-150II-I	31.5 x 31.5	800 x 800						25	243	\$10,744
IFP4-150LG-I	39.4 x 23.6	1000 x 600						25	243	\$10,744
IFP4-150LI-I	39.4 x 31.5	1000 x 800						25	265	\$10,876
IFP4-150LL-I	39.4 x 39.4	1000 x 1000						25	375	\$11,555
IFP4-150NL-I	49.2 x 39.4	1250 x 1000						25	397	\$11,761
IFP4-150NN-I	49.2 x 49.2	1250 x 1250						25	481	\$12,194
IFP4-150RN-I	59.1 x 49.2	1500 x 1250						25	547	\$12,811
IFP4-150RR-I	59.1 x 59.1	1500 x 1500						35	628	\$13,493
IFP4-150WR-I	78.7 x 59.1	2000 x 1500						35	739	\$13,919
IFP4-300GG-I	23.6 x 23.6	600 x 600	660	300	0.02	0.01	6 m	25	198	\$10,495
IFP4-300IG-I	31.5 x 23.6	800 x 600						25	221	\$10,637
IFP4-300II-I	31.5 x 31.5	800 x 800						25	243	\$10,744
IFP4-300LG-I	39.4 x 23.6	1000 x 600						25	243	\$10,744
IFP4-300LI-I	39.4 x 31.5	1000 x 800						25	265	\$10,876
IFP4-300LL-I	39.4 x 39.4	1000 x 1000						25	375	\$11,555
IFP4-300NL-I	49.2 x 39.4	1250 x 1000						25	397	\$11,761
IFP4-300NN-I	49.2 x 49.2	1250 x 1250						25	481	\$12,194
IFP4-300RN-I	59.1 x 49.2	1500 x 1250						25	547	\$12,811
IFP4-300RR-I	59.1 x 59.1	1500 x 1500						35	628	\$13,493
IFP4-300WR-I	78.7 x 59.1	2000 x 1500						35	739	\$13,919
IFP4-600GG-I	23.6 x 23.6	600 x 600	1320	600	0.05	0.02	6 m	25	198	\$10,495
IFP4-600IG-I	31.5 x 23.6	800 x 600						25	221	\$10,637
IFP4-600II-I	31.5 x 31.5	800 x 800						25	243	\$10,744
IFP4-600LG-I	39.4 x 23.6	1000 x 600						25	243	\$10,744
IFP4-600LI-I	39.4 x 31.5	1000 x 800						25	265	\$10,876
IFP4-600LL-I	39.4 x 39.4	1000 x 1000						25	375	\$11,555
IFP4-600NL-I	49.2 x 39.4	1250 x 1000						25	397	\$11,761
IFP4-600NN-I	49.2 x 49.2	1250 x 1250						35	481	\$12,194
IFP4-600RN-I	59.1 x 49.2	1500 x 1250						35	547	\$12,811
IFP4-600RR-I	59.1 x 59.1	1500 x 1500						35	628	\$13,493
IFP4-600WR-I	78.7 x 59.1	2000 x 1500						35	739	\$13,919
YFP01CWSUS	Stainless steel floor fasteners (2 fastening plates, 4 screws) 2.5" foot design									\$171

IFP4 Flat-bed scales, painted, cont.

Order no.	Dimensions (A x B)		Capacity		Readability		Cable length	Platform Height (mm)	Shipping Weight (lb.)	Price in USD
	(in.)	(mm)	(lb.)	(kg)	(lb.)	(kg)				
IFP4-1000GG-I	23.6 x 23.6	600 x 600	2200	1000	0.1	0.05	6 m	25	198	\$10,495
IFP4-1000IG-I	31.5 x 23.6	800 x 600						25	221	\$10,637
IFP4-1000II-I	31.5 x 31.5	800 x 800						25	243	\$10,744
IFP4-1000LG-I	39.4 x 23.6	1000 x 600						25	243	\$10,744
IFP4-1000LI-I	39.4 x 31.5	1000 x 800						25	265	\$10,876
IFP4-1000LL-I	39.4 x 39.4	1000 x 1000						25	375	\$11,555
IFP4-1000NL-I	49.2 x 39.4	1250 x 1000						25	397	\$11,761
IFP4-1000NN-I	49.2 x 49.2	1250 x 1250						35	481	\$12,194
IFP4-1000RN-I	59.1 x 49.2	1500 x 1250						35	547	\$12,811
IFP4-1000RR-I	59.1 x 59.1	1500 x 1500						45	628	\$13,493
IFP4-1000WR-I	78.7 x 59.1	2000 x 1500						45	739	\$13,919
IFP4-1500II-I	31.5 x 31.5	800 x 800	3300	1500	0.1	0.05	6 m	25	243	\$10,744
IFP4-1500LG-I	39.4 x 23.6	1000 x 600						25	243	\$10,744
IFP4-1500LI-I	39.4 x 31.5	1000 x 800						35	265	\$10,876
IFP4-1500LL-I	39.4 x 39.4	1000 x 1000						35	375	\$11,555
IFP4-1500NL-I	49.2 x 39.4	1250 x 1000						35	397	\$11,761
IFP4-1500NN-I	49.2 x 49.2	1250 x 1250						35	481	\$12,194
IFP4-1500RN-I	59.1 x 49.2	1500 x 1250						35	547	\$12,811
IFP4-1500RR-I	59.1 x 59.1	1500 x 1500						45	628	\$13,493
IFP4-1500WR-I	78.7 x 59.1	2000 x 1500						45	739	\$13,919
IFP4-3000LL-I	39.4 x 39.4	1000 x 1000	6600	3000	0.2	0.1	6 m	45	375	\$11,555
IFP4-3000NL-I	49.2 x 39.4	1250 x 1000						45	397	\$11,761
IFP4-3000NN-I	49.2 x 49.2	1250 x 1250						45	481	\$12,194
IFP4-3000RN-I	59.1 x 49.2	1500 x 1250						45	547	\$12,811
IFP4-3000RR-I	59.1 x 59.1	1500 x 1500						45	628	\$13,493
IFP4-3000WR-I	78.7 x 59.1	2000 x 1500						45	739	\$13,919
YFP01CWSUS	Stainless steel floor fasteners (2 fastening plates, 4 screws) 2.5" foot design									\$171

Options: IFP4 platforms painted

Option	Others	Platform dimensions L x W in mm										Price in USD	
		GG	IG	II	LG	LI	LL	NL	NN	RN	RR		WR
		600 x 600	800 x 600	800 x 800	1000 x 600	1000 x 800	1000 x 1000	1250 x 1000	1250 x 1250	1500 x 1250	1500 x 1500	2000 x 1500	
T14	Integrated Column				•	•	•	•	•	•	•	•	\$2,490
T4	Stop bar	•	•	•	•	•	•	•	•	•	•	•	\$694
T15	2nd ramp (drive-through)	•	•	•	•	•	•	•	•	•	•	•	\$2,178
	Stainless steel cable shroud												On request
	Certificates												
Z3	Test report / Certificate	•	•	•	•	•	•	•	•	•	•	•	\$333

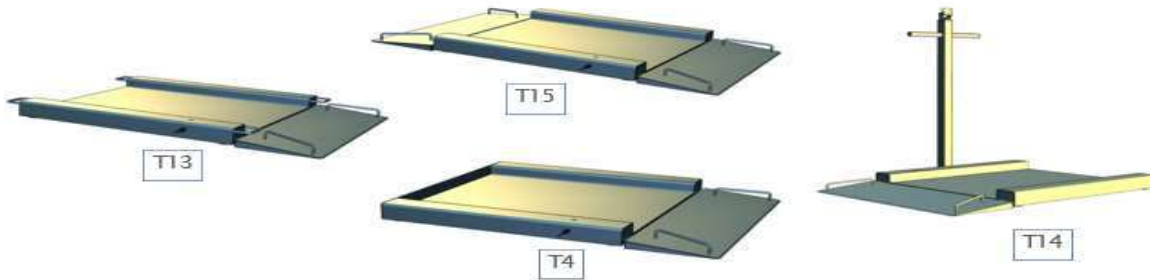


IFS4 Flat-bed scales, stainless steel

1. Part: Selection of the platform										
Order no.	Dimensions (A x B)		Capacity		Readability		Cable length	Platform Height (mm)	Shipping Weight (lb.)	Price in USD
	(in.)	(mm)	(lb.)	(kg)	(lb.)	(kg)				
IFS4-150GG-I	23.6 x 23.6	600 x 600	330	150	0.01	0.005	6 m	25	198	\$15,873
IFS4-150IG-I	31.5 x 23.6	800 x 600						25	221	\$16,154
IFS4-150II-I	31.5 x 31.5	800 x 800						25	243	\$16,429
IFS4-150LG-I	39.4 x 23.6	1000 x 600						25	243	\$16,975
IFS4-150LI-I	39.4 x 31.5	1000 x 800						25	265	\$17,553
IFS4-150LL-I	39.4 x 39.4	1000 x 1000						25	375	\$18,372
IFS4-150NL-I	49.2 x 39.4	1250 x 1000						25	397	\$19,104
IFS4-150NN-I	49.2 x 49.2	1250 x 1250						25	481	\$19,915
IFS4-150RN-I	59.1 x 49.2	1500 x 1250						25	547	\$20,691
IFS4-150RR-I	59.1 x 59.1	1500 x 1500						35	628	\$21,471
IFS4-150WR-I	78.7 x 59.1	2000 x 1500						35	739	\$22,255
IFS4-300GG-I	23.6 x 23.6	600 x 600	660	300	0.02	0.01	6 m	25	198	\$15,873
IFS4-300IG-I	31.5 x 23.6	800 x 600						25	221	\$16,154
IFS4-300II-I	31.5 x 31.5	800 x 800						25	243	\$16,429
IFS4-300LG-I	39.4 x 23.6	1000 x 600						25	243	\$16,975
IFS4-300LI-I	39.4 x 31.5	1000 x 800						25	265	\$17,553
IFS4-300LL-I	39.4 x 39.4	1000 x 1000						25	375	\$18,372
IFS4-300NL-I	49.2 x 39.4	1250 x 1000						25	397	\$19,104
IFS4-300NN-I	49.2 x 49.2	1250 x 1250						25	481	\$19,915
IFS4-300RN-I	59.1 x 49.2	1500 x 1250						25	547	\$20,691
IFS4-300RR-I	59.1 x 59.1	1500 x 1500						35	628	\$21,471
IFS4-300WR-I	78.7 x 59.1	2000 x 1500						35	739	\$22,255
IFS4-600GG-I	23.6 x 23.6	600 x 600	1320	600	0.05	0.02	6 m	25	198	\$15,873
IFS4-600IG-I	31.5 x 23.6	800 x 600						25	221	\$16,154
IFS4-600II-I	31.5 x 31.5	800 x 800						25	243	\$16,429
IFS4-600LG-I	39.4 x 23.6	1000 x 600						25	243	\$16,975
IFS4-600LI-I	39.4 x 31.5	1000 x 800						25	265	\$17,553
IFS4-600LL-I	39.4 x 39.4	1000 x 1000						25	375	\$18,372
IFS4-600NL-I	49.2 x 39.4	1250 x 1000						25	397	\$19,104
IFS4-600NN-I	49.2 x 49.2	1250 x 1250						35	481	\$19,915
IFS4-600RN-I	59.1 x 49.2	1500 x 1250						35	547	\$20,691
IFS4-600RR-I	59.1 x 59.1	1500 x 1500						35	628	\$21,471
IFS4-600WR-I	78.7 x 59.1	2000 x 1500						35	739	\$22,255
YFP01CWSUS	Stainless steel floor fasteners (2 fastening plates, 4 screws) 2.5" foot design									\$171

IFS4 Flat-bed scales, stainless steel, cont.

1. Part: Selection of the platform										
Order no.	Dimensions (A x B)		Capacity		Readability		Cable length	Platform Height (mm)	Shipping Weight (lb.)	Price in USD
	(in.)	(mm)	(lb.)	(kg)	(lb.)	(kg)				
IFS4-1000GG-I	23.6 x 23.6	600 x 600	2200	1000	0.1	0.05	6 m	25	198	\$15,873
IFS4-1000IG-I	31.5 x 23.6	800 x 600						25	221	\$16,154
IFS4-1000II-I	31.5 x 31.5	800 x 800						25	243	\$16,429
IFS4-1000LG-I	39.4 x 23.6	1000 x 600						25	243	\$16,975
IFS4-1000LI-I	39.4 x 31.5	1000 x 800						25	265	\$17,553
IFS4-1000LL-I	39.4 x 39.4	1000 x 1000						25	375	\$18,372
IFS4-1000NL-I	49.2 x 39.4	1250 x 1000						25	397	\$19,104
IFS4-1000NN-I	49.2 x 49.2	1250 x 1250						35	481	\$19,915
IFS4-1000RN-I	59.1 x 49.2	1500 x 1250						35	547	\$20,691
IFS4-1000RR-I	59.1 x 59.1	1500 x 1500						45	628	\$21,471
IFS4-1000WR-I	78.7 x 59.1	2000 x 1500						45	739	\$22,255
IFS4-1500II-I	31.5 x 31.5	800 x 800	3300	1500	0.1	0.05	6 m	25	243	\$16,429
IFS4-1500LG-I	39.4 x 23.6	1000 x 600						25	243	\$16,975
IFS4-1500LI-I	39.4 x 31.5	1000 x 800						35	265	\$17,553
IFS4-1500LL-I	39.4 x 39.4	1000 x 1000						35	375	\$18,372
IFS4-1500NL-I	49.2 x 39.4	1250 x 1000						35	397	\$19,104
IFS4-1500NN-I	49.2 x 49.2	1250 x 1250						35	481	\$19,915
IFS4-1500RN-I	59.1 x 49.2	1500 x 1250						35	547	\$20,691
IFS4-1500RR-I	59.1 x 59.1	1500 x 1500						45	628	\$21,471
IFS4-1500WR-I	78.7 x 59.1	2000 x 1500						45	739	\$22,255
IFS4-3000LL-I	39.4 x 39.4	1000 x 1000	6600	3000	0.2	0.1	6 m	45	375	\$18,372
IFS4-3000NL-I	49.2 x 39.4	1250 x 1000						45	397	\$19,104
IFS4-3000NN-I	49.2 x 49.2	1250 x 1250						45	481	\$19,915
IFS4-3000RN-I	59.1 x 49.2	1500 x 1250						45	547	\$20,691
IFS4-3000RR-I	59.1 x 59.1	1500 x 1500						45	628	\$21,471
IFS4-3000WR-I	78.7 x 59.1	2000 x 1500						45	739	\$22,255
YFP01CWSUS	Stainless steel floor fasteners (2 fastening plates, 4 screws) 2.5" foot design									\$171

Options: IFS4 Flat-bed scales, stainless steel														
Option		Dimensions (in.)										Price in USD		
		GG	IG	II	LG	LI	LL	NL	NN	RN	RR		WR	
		23.6 x 23.6	31.5 x 23.6	31.5 x 31.5	39.4 x 23.6	39.4 x 31.5	39.4 x 39.4	49.2 x 39.4	49.2 x 49.2	59.1 x 49.2	59.1 x 59.1	78.7 x 59.1		
AISI 304, 2B cold-rolled steel, Electropolished, typ.Ra ≤ 0,8μ														
R6	For all weighing capacities:	•	•	•	•	•	•	•	•	•	•	•	\$2,151	
AISI 316 Ti, 2B cold-rolled steel, Electropolished, typ.Ra ≤ 0,4μ														
R2	For all weighing capacities:	•											\$2,923	
			•										\$2,923	
				•										\$2,923
					•									\$2,923
						•								\$2,923
							•							\$2,923
								•						\$3,287
									•					\$3,562
										•				\$3,841
											•			\$4,113
										•		\$4,992		
Lifting devices														
T7	Retractable Wheels		•*	•*	•	•	•	•	•	•	•	•	\$3,310	
T16	Lifting mechanism acc. to NIOSH (< 40lbs lifting force, 1 person) *3		•	•	•	•	•	•	•				\$4,527	
										•	•		\$13,868	
T17	Option T16 with T17, includes 2nd ramp for drive through operation *3 Must also include price of Option T16		•	•	•	•	•	•	•				\$2,903	
T10	Lifting mechanism (for more than 1 person, retrofittable) *3				•	•	•	•	•				\$2,443	
T11	Option T10, incl. 2nd ramp (drive-through) *3				•	•	•	•	•				\$5,002	
3 Option cannot be selected for models with 30,000 d resolution			• Retractable wheels on IG and II platforms are only available on units up to 600 kg capacity											

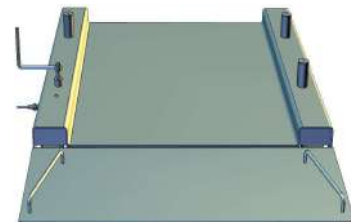

Options: IFS4 Flat-bed scales, stainless steel

		Dimensions (in.)										Price in USD
		GG	IG	II	LG	LI	LL	NL	NN	RN	RR	
		23.6 x 23.6	31.5 x 23.6	31.5 x 31.5	39.4 x 23.6	39.4 x 31.5	39.4 x 39.4	49.2 x 39.4	49.2 x 49.2	59.1 x 49.2	59.1 x 59.1	78.7 x 59.1
Option	Others											
L6	IP69K - Kit	•	•	•	•	•	•	•	•	•	•	•
Note: not for 150 kg models (150 kg = IP67)												
T4	Stop bar	•	•	•	•	•	•	•	•	•	•	•
T9	Bottom plate	•	•	•	•	•	•	•	•	•	•	•
T5	Towing bar (incl. stop bar)		•	•	•	•	•	•	•	•	•	
T6	2 x handles, 2 x rollers	•	•	•	•	•	•					
T13	4 handles (2 on front side, 2 on back side)	•	•	•	•	•	•	•	•	•	•	•
T14	Integrated Column		•*1	•*1	•	•	•	•	•*2	•*2	•*2	
T15	2nd ramp (drive-through)	•	•	•	•	•	•	•	•	•	•	•
	Stainless steel cable shroud											On request
Certificates												
Z1	Certificate of surface roughness	•	•	•	•	•	•	•	•	•	•	•
Z2	Certificate material	•	•	•	•	•	•	•	•	•	•	•
Z3	Test report / Certificate	•	•	•	•	•	•	•	•	•	•	•

*1 for sizes IG + II, T14 in conjunction with T7 requires modification of adding the T14 to the T4 (stop bar).

Call Factory for pricing

*2 T5 recommended in conjunction with T7

Overview about option combinations IF flat-bed scales

Option	T4	T5	T6	T7	T9	T10	T11	T13	T14	T15	T16	T17
T4	-		x	x	x	x		x	x		x	
T5		-		x	x				x			
T6	x		-		x				x			
T7	x	x		-	x				x*	x		
T9	x	x	x	x	-	x	x	x	x	x	x	x
T10	x				x	-						
T11					x		-					
T13	x				x			-	x			
T14	x	x	x	x*	x			x	-	x		
T15				x	x				x	-		
T16	x				x						-	
T17					x							-

X Combination possible

* no combination possible for sizes IG + II

IS Series Platforms- High Resolution



IS Series Platforms		
Model Number	Description	Price USD
ISBBP-V1	IS High Resolution Weighing Platform • Capacity 1.3 lb. x 0.000002 lb. (0.62 kg x 0.001 g) Readability • Painted lower Platform with SS Load Plate, Size 4.5 inch (115mm) Round Weighing pan with windshield• Fast high resolution weighing processor • Integrated motorized calibration weight • RS485 or RS-232 interface via 12 pin Round Male Socket • Rugged, sturdy industrial construction • IP43 protection • 6.6 lb overload protection (Old Version ISBBP-06-H-E7)	\$4,172
ISBBP-V3	IS High Resolution Weighing Platform • Capacity 6.8 lb. x 0.00002 lb. (3.1 kg x 0.01 g) Readability • Painted lower Platform with SS Load Plate, Size 7.1 inch x 7.1 inch (182 x 182 mm) load plate • Fast high resolution weighing processor • Integrated motorized calibration weight • RS485 or RS-232 interface via 12 pin Round Male Socket • Rugged, sturdy industrial construction • IP65 protection • 66 lb. overload protection • suitable for ATEX Zone 2 and 22 (Old Version ISBBP-3-H-IP65-E7-Y2)	\$3,391
ISBBP-V6	IS High Resolution Weighing Platform • Capacity 13.5 lb. x 0.00002 lb. (6.1 kg x 0.01 g) Readability • Painted lower Platform with SS Load Plate, Size 7.1 inch x 7.1 inch (182 x 182 mm) load plate • Fast high resolution weighing processor • Integrated motorized calibration weight • RS485 or RS-232 interface via 12 pin Round Male Socket • Rugged, sturdy industrial construction • IP65 protection • 66 lb. overload protection • suitable for ATEX Zone 2 and 22 • (Old Version ISBBP-6-H-IP65-Y2)	\$3,975
ISBBS-V8	IS High Resolution Full SS Weighing Platform • Capacity 6.8 lb. x 0.00002 lb. (3.1 kg x 0.01 g) Readability • SS lower Platform with SS Load Plate, Size 7.1 inch x 7.1 inch (182 x 182 mm) load plate • Fast high resolution weighing processor • Integrated motorized calibration weight • RS485 or RS-232 interface via 12 pin Round Male Socket • Rugged, sturdy industrial construction • IP65 protection • 66 lb. overload protection • suitable for ATEX Zone 2 and 22 (Old Version ISBBS-3-HCE-IP65-Y2)	\$6,479
ISBBS-V9	IS High Resolution Full SS Weighing Platform • Capacity 13.5 lb. x 0.00002 lb. (6.1 kg x 0.01 g) Readability • SS lower Platform with SS Load Plate, Size 7.1 inch x 7.1 inch (182 x 182 mm) load plate • Fast high resolution weighing processor • Integrated motorized calibration weight • RS485 or RS-232 interface via 12 pin Round Male Socket • Rugged, sturdy industrial construction • IP65 protection • 66 lb. overload protection • suitable for ATEX Zone 2 and 22 • Verifiable in European Market only (Old Version ISBBP-6-HCE-IP65-Y2)	\$7,010
ISDCS-V10	IS High Resolution Full SS Weighing Platform • Capacity 35 lb. x 0.0002 lb. (16 kg x 0.1 g) Readability • SS lower Platform with SS Load Plate, Size 14.5 inch x 10.25 inch (370 x 260 mm) load plate • Fast high resolution weighing processor • Integrated motorized calibration weight • RS485 or RS-232 interface via 12 pin Round Male Socket • Rugged, sturdy industrial construction • IP65 protection • 660 lb. overload protection • suitable for ATEX Zone 2 and 22 • Verifiable in European Market only (Old Version ISDCS-16-HCE-IP65-Y2)	\$5,946
ISDCS-V11	IS High Resolution Full SS Weighing Platform • Capacity 77 lb. x 0.0002 lb. (35 kg x 0.1 g) Readability • SS lower Platform with SS Load Plate, Size 14.5 inch x 10.25 inch (370 x 260 mm) load plate • Fast high resolution weighing processor • Integrated motorized calibration weight • RS485 or RS-232 interface via 12 pin Round Male Socket • Rugged, sturdy industrial construction • IP65 protection • 660 lb. overload protection • suitable for ATEX Zone 2 and 22 • Verifiable in European Market only (Old Version ISDCS-35-HCE-IP65-Y2)	\$7,140
ISEDE-16-H	IS High Resolution Weighing Platform • Fast high resolution weighing processor • Completely made of AISI 304 stainless steel • With RS485 or RS-232C interface, build-in 12-pin round male connector • size 15.75 inch x 11.8 inch (400 x 300) Capacity 35 lb. x 0.0002 lb. (16 kg x 0.1 g) Readability • Built in internal calibration weight • Monolithic weighing system • Overload protection 300 kg	\$5,158
ISEDE-34-H	IS High Resolution Weighing Platform • Fast high resolution weighing processor • Completely made of AISI 304 stainless steel • With RS485 or RS-232C interface, build-in 12-pin round male connector • size 15.75 inch x 11.8 inch (400 x 300) Capacity 75lb. x 0.0002 lb. (34kg x 0.1 g) Readability • Built in internal calibration weight • Monolithic weighing system • Overload protection 300 kg	\$5,851
ISEDE-64-S	IS High Resolution Weighing Platform • Fast high resolution weighing processor • Completely made of AISI 304 stainless steel • With RS485 or RS-232C interface, build-in 12-pin round male connector • size 15.75 inch x 11.8 inch (400 x 300) Capacity 141lb. x 0.0022 lb. (64kg x 1 g) Readability • Built in internal calibration weight • Monolithic weighing system • Overload protection 300 kg	\$6,367
ISEDE-64-H	IS High Resolution Weighing Platform • Fast high resolution weighing processor • Completely made of AISI 304 stainless steel • With RS485 or RS-232C interface, build-in 12-pin round male connector • size 15.75 inch x 11.8 inch (400 x 300) Capacity 141lb. x 0.00022 lb. (64kg x 0.1 g) Readability • Built in internal calibration weight • Monolithic weighing system • Overload protection 300 kg	\$8,787
ISFEG-64-S	IS High Resolution Weighing Platform • Fast high resolution weighing processor • Completely made of AISI 304 stainless steel • With RS485 or RS-232C interface, build-in 12-pin round male connector • size 22 inch x 17.7 inch (560 x 450) • Capacity 141lb. x 0.0022 lb. (64kg x 1 g) Readability • Built in internal calibration weight • Monolithic weighing system • Overload protection 300 kg	\$7,818
ISIGG-150-H	IS High Resolution Weighing Platform • Fast high resolution weighing processor • Completely made of AISI 304 stainless steel • With RS485 or RS-232C interface, build-in 12-pin round male connector • size 32 inch x 24 inch (800 x 600mm) • Capacity 330lb. x 0.0022 lb. (150kg x 1 g) Readability • Built in internal calibration weight • Monolithic weighing system • Overload protection 600 kg	\$8,468
ISIGG-300-H	IS High Resolution Weighing Platform • Fast high resolution weighing processor • Completely made of AISI 304 stainless steel • With RS485 or RS-232C interface, build-in 12-pin round male connector • size 32 inch x 24 inch (800 x 600mm) • Capacity 660lb. x 0.0044 lb. (300kg x 2 g) Readability • Built in internal calibration weight • Monolithic weighing system • Overload protection 600 kg	\$9,583

IS Series Platforms- High Resolution - Continued		
OPTIONS: Special Order Allow 2 additional weeks for delivery		
Model no.	Description	Price USD
ISEDE-16-DS1	IS High Resolution Weighing Platform • Fast high resolution weighing processor • Completely made of AISI 304 stainless steel • With RS485 or RS-232C interface, build-in 12-pin round male connector • size 15.75 inch x 11.8 inch (400 x 300) Capacity 35 lb. x 0.00002 lb. (16 kg x 0.01 g) Readability • Built in internal calibration weight • Monolithic weighing system • Overload protection 300 kg	\$6,405
ISIGG-150-DS1	IS High Resolution Weighing Platform • Fast high resolution weighing processor • Completely made of AISI 304 stainless steel • With RS485 or RS-232C interface, build-in 12-pin round male connector • size 32 inch x 24 inch (800 x 600mm) • Capacity 330lb. x 0.00022 lb. (150kg x 0.1 g) Readability • Built in internal calibration weight • Monolithic weighing system • Overload protection 600 kg	\$9,867
ISIGG-300-DS1	IS High Resolution Weighing Platform • Fast high resolution weighing processor • Completely made of AISI 304 stainless steel • With RS485 or RS-232C interface, build-in 12-pin round male connector • size 32 inch x 24 inch (800 x 600mm) • Capacity 660lb. x 0.00044 lb. (300kg x 0.2 g) Readability • Built in internal calibration weight • Monolithic weighing system • Overload protection 600 kg	\$11,033

*Please note that the -H1 high resolution upgrade has been changed to -DS1

Indicators for direct connection with IS platforms		
Model no.	Description	Price USD
CAISL1-UV1	Combics 1 (IP44) pre-wired for direct connection to IS platform	\$1,919
CAISL2-UV1	Combics 2 (IP44) pre-wired for direct connection to IS platform	\$2,233
CAISL3-UV1	Combics 3 (IP44) pre-wired for direct connection to IS platform	\$2,698
CAIS1-UV1	Combics 1 (IP69k) pre-wired for direct connection to IS platform	\$2,208
CAIS2-UV1	Combics 2 (IP69k) pre-wired for direct connection to IS platform	\$2,639
CAIS3-UV1	Combics 3 (IP69k) pre-wired for direct connection to IS platform	\$3,146

Accessories for IS Series

Interfaces

Order no.	Description	Price in USD
YDO59IS	Data interface with 3-m cable (IP67/ RS-485) and round connector; electrically isolated	\$1,278
YDO52IS	Data interface with 3-m cable (IP67/ RS232/RS423) and round connector; for -FEG or -IGG models	\$1,079
YDO58IS	Data interface with 3-m cable (IP67/ RS-232) and round connector	\$1,079
YDO56IS	Data output port, RS-232 D-Sub 9-pin female, (PC connection), length: 6 m	\$1,278
YDO57IS	Data output port, RS-232 D-Sub 25-pin female connector (PC connection) length: 6 m	\$1,278
YDO54IS	Data interface (IP65/ RS232) round connector for IS06BBE, IS2CCE, IS6CCE, IS12CCE	\$696

Cables

Order no.	Description	Price in USD
YCC01-01ISM6	Extension cable, 12-pin round male to 12-pin round female connector, 6 m	\$470
YCC01-0017D2	Connecting cable, from round connector to PC, 25-pin D- Sub, (YDO52IS/YDO54IS/YDO58IS required), 0.2 m	\$389
69QC0010	Round male connector for customizing own cables (quick disconnect with 69QC0011) 12-pin	\$149
69QC0011	Round female connector for customizing own cables (quick disconnect with 69QC0010) 12-pin, IP65	\$157

Mechanical Accessorioes

Order no.	Description	Price in USD
YEG04IP	Pit frame, painted, for platform dimensions (WxD) 800 x 600 mm	\$1,818
YEG01IP	Pit frame, stainless steel, for platform dimensions (WxD) 800 x 600 mm	\$5,821
YAS04IS	Installation hardware for pit frames; required to install YEG01IP and YEG04IP	\$749
YAR10IS	Drive-on ramp for -IGG models (painted), incl. installation kit. Stainless steel on request (IE10817)	\$2,009
YDH02CHE	Column painted for attaching the indicator to the platform 400x300(DC), height 500 mm	\$680

Printers and Accessories

Printers

Order no.	Description	Price in USD
YDP21-US	Needle high speed matrix printer up to 57 mm paper width with internal power supply 115V (US)	\$1,355
ZD421t	Strip or label printer, prints barcodes with direct thermal printer head (ink ribbon cartridges needed) up to 108 mm paper width with external power supply 115V (US)	\$3,947
ZD421d	Strip or label printer, prints barcodes with direct thermal printer head up to 108 mm paper width with external power supply 115V (US)	\$3,527

Cables

Order no.	Description	Price in USD
YCC01-0016M3	Connecting cable for Minebea Intec accessories (standard MP8/ MC1 interface), 12-pin round male connector / 25-pin D-Submini female connector, 3 m	\$438
YCC02-RJ45M7	Ethernet connecting cable with RJ45 male connector, 7 m	\$291
YCC01-01ISM6	Extension cable, 12-pin round male to 12-pin round female connector, 6 m	\$470



Accessories: Printers and Scanners

Please order printer paper at the same time.

Labels

Order no.	Description	ZD420d	ZD420t	YDP20	YDP21	Price in USD
69Y03092	Labels 58 x 30 mm (quantity of 1000)	√	√			\$52
69Y03093	Labels 58 x 76 mm (quantity of 500)	√	√			\$54
69Y03094	Labels 58 x 100 mm (quantity of 380)	√	√			\$64
69Y03247	Adhesive labels, normal paper, endless roll 20 m 57 mm			√	√	\$64

Printer Paper

Order no.	Description	ZD420d	ZD420t	YDP20	YDP21	Price in USD
69Y03090	3 paper rolls;60 mm x 75 m, thermo paper	√				\$94
69Y03196	1 roll of thermo paper, 101mm x 75 m	√				\$68
6906937	Printer paper 40 m (package of 5 rolls)			√	√	\$72

Ribbons

Order no.	Description	ZD420d	ZD420t	YDP20	YDP21	Price in USD
69Y03234	3 ink ribbon cartridges		√			\$259
6906918	Ribbon cartridge (spare)			√		\$102
69Y03952	3 ribbon cartridges (spare)				√	\$147

Others

Order no.	Description	ZD420d	ZD420t	YDP20	YDP21	Price in USD
YPP01CWS	Plate for attaching indicator and printer to bench stand	√	√	√	√	\$338

Hand Bar Code Scanners

Barcode Scanner

- Optical and acoustic operator feedback
- Processes a wide variety of bar codes- up to 120 mm code width
- Green LED for identification of correct scanning



Order no.	Description	Price USD
YBR05FC	Bar code scanner , with cable for connection to CAIS, CAWS, CAH..., MIS; 120 mm scanning width	\$1,117
YBR05PS2	Bar code scanner, 120 mm scanning width (for CAISL, CAWP, SIW)	\$1,117
YBR05USB	Bar code scanner, 120 mm scanning width with USB	\$1,117

Barcode Scanner- Accessories

Order no.	Description	Price USD
YBH01CWS	Retainer for bar code scanner, for attachment to bench stand	\$250
YCC02-BR02	Connecting cable for bar code reader YBR05FC, - 5-pin DIN-female connector, 1 m	\$291

Barcode Scanner - Connections

Bar code reader	Bar code reader Can be connected to:	Connecting cable required: (or adequate option)	Price USD
YBR05PS2	Bar code scanner, 120 mm scanning width (for CAISL, CAWP, SIW)		\$1,117
YBR05FC	Bar code scanner , with cable for connection to CAIS, CAWS, CAH..., MIS; 120 mm scanning width		\$1,117
YBR05FC	Bar code scanner , with cable for connection to CAIS, CAWS, CAH..., MIS; 120 mm scanning width		\$1,117

- Bluetooth modules for your wireless data transmission devices
- Easy connecting between two devices
- Energy saving due to low power consumption



Bluetooth-Dongle

Description	Price USD
YDO02C-BTPC	\$804
YDO02C-BTPRT	\$771
YCC02C-BTPC	\$727
YCC02C-BTPRT	\$692

Bluetooth® Module	Combics	Midrics	Signum	Adapter required
YDO02C-BTPC YDO02C-BTPRT	CAIS1, CAIS2, CAIS3, CAS*E, CAS*G, CAW*S	MIS1, MIS2 MW*P, MW*S		
YCC02C-BTPRT	CAISL1, CAISL2, CAISL3, CAW*P		SIWS- BBP, -DCP SIWA-BBP, -DCP	With D-Sub-25 adapter (included)
	CAW*P		SIWR-DCP	

Combics 2 Explosion-Proof Indicator



Measurement
Canada

FM approved indicator for direct connection with Analog Platforms

Order no.	Description	Price in USD
CAIXS2-U	Combics 2 EX-Indicator; Stainless steel housing with cable gland; Integrated A/D converter; Standard 1 x RS232 interface; Pre-assembled adapter cable for power supply modules	\$2,757

FM approved indicator for direct connection with IS-X platforms

Order no.	Description	Price in USD
CAIXS2-U1	Combics 2 Ex Indicator (CAIXS2-U) 485 Interface (A19 Option) Cable from Combics Indicator to ISX Digital Platform (M26 Option)	\$3,300

- Requires display power supply
- For US applications - Requires single YPS02-XUR for hazardous area connection or YPS02-ZKR for safe area connection
- For Canadian applications - Requires single YPS02-ZKR Power Supply located in the safe area while the indicator & Scale is in the Hazardous Area

Accessory Combics Ex-Indicator

Interfaces

Order no.	Description	Price in USD
YDO07-X	Interface for digital platform (RS232 or RS485 selectable)	\$489

Zener barriers

Order no.	Description	Price in USD
YDI05-ZU1	Hazardous area converter RS-232/RS485 Input - RS-232/RS485 Output (A24) incl. 65 ft. cable with open cable ends for CAIXS2-U (M51)	\$1,247

Electrical accessories

Order no.	Description	Price in USD
YPS02-XUR	Power supplies for installation in hazardous areas USA can be installed in zone 1, 21 resp. DIV 1,	\$2,298
YPS02-ZKR	Power supplies for installation in safe area USA / Canada ATEX: II (2) G [EEEx ib] IIC (65 feet of Intrinsically Safe Cable)	\$1,595
YRB02-X	Rechargeable battery pack in hazardous areas, Nonincendive Class I, II, III, Division 2, Groups A, B, C, D, E, F and G. Temperature Code T4 -20°C ≤ Ta ≤ +40°C hazardous (classified) locations for indoor use only. (charger has to be ordered separately YRB02LD)	\$1,815
YRB02-LD	Battery charger for YRB02-X rechargeable battery pack (for use only outside the hazardous area)	\$334

Cables

Order no.	Description	Price in USD
YCC02-XR14F02	Connecting cable for Ex Interface converter YDI05-Z with indicator CAIXS2, open-ended cable for installation to the indicator via cable gland, 14 pin round female connector, IP65, 0.2 m	\$328
YCC02-XR14M6	Connecting cable for connecting a compact scale/platform with indicator CAIXS2, open-ended cable for installation via cable gland to the indicator, 14-pin round male connector, IP65, 6 m	\$177
YCC485-X	Cable without connectors, 1m (3.28 ft.) 2x0.22 LiYCY, blue sheath, recommended, e.g., for RS-485 interface, 1 m = 1 piece.	\$18
YCC01-03ISM5	Connecting cable to PC, 12-pin round male connector / 25-pin D-Submini female connector, 5 m	\$399
YCC01-09ISM5	Connecting cable to PC, 12-pin round male connector / 9-pin D-Submini female connector, 5 m	\$401
YCC422-X	Cable without connectors, 1m (3.28 ft.), LiY6x(2x0.14C)Y, blue sheath, recommended e.g., for RS-422 interface, digital IN, 1 m = 1 piece.	\$18

Others

Order no.	Description	Price in USD
YDC01CI-X	2 Dust covers for CAIXS2	\$110

Midrics 1 Ex- Hazardous Area Indicator



FM/CSA Class I, II, III Div. 1 (USA/Canada)
 Resolutions of up to 30,000 d ensure precise measuring results
 Stainless steel 1.4301/AISI 304
 IP protection rating IP66
 Display 20 mm weight readout (14 segments) plus application symbols



Easy Configurations for Midrics 1 Ex Applications

Order no.	Description	Price in USD
Midrics 1 EX Indicator configured for connection to Analog Platform		
MIXS1-A21-X5	Midrics 1Ex configured for connection to Analog Platform. Included pigtail for connection to EX Power Supply (4 pin Round) and RS-232 Output	\$1,816

Midrics 1 EX Indicator configured for connection to Minebea Intec Digital Platform (SIWX., ISX..)		
MIXS1-A21-X5-M13	Midrics 1Ex configured for connection to Minebea Intec Digital Platform. Included pigtail for connection to EX Power Supply and Pigtail for connection to Minebea Intec Digital Platform via RS-232 Output	\$2,019

Midrics 1 EX Indicator configured for connection to Analog Platform and Printer in Safe Area less than 65 feet		
MIXS1-A21-X5-YDI05-ZU1	Midrics 1Ex configured for connection to Analog Platform with connection to Printer or PC located in Safe area less than 65 feet away. Includes; Midrics 1Ex Indicator set up to connect to Analog Platform via Cable Gland, Pigtail for connection to Ex Power Supply; Barrier with open ended cable for direct connection to the MIX1S. The output will be RS-232 for printers and PC's. An additional 12 Pin Round cable to DP9 needs to be ordered in order to connect PC or Printer.	\$3,062

Midrics 1 EX Indicator configured for connection to Analog Platform and Printer in Safe Area between 65-1000 feet		
MIXS1-A22-X5-YDI05-ZU3	Midrics 1Ex configured for connection to Analog Platform and connection to Printer or PC located in Safe area greater than 65 feet away. Includes; Midrics 1Ex Indicator set up to connect to Analog Platform via Cable Gland, Pigtail for connection to Ex Power Supply; Barrier with open ended cable for direct connection to the MIX1S. The MIXS1 Output used is RS422 and the Barrier Output is RS-232 connection to the printer or PC's. The YCC422-X Cable must be ordered to the required length up to max 1000 feet(330m); Sold by the meter	\$2,967
YCC422-X	Cable without connectors, 1m (3.28 ft.), LiY6x(2x0.14C)Y, blue sheath, recommended e.g., for RS-422 interface, digital IN, 1 m = 1 piece.	\$18

Order no.	Description	Price in USD
MIXS1	Midrics® 1 Ex indicator for potentially explosive atmospheres; Display 20mm LCD, backlit,5 Keys; Material: stainless steel, (ATEX Zone 1/21; IECEx Zone 1/21; FM Class I, II, III Div. 1 (USA/Canada))	\$1,597

OPTIONS: Midrics 1 Ex-Indicator

COM1 Communication Interfaces		
Order no.	Description	Price in USD
A21	Midrics 1 Ex COM1 RS232 for Zone 2+22	\$77
A22	Midrics 1 Ex COM1 RS422 for Zone 2+22	\$77
Order no.	Indicator Pigtail for Quick Disconnect of Analog Platform	Price in USD
X2	Adapter cable for connecting indicator WP1 and platform, 0.2 m, 12-pin round socket (connector for platform enclosed separately)	\$237
Order no.	Indicator Pigtail for Quick Disconnect of Intrinsically Safe Power Supply	Price in USD
X5	Adapter cable for connection to Ex power supply units / batteries, 0.2m, 8-pin round plug- for Zone 2+22	\$141
Order no.	Indicator Pigtail for Quick Disconnect of COM1 Communication	Price in USD
M14	Adapter cable for connection with interface converter (RS232), 0.2m, 14-pin round socket	\$141
M21	Adapter cable for connection with interface converter (RS422), 0.2m, 14-pin round socket	\$151
N39	Connection cable for second display (RS232), 14-pin round plug, 6m	\$151

ACCESSORIES: Midrics 1 Ex-Indicator

Order no.	Important: Here you will only find product-specific accessories for Midrics 1 Ex	Price in USD
YCC03-XR4M02	Adapter cable for connection to Ex power supply units / batteries, 0.2m, 8-pin round plug (X5)	\$141
YCC03-XR12F02	Adapter cable for connecting indicator WP1 and platform, open cable ends for mounting via cable gland on the indicator, 0.2m, 12-pin round socket (X2)	\$237
YDI05-Z	Interface converter for installation in non-hazardous areas, for connection to peripherals located in the non-hazardous area, versions: RS232-RS232 or RS422-RS232	\$963
YAS03MI	Kit for attaching the indicator to a switch cabinet	\$261
Order no.	Ex Rated Power Supply	Price in USD
YPS08-Y	Power supply units for installation in the potentially explosive atmosphere (100–240 V) FM (US) DIV 2	\$1,199
YPS08-Z	Power supply units for installation in the safe area (100–240 V) ATEX/IECEx/FM	\$1,168
Order no.	Cables	Price in USD
YCC03-XR14M6	Connection cable for second display (RS232), 14-pin round Male, 6m	\$151
YCC02-XR14F02	Connecting cable for Ex Interface converter YDI05-Z with indicator CAIXS2, open-ended cable for installation to the indicator via cable gland, 14 pin round female connector, IP65, 0.2 m	\$328
YCC04-XR14F02	Adapter cable for connection with interface converter (RS422), 0.2m, 14-pin round socket	\$151
YCC422-X	Cable without connectors, 1m (3.28 ft.), LiY6x(2x0.14C)Y, blue sheath, recommended e.g., for RS-422 interface, digital IN, 1 m = 1 piece.	\$18
YCC485-X	Cable without connectors, 1m (3.28 ft.) 2x0.22 LiYCY, blue sheath, recommended, e.g., for RS-485 interface, 1 m = 1 piece.	\$18
YAS04CIS-X	Cable gland (PG) for cables 4.5 up to 9 mm, IP67 protected, M16 x 1.5	\$102
69Y03166	Round male connector for customizing own cables, 14-pin; IP65	\$194
Order no.	Mechanical Accessories	Price in USD
YDH01CIS	Wall holder stainless steel	\$246
YDH02CIS	Brackets for wall mounting, stainless steel, tiltable indicator	\$362

Combics Ex-stainless steel platforms- Imperial Sizes

FM Approved: Class 1,2,3, Division 1, Groups ABCDEFGT4



Platform Selection								
Order no.	Dimensions (A x B) (in.)	Capacity		Readability		Cable length (ft.)	Shipping Weight (lb.)	Price in USD
		(lb.)	(kg)	(lb.)	(kg)			
CAPXS1U-10CC	10 x 10	15	6	0.0005	0.0002	10	16	\$1,443
CAPXS1U-20CC	10 x 10	30	15	0.001	0.0005	10	16	\$1,390
CAPXS1U-50CC	10 x 10	60	30	0.002	0.001	10	16	\$1,482
CAPXS1U-50DD	12 x 12	60	30	0.002	0.001	10	24	\$1,587
CAPXS1U-50EE	18 x 18	60	30	0.002	0.001	10	62	\$2,037
CAPXS1U-100DD	12 x 12	150	60	0.005	0.002	10	24	\$1,624
CAPXS1U-100EE	18 x 18	150	60	0.005	0.002	10	62	\$2,047
CAPXS4U-100GG	24 x 24	150	60	0.005	0.002	10	121	\$6,640
CAPXS4U-100HH	30 x 30	150	60	0.005	0.002	10	187	\$7,339
CAPXS1U-200EE	18 x 18	200	100	0.01	0.005	10	62	\$2,098
CAPXS4U-250GG	24 x 24	300	150	0.01	0.005	10	121	\$6,740
CAPXS4U-250HH	30 x 30	300	150	0.01	0.005	10	187	\$7,339
CAPXS4U-500GG	24 x 24	600	300	0.02	0.01	10	121	\$6,740
CAPXS4U-500HH	30 x 30	600	300	0.02	0.01	10	187	\$7,339
CAPXS4U-1000HH	30 x 30	1500	600	0.05	0.02	10	187	\$7,339
CAPXS4U-1000KK	36 x 36	1500	600	0.05	0.02	20	250	\$9,033
CAPXS4U-1000NN	48 x 48	1500	600	0.05	0.02	20	390	\$11,573
CAPXS4U-2500KK	36 x 36	3000	1500	0.1	0.05	20	250	\$9,033
CAPXS4U-2500NN	48 x 48	3000	1500	0.1	0.05	20	390	\$11,291
CAPXS4U-5000KK	36 x 36	6000	3000	0.2	0.1	20	250	\$9,033
CAPXS4U-5000NN	48 x 48	6000	3000	0.2	0.1	20	390	\$11,291

Options Combics Ex-stainless steel platforms- Metric Size

FM Approved: Class I,II,III, Division 1, Groups ABCDEFGT4

*All options listed require fabrication in Germany with European sizes. The top section indicates the European size platform (in mm) and price. Prices of the options are listed down the right-hand column. Add the two prices together to get the pricing of the platform with the requested option. A list of the corresponding capacities can be found at the bottom of the page.

		DC	ED	FE	GF	IG	II	LI	LL	NL	NN	RN	RR	WR		
		320 x 240	400 x 300	500 x 400	650 x 500	800 x 600	800 x 800	1000 x 800	1000 x 1000	1250 x 1000	1250 x 1250	1500 x 1250	1500 x 1500	2000 x 1500		
Option		\$3,303	\$3,911	\$4,593	\$6,450	\$7,306	\$8,817	\$10,329	\$11,154	\$11,886	\$11,802	\$12,411	\$12,931	\$15,791	Price in USD	
Load plate finishing (only one choice possible)																
R2	Electropolished Stainless Steel, 316 Ti	X													\$492	
			X												\$581	
				X											\$710	
					X										\$972	
						X									\$1,122	
							X								\$2,246	
								X	X	X						\$2,467
											X	X				\$2,994
													X			\$3,273
												X		\$3,927		
Others																
T1	Pressure Lift System						X	X	X						\$1,377	
										X					\$1,471	
											X	X			\$1,576	
													X		\$1,701	
														X		\$1,882
Certificates																
Z3	Test report	X	X	X	X	X	X	X	X	X	X	X	X	X	\$276	
Platform Frame finishing (Not Pit Frame)																
S2	Platform Frame in stainless steel AISI 316Ti Electropolished	X													\$1,105	
			X												\$1,516	
				X											\$2,100	
					X										\$2,449	
						X									\$2,862	
							X	X	X						\$3,940	
										X					\$4,218	
											X	X			\$4,489	
													X		\$4,804	
												X	\$5,247			

Platform Capacities in kg:

CAPXS1:	CAPXS4:		
DC-3/6/15	GF-60/150/300	LI-300/600/1500/3000	NN-150/300/600/1500/3000
ED-30/60	IG-60/150/300/600	LL-150/300/600/1500/3000	RN-600/1500/3000
FE-30/60/150	II-150/300/600/1500/3000	NL-600/1500/3000	RR-600/1500/3000
			WR-600/1500/3000

Example: CAPXS1-3DC, CAPXS4-150IG

Explosion protected scales for hazardous areas - IFXS4 Flat-bed scales, stainless steel

USA (FM): IS CL I, II, III, DIV 1, 2, GP A,B,C,D,E,F,G T4; CL I, zone 1, AEx ib IIC T4 CL II, zone 20
 Canada (CSA): Ex ia CL I,II,III, DIV 1, 2, GP A,B,C,D,E,F,G T4; zone 1, Ex ib IIC T4 zone 20 DIV 2: Ta = 50°C



Platform Selection										
Order no.	Dimensions (A x B)		Capacity		Readability		Cable length	Platform Height (mm)	Shipping Weight (lb.)	Price in USD
	(in.)	(mm)	(lb.)	(kg)	(lb.)	(kg)				
IFXS4-150GG-I	23.6 x 23.6	600 x 600	330	150	0.01	0.005	6 m	25	198	\$14,754
IFXS4-150IG-I	31.5 x 23.6	800 x 600						25	221	\$14,982
IFXS4-150II-I	31.5 x 31.5	800 x 800						25	243	\$15,194
IFXS4-150LG-I	39.4 x 23.6	1000 x 600						25	243	\$15,622
IFXS4-150LI-I	39.4 x 31.5	1000 x 800						25	265	\$16,073
IFXS4-150LL-I	39.4 x 39.4	1000 x 1000						25	375	\$16,718
IFXS4-150NL-I	49.2 x 39.4	1250 x 1000						25	397	\$17,288
IFXS4-150NN-I	49.2 x 49.2	1250 x 1250						25	481	\$17,925
IFXS4-150RN-I	59.1 x 49.2	1500 x 1250						25	547	\$18,531
IFXS4-150RR-I	59.1 x 59.1	1500 x 1500						35	628	\$19,140
IFXS4-150WR-I	78.7 x 59.1	2000 x 1500						35	739	\$19,755
IFXS4-300GG-I	23.6 x 23.6	600 x 600	660	300	0.02	0.01	6 m	25	198	\$14,754
IFXS4-300IG-I	31.5 x 23.6	800 x 600						25	221	\$14,982
IFXS4-300II-I	31.5 x 31.5	800 x 800						25	243	\$15,194
IFXS4-300LG-I	39.4 x 23.6	1000 x 600						25	243	\$15,622
IFXS4-300LI-I	39.4 x 31.5	1000 x 800						25	265	\$16,073
IFXS4-300LL-I	39.4 x 39.4	1000 x 1000						25	375	\$16,718
IFXS4-300NL-I	49.2 x 39.4	1250 x 1000						25	397	\$17,288
IFXS4-300NN-I	49.2 x 49.2	1250 x 1250						25	481	\$17,925
IFXS4-300RN-I	59.1 x 49.2	1500 x 1250						25	547	\$18,531
IFXS4-300RR-I	59.1 x 59.1	1500 x 1500						35	628	\$19,140
IFXS4-300WR-I	78.7 x 59.1	2000 x 1500						35	739	\$19,755
IFXS4-600GG-I	23.6 x 23.6	600 x 600	1320	600	0.05	0.02	6 m	25	198	\$14,754
IFXS4-600IG-I	31.5 x 23.6	800 x 600						25	221	\$14,982
IFXS4-600II-I	31.5 x 31.5	800 x 800						25	243	\$15,194
IFXS4-600LG-I	39.4 x 23.6	1000 x 600						25	243	\$15,622
IFXS4-600LI-I	39.4 x 31.5	1000 x 800						25	265	\$16,073
IFXS4-600LL-I	39.4 x 39.4	1000 x 1000						25	375	\$16,718
IFXS4-600NL-I	49.2 x 39.4	1250 x 1000						25	397	\$17,288
IFXS4-600NN-I	49.2 x 49.2	1250 x 1250						35	481	\$17,925
IFXS4-600RN-I	59.1 x 49.2	1500 x 1250						35	547	\$18,531
IFXS4-600RR-I	59.1 x 59.1	1500 x 1500						35	628	\$19,140
IFXS4-600WR-I	78.7 x 59.1	2000 x 1500						35	739	\$19,755

IFXS4 Flat-bed scales, Continued

USA (FM): IS CL I, II, III, DIV 1, 2, GP A,B,C,D,E,F,G T4; CL I, zone 1, AEx ib IIC T4 CL II, zone 20
 Canada (CSA): Ex ia CL I,II,III, DIV 1, 2, GP A,B,C,D,E,F,G T4; zone 1, Ex ib IIC T4 zone 20 DIV 2: Ta = 50°C



Platform Selection										
Order no.	Dimensions (L x W)		Capacity		Readability		Cable length	Platform Height (mm)	Shipping Weight (lb.)	Price in USD
	(in.)	(mm)	(lb.)	(kg)	(lb.)	(kg)				
IFXS4-1000GG-I	23.6 x 23.6	600 x 600	2200	1000	0.1	0.05	6 m	25	198	\$14,754
IFXS4-1000IG-I	31.5 x 23.6	800 x 600						25	221	\$14,982
IFXS4-1000II-I	31.5 x 31.5	800 x 800						25	243	\$15,194
IFXS4-1000LG-I	39.4 x 23.6	1000 x 600						25	243	\$15,622
IFXS4-1000LI-I	39.4 x 31.5	1000 x 800						25	265	\$16,073
IFXS4-1000LL-I	39.4 x 39.4	1000 x 1000						25	375	\$16,718
IFXS4-1000NL-I	49.2 x 39.4	1250 x 1000						25	397	\$17,288
IFXS4-1000NN-I	49.2 x 49.2	1250 x 1250						35	481	\$17,925
IFXS4-1000RN-I	59.1 x 49.2	1500 x 1250						35	547	\$18,531
IFXS4-1000RR-I	59.1 x 59.1	1500 x 1500						45	628	\$19,140
IFXS4-1000WR-I	78.7 x 59.1	2000 x 1500						45	739	\$19,755
IFXS4-1500II-I	31.5 x 31.5	800 x 800	3300	1500	0.10	0.05	6 m	25	243	\$15,194
IFXS4-1500LG-I	39.4 x 23.6	1000 x 600						25	243	\$15,622
IFXS4-1500LI-I	39.4 x 31.5	1000 x 800						35	265	\$16,073
IFXS4-1500LL-I	39.4 x 39.4	1000 x 1000						35	375	\$16,718
IFXS4-1500NL-I	49.2 x 39.4	1250 x 1000						35	397	\$17,288
IFXS4-1500NN-I	49.2 x 49.2	1250 x 1250						35	481	\$17,925
IFXS4-1500RN-I	59.1 x 49.2	1500 x 1250						35	547	\$18,531
IFXS4-1500RR-I	59.1 x 59.1	1500 x 1500						45	628	\$19,140
IFXS4-1500WR-I	78.7 x 59.1	2000 x 1500						45	739	\$19,755
IFXS4-3000LL-I	39.4 x 39.4	1000 x 1000	6600	3000	0.2	0.1	6 m	45	375	\$16,718
IFXS4-3000NL-I	49.2 x 39.4	1250 x 1000						45	397	\$17,288
IFXS4-3000NN-I	49.2 x 49.2	1250 x 1250						45	481	\$17,925
IFXS4-3000RN-I	59.1 x 49.2	1500 x 1250						45	547	\$18,531
IFXS4-3000RR-I	59.1 x 59.1	1500 x 1500						45	628	\$19,140
IFXS4-3000WR-I	78.7 x 59.1	2000 x 1500						45	739	\$19,755

IFXS4 Options															
		Dimensions (in.)													
		GG	IG	II	LG	LI	LL	NL	NN	RN	RR	WR			
		23.6 x 23.6	31.5 x 23.6	31.5 x 31.5	39.4 x 23.6	39.4 x 31.5	39.4 x 39.4	49.2 x 39.4	49.2 x 49.2	59.1 x 49.2	59.1 x 59.1	78.7 x 59.1	Price in USD		
Option	AISI 304, 2B cold-rolled steel, Electropolished, typ.Ra ≤ 0,8µ														
R6	For all weighing capacities:	•	•	•	•	•	•	•	•	•	•	•	\$1,676		
Option	AISI 316 Ti, 2B cold-rolled steel, Electropolished, typ.Ra ≤ 0,4µ														
R2	For all weighing capacities:	•											\$2,277		
			•										\$2,277		
				•										\$2,277	
					•									\$2,277	
						•								\$2,277	
							•							\$2,277	
								•						\$2,561	
									•						\$2,775
										•					\$2,993
									•				\$3,205		
										•			\$3,890		
Option	Lifting devices														
T7	Retractable Wheels		•*	•*	•	•	•	•	•	•	•	•	\$2,579		
T16	Lifting mechanism acc. to NIOSH(< 40lbs lifting force, 1 person) *3		•	•	•	•	•	•	•	•	•	•	\$3,440		
										•	•		\$10,535		
T17	Option T16 with T17 includes 2nd ramp for drive through operation *3		•	•	•	•	•	•	•				\$5,791		
T10	Lifting mechanism (for more than 1 person, retrofittable) *3			•	•	•	•	•	•				\$1,904		
T11	Option T10, incl. 2nd ramp (drive-through) *3			•	•	•	•	•	•				\$3,898		
3	Option cannot be selected for models with 30,000 d resolution	• Retractable wheels on IG and II platforms are only available on units up to 600 kg capacity													

Options: IFXS4 Flat-bed scales, stainless steel

		GG	IG	II	LG	LI	LL	NL	NN	RN	RR	WR	
		23.6 x 23.6	31.5 x 23.6	31.5 x 31.5	39.4 x 23.6	39.4 x 31.5	39.4 x 39.4	49.2 x 39.4	49.2 x 49.2	59.1 x 49.2	59.1 x 59.1	78.7 x 59.1	Price in USD
Option	Others												
L6	IP69K - Kit	•	•	•	•	•	•	•	•	•	•	•	\$1,022
Note: not available for 150 kg models (150 kg = IP68)													
T4	Stop bar	•	•	•	•	•	•	•	•	•	•	•	\$541
T9	Bottom plate	•	•	•	•	•	•	•	•	•	•	•	\$2,475
T5	Towing bar (incl. stop bar)		•	•	•	•	•	•	•	•	•		\$1,106
T6	2 x handles, 2 x rollers	•	•	•	•	•	•						\$1,106
T13	4 handles (2 on front side, 2 on back side)	•	•	•	•	•	•	•	•	•	•	•	\$552
T14	Integrated Column		•*1	•*1	•	•	•	•	•*2	•*2	•*2		\$1,941
T15	2nd ramp (drive-through)	•	•	•	•	•	•	•	•	•	•	•	\$1,697
	Stainless steel cable shroud												On Request

IFXS4 Options, Continued													
		GG	IG	II	LG	LI	LL	NL	NN	RN	RR	WR	
		23.6 x 23.6	31.5 x 23.6	31.5 x 31.5	39.4 x 23.6	39.4 x 31.5	39.4 x 39.4	49.2 x 39.4	49.2 x 49.2	59.1 x 49.2	59.1 x 59.1	78.7 x 59.1	Price in USD
Option	Certificates												
Z1	Certificate of surface roughness	\$260
Z2	Certificate material	\$260
Z3	Test report / Certificate	\$260

*1 for sizes IG + II, T14 in conjunction with T7 requires the modification of adding the T14 to the T4 (stop bar).
 Contact factory for pricing

*2 T5 recommended in conjunction with T7

IF Platforms Possible Combinations

Option	T4	T5	T6	T7	T9	T10	T11	T13	T14	T15	T16	T17
T4	-		x	x	x	x		x	x		x	
T5		-		x	x				x			
T6	x		-		x				x			
T7	x	x		-	x				x*	x		
T9	x	x	x	x	-	x	x	x	x	x	x	x
T10	x				x	-						
T11					x		-					
T13	x				x			-	x			
T14	x	x	x	x*	x			x	-	x		
T15				x	x				x	-		
T16	x				x						-	
T17					x							-

X	Combination possible
*	no combination possible for sizes IG + II

Signum Ex Higher Resolution EX Rated Scales



Signum Ex Supreme		
Order Number	Description	Price in USD
SIWXSBBP-V49**	Signum® Ex Supreme Complete Scale- HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232 Interface (14 Pin Round Socket); Painted Platform and SS load plate size Ø 4.5 inch (115 mm) Capacity 1.3 lb. x 0.00002 lb. (0,62kg x 0.001g) readability; IP43 Ingress Protection; Built In Calibration weight; FM Approved for Class I, Division 1, Groups A, B, C and D (Old Version SIWXSBBP-3-06-H-A11-E7)	\$6,726
SIWXSBBP-V50	Signum® Ex Supreme Complete Scale- HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232 Interface (14 Pin Round Socket); Painted Platform with SS load plate size 7.1 inch x 7.1 inch (182 x 182mm)Capacity 6.8 lb. x 0.0002 lb. (3.1kg x 0.01g) readability; IP65 Ingress Protection; Built In Calibration weight; USA (FM): IS CL I, II, III, DIV 1 GP A,B,C,D,E,F,G T4 ; Canada (CSA): Ex ia CL I, II, III, DIV 1 GP A,B,C,D,E,F,G T4 ; (Old Version SIWXSBBP-3-3-H-A11-E7)	\$4,951
SIWXSBBP-V51	Signum® Ex Supreme Smaller Complete Scale- HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232 Interface (14 Pin Round Socket); Painted Platform and SS load plate size 7.1 inch x 7.1 inch (182 x 182mm)Capacity 13.5 lb. x 0.0002 lb. (6.1kg x 0.01g) readability; IP65 Ingress Protection; Built In Calibration weight; USA (FM): IS CL I, II, III, DIV 1 GP A,B,C,D,E,F,G T4 ; Canada (CSA): Ex ia CL I, II, III, DIV 1 GP A,B,C,D,E,F,G T4 ; (Old Version SIWXSBBP-3-6-H-A11-E7)	\$6,017
SIWXSDCP-V54	Signum ® Ex supreme Complete Scale- HMI with 28-buttons keyboard, 14-segments display plus application symbols product data memory, identifiers (4x40 characters), RS-232 Interface (14 Pin Round Socket); SS load Plate and Painted platform size of 13.7 inch x 9.7 inch (350 x 240mm); Capacity 75 lb x 0.0002 lb. (35kg x 0.1g) readability; IP65 Ingress Protection; Built In Calibration Weight; USA (FM): IS CL I, II, III, DIV 1 GP A,B,C,D,E,F,G T4; Canada (CSA): Ex ia CL I, II, III, DIV 1 GP A,B,C,D,E,F,G T4; (Old Version SIWXSDCS-3-35-H-A11-E7-IP65)	\$6,578
SIWXSBBBS-V52	Signum® Ex Supreme Stainless Steel Complete Scale- HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232 Interface (14 Pin Round Socket); SS Platform Base and SS load plate of 7.1 inch x 7.1 inch (182 x 182mm); Capacity 6.8 lb. x 0.0002 lb. (3.1kg x 0.01g) readability; IP65 Ingress Protection; Built In Calibration weight; USA (FM): IS CL I, II, III, DIV 1 GP A,B,C,D,E,F,G T4 ; Canada (CSA): Ex ia CL I, II, III, DIV 1 GP A,B,C,D,E,F,G T4 ; (Old Version SIWXSBBBS-3-3-H-A11-E7)	\$7,240
SIWXSBBBS-V53	Signum® Ex Supreme Stainless Steel Complete Scale- HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS232 Interface (14 Pin Round Socket); SS Platform Base and SS load plate of 7.1 inch x 7.1 inch (182 x 182mm); Capacity 13.5 lb. x 0.0002 lb. (6.1kg x 0.01g) readability; IP65 Ingress Protection; Built In Calibration weight; USA (FM): IS CL I, II, III, DIV 1 GP A,B,C,D,E,F,G T4 ; Canada (CSA): Ex ia CL I, II, III, DIV 1 GP A,B,C,D,E,F,G T4 ; (Old Version SIWXSBBBS-3-3-H-A11-E7)	\$8,306
SIWXSDCS-V55	Signum ® Ex supreme Complete Stainless Steel Scale- HMI with 28-buttons keyboard, 14-segments display plus application symbols, product data memory, identifiers (4x40 characters), RS-232 Interface (14 Pin Round Socket); SS load plate and SS Platform size of 14.5 inch x 10.25 inch (370 x 260mm); Capacity 75 lb x 0.0002 lb. (35kg x 0.1g) readability; IP65 Ingress Protection; Built In Calibration Weight; USA (FM): IS CL I, II, III, DIV 1 GP A,B,C,D,E,F,G T4; Canada (CSA): Ex ia CL I, II, III, DIV 1 GP A,B,C,D,E,F,G T4; (Old Version SIWXSDCS-3-35-H-A11-E7-IP65)	\$7,857
<p>* Stainless Steel Weighing Pan</p> <ul style="list-style-type: none"> • Monolithic weighing system • Overload protection 300 kg • For US applications - Requires single YPS02-XUR for hazardous area connection or YPS02-ZKR for safe area connection <p>USA (FM): IS CL I, II, III, DIV 1 GP A,B,C,D,E,F,G T4 ; CL I, zone 1 AEx ib IIC T4 / CL II, zone 21 (only IP6X models) Canada (CSA): Ex ia CL I, II, III, DIV 1 GP A,B,C,D,E,F,G T4 ; Zone 1, Ex ib IIC T4 / zone 21 (only IP6X models)</p> <p>**SIWXSBBP-V49 (Class I, Division 1, Groups A, B, C and D)</p>		

Accessories Signum EX Painted

Columns for model DCP- Aluminum for attaching indicator to platform

Order no.	Description	List Price USD
YDH01P	Display column for series for models CASE-SPC*, SIW*DCP*, ISDCP* column height 500 mm	\$674

Columns for model BBP- Aluminum for attaching indicator to platform

Order no.	Description	List Price USD
YDH02P	Display column for series for models CASLE-SPC*, SIW*BBP*, ISBBP* column height 400 mm	\$721

Accessories Signum EX Stainless Steel

Columns for model DCS- Stainless Steel for attaching indicator to platform

Order no.	Description	List Price USD
YDH01CWS	Column, stainless steel, for attaching indicator to platform for 320x240(DC) Platform, height 330 mm	\$653

Columns for model BBS- Stainless Steel for attaching indicator to platform

Order no.	Description	List Price USD
YDH02S	Columns for model BBS, stainless steel, for attaching indicator to platform Column height 400 mm	\$810

Accessories Signum EX All

Power Supplies

Order no.	Description	List Price USD
YPS02-XUR	Power supplies for installation in hazardous areas USA can be installed in zone 1, 21 resp. DIV 1,	\$2,298
YPS02-ZKR	Power supplies for installation in safe area USA / Canada ATEX: II (2) G [EEx ib] IIC (65 feet of Intrinsically Safe Cable)	\$1,595
YRB02-X	Rechargeable battery pack in hazardous areas, Nonincendive Class I, II, III, Division 2, Groups A, B, C, D, E, F and G. Temperature Code T4 -20°C ≤ Ta ≤ +40°C hazardous (classified) locations for indoor use only. (charger has to be ordered separately YRB02LD)	\$1,815
YRB02-LD	Battery charger for YRB02-X rechargeable battery pack (for use only outside the hazardous area)	\$334

Mechanical Accessories

Order no.	Description	List Price USD
YDH02CISUS	Bracket for indicator; wall mounting, tiltable, stainless steel	\$120

Zener Barriers and Cables

Order no.	Description	List Price USD
YDI05-ZU2	Hazardous area Converter RS-232/RS485 Input - RS232/RS485 Output (A24) incl. 14 pin male connector with 20m cable (M52)	\$1,211
YDI05-ZU3	Hazardous area converter RS-422 Input - RS-232 Output (A25) with Cable Gland for Custom Cable(M50)	\$1,152
YCC422-X	Cable without connectors, 1m (3.28 ft.), LiY6x(2x0.14C)Y, blue sheath, recommended e.g., for RS-422 interface, digital IN, 1 m = 1 piece.	\$18
YCC485-X	Cable without connectors, 1m (3.28 ft.) 2x0.22 LiYCY, blue sheath, recommended, e.g., for RS-485 interface, 1 m = 1 piece.	\$18

Novego® PR6261 Hygienic Weighing System



- Load Cells OIML R60, Accuracy Class C3 = 0.015%
- Capacity from 125kg up to 2t
- Material stainless steel 1.4418
- Also available digitally with the Connexx converter
- High degree of process reliability and precision thanks to shear-force-resistant system
- Quick and easy commissioning due to smart add-on pair
- Hygienic weighing module ensures efficient cleaning
- Ex-Version available
- IP68/ IP69



Weighing module incl. load cell, Accuracy C3 = 0.015%

Type	Order Number	Description	Signal	Height (mm)	Price in USD
9405 261 03112	Novego 125 kg C3	PR 6261/125 kg C3 Hygienic weighing module 125 kg	2mV/V	42.0	\$ 1,473
9405 261 03125	Novego 250 kg C3	PR 6261/250 kg C3 Hygienic weighing module 250 kg	2mV/V	42.0	\$ 1,473
9405 261 03150	Novego 500 kg C3	PR 6261/500 kg C3 Hygienic weighing module 500 kg	2mV/V	42.0	\$ 1,473
9405 261 03210	Novego 1 t C3	PR 6261/1 t C3 Hygienic weighing module 1 t	2mV/V	42.0	\$ 1,473
9405 261 03220	Novego 2 t C3	PR 6261/2 t C3 Hygienic weighing module 2 t	2mV/V	42.0	\$ 1,617

Weighing module incl. load cell, Accuracy C3 = 0.015%, Ex-Version

Type	Order Number	Description	Signal	Height (mm)	Price in USD
9405 661 03112	Novego 125 kg C3E	PR 6261/125 kg C3E Hygienic weighing module 125 kg, Ex-Version	2mV/V	42.0	\$ 1,813
9405 661 03125	Novego 250 kg C3E	PR 6261/250 kg C3E Hygienic weighing module 250 kg, Ex-Version	2mV/V	42.0	\$ 1,813
9405 661 03150	Novego 500 kg C3E	PR 6261/500 kg C3E Hygienic weighing module 500 kg, Ex-Version	2mV/V	42.0	\$ 1,813
9405 661 03210	Novego 1 t C3E	PR 6261/1 t C3E Hygienic weighing module 1 t, Ex-Version	2mV/V	42.0	\$ 1,813
9405 661 03220	Novego 2 t C3E	PR 6261/2 t C3E Hygienic weighing module 2 t, Ex-Version	2mV/V	42.0	\$ 1,959

Novego® - Accessories

Type	Order Number	Description	Height (mm)	Price in USD
9405 360 61002	Novego /00S	PR 6061/00S Adapter plate with threaded bolts	19 mm	\$ 174
9405 360 61012	Novego /01S	PR 6061/01S Adapter plate with built-in height adjuster (up to 8cm)	251 mm to 331 mm	\$ 632
9405 360 61022	Novego /02S	PR 6061/02S Pivoting base for rack mounting	50 mm	\$ 464
9405 360 61032	Novego /03S	PR 6061/03S Pivoting base for floor mounting	50 mm	\$ 484
9405 360 61042	Novego /04S	PR 6061/04S Pivoting base for floor mounting with built-in tilt correction	50 mm	\$ 661
9405 360 61052	Novego /05S	PR 6061/05S Shim set		\$ 105
9405 360 61062	Novego /06S	PR 6061/06S Transport and assembling kit		\$ 122
9405 360 61072	Novego /07S	PR 6061/07S Pivot		\$ 303



Inteco® - Compression Type Load Cell (incl. Bottom Disc)



- Nominal capacity range from 500 kg to 75 t
- Resistant against vibrations
- Wide temperature range
- Stainless steel housing & measuring element
- Ex-version available
- IP68, IP69
- Advanced operating temperature and coatings on request
- **Higher Accuracy Classes Available**



Load Cells OIML R60, Accuracy Class D1 = 0.04%

Order Number	Type	Description	Signal	Height	Cable	Price USD
9405 203 01150	PR 6203/500 kg D1	Minebea Intec Inteco ® PR 6203/500 kg D1 Compression Load Cell 500 kg	2mV/V	138.5	5m	\$1,579
9405 203 01210	PR 6203/1tD1	Minebea Intec Inteco ® PR 6203/1tD1 Compression Load Cell 1 t	2mV/V	138.5	5m	\$1,579
9405 203 01220	PR 6203/2tD1	Minebea Intec Inteco ® PR 6203/2tD1 Compression Load Cell 2 t	2mV/V	138.5	5m	\$1,579
9405 203 01230	PR 6203/3tD1	Minebea Intec Inteco ® PR 6203/3tD1 Compression Load Cell 3 t	2mV/V	138.5	5m	\$1,579
9405 203 01250	PR 6203/5tD1	Minebea Intec Inteco ® PR 6203/5tD1 Compression Load Cell 5 t	2mV/V	138.5	5m	\$1,666
9405 203 01310	PR 6203/10tD1	Minebea Intec Inteco ® PR 6203/10tD1 Compression Load Cell 10 t	2mV/V	138.5	5m	\$1,666
9405 203 01320	PR 6203/20tD1	Minebea Intec Inteco ® PR 6203/20tD1 Compression Load Cell 20 t	2mV/V	138.5	12m	\$1,792
9405 203 01330	PR 6203/30tD1	Minebea Intec Inteco ® PR 6203/30tD1 Compression Load Cell 30 t	2mV/V	138.5	12m	\$1,932
9405 203 01350	PR 6203/50tD1	Minebea Intec Inteco ® PR 6203/50tD1 Compression Load Cell 50 t	2mV/V	138.5	12m	\$2,259
9405 203 01360	PR 6203/60tD1	Minebea Intec Inteco ® PR 6203/60tD1 Compression Load Cell 60 t	2mV/V	138.5	12m	\$2,374
9405 203 01375	PR 6203/75tD1	Minebea Intec Inteco ® PR 6203/75tD1 Compression Load Cell 75 t	2mV/V	138.5	12m	\$2,493

Precision Load Cells OIML R60, Accuracy Class C3 = 0.015%

Order Number	Type	Description	Signal	Height	Cable	Price USD
9405 203 03220	PR 6203/2tC3	Minebea Intec Inteco ® PR 6203/2tC3 Compression Load Cell 2 t	2mV/V	138.5	5m	\$2,249
9405 203 03230	PR 6203/3tC3	Minebea Intec Inteco ® PR 6203/3tC3 Compression Load Cell 3 t	2mV/V	138.5	5m	\$2,249
9405 203 03250	PR 6203/5tC3	Minebea Intec Inteco ® PR 6203/5tC3 Compression Load Cell 5 t	2mV/V	138.5	5m	\$2,375
9405 203 03310	PR 6203/10tC3	Minebea Intec Inteco ® PR 6203/10tC3 Compression Load Cell 10 t	2mV/V	138.5	5m	\$2,475
9405 203 03320	PR 6203/20tC3	Minebea Intec Inteco ® PR 6203/20tC3 Compression Load Cell 20 t	2mV/V	138.5	12m	\$2,599
9405 203 03330	PR 6203/30tC3	Minebea Intec Inteco ® PR 6203/30tC3 Compression Load Cell 30 t	2mV/V	138.5	12m	\$2,725
9405 203 03350	PR 6203/50tC3	Minebea Intec Inteco ® PR 6203/50tC3 Compression Load Cell 50 t	2mV/V	138.5	12m	\$3,003
9405 203 03360	PR 6203/60tC3	Minebea Intec Inteco ® PR 6203/60tC3 Compression Load Cell 60 t	2mV/V	138.5	12m	\$3,117
9405 203 03375	PR 6203/75tC3	Minebea Intec Inteco ® PR 6203/75tC3 Compression Load Cell 75 t	2mV/V	138.5	12m	\$3,236

Precision Load Cells OIML R60, Accuracy Class C6 = 0.008%

Order Number	Type	Description	Signal	Height	Cable	Price USD
9405 203 06230	PR 6203/3tC6	Minebea Intec Inteco ® PR 6203/3tC6 Compression Load Cell 3 t	2mV/V	138.5	5m	\$2,917
9405 203 06250	PR 6203/5tC6	Minebea Intec Inteco ® PR 6203/5tC6 Compression Load Cell 5 t	2mV/V	138.5	5m	\$3,044
9405 203 06310	PR 6203/10tC6	Minebea Intec Inteco ® PR 6203/10tC6 Compression Load Cell 10 t	2mV/V	138.5	5m	\$3,143
9405 203 06320	PR 6203/20tC6	Minebea Intec Inteco ® PR 6203/20tC6 Compression Load Cell 20 t	2mV/V	138.5	12m	\$3,270
9405 203 06330	PR 6203/30tC6	Minebea Intec Inteco ® PR 6203/30tC6 Compression Load Cell 30 t	2mV/V	138.5	12m	\$3,394
9405 203 06350	PR 6203/50tC6	Minebea Intec Inteco ® PR 6203/50tC6 Compression Load Cell 50 t	2mV/V	138.5	12m	\$3,674
9405 203 06360	PR 6203/60tC6	Minebea Intec Inteco ® PR 6203/60tC6 Compression Load Cell 60 t	2mV/V	138.5	12m	\$3,786
9405 203 06375	PR 6203/75tC6	Minebea Intec Inteco ® PR 6203/75tC6 Compression Load Cell 75 t	2mV/V	138.5	12m	\$3,906

Load cell Inteco®, Converter Connexx®

Order Number	Type	Description	Price USD
9405 103 00000	Converter Connexx®	Converter Connexx for Inteco	\$388

Mounting kits and accessories for Inteco® see PR 6201

Inteco®, Converter Connexx® - Applications sets

Order Number	Type	Description	Price USD
9405 361 54031	PR 6154/03	Application set for 3 load cells. Including: 2x PR 6155/05, 1x PR 6152/25, 1x PR 6153/99	\$432
9405 361 54041	PR 6154/04	Application set for 4 load cells. Including: 3x PR 6155/05, 1x PR 6152/25, 1x PR 6153/99	\$516

Inteco®, Converter Connexx® - Accessories

Order Number	Type	Description	Price USD
9405 361 52101	PR 6152/10	PR 6152/10 Connection cable between Connexx and X3 (10 m)	\$133
9405 361 52251	PR 6152/25	PR 6152/25 Connection cable between Connexx and X3 (25 m)	\$239
9405 361 52401	PR 6152/40	PR 6152/40 Connection cable between Connexx and X3 (40 m)	\$333
9405 361 53981	PR 6153/98	PR 6153/98 Split cable gland	\$29
9405 361 53991	PR 6153/99	PR 6153/99 Terminal resistor for Connexx, M12	\$29
9405 361 55051	PR 6155/05	PR 6155/05 Connection cable between Connexx and Connexx (5 m)	\$82
9405 361 55101	PR 6155/10	PR 6155/10 Connection cable between Connexx and Connexx (10 m)	\$107

PR 6201 - Precision Compression Load Cell (incl. Bottom Disc)

- Nominal capacity range from 100t to 520t
- Resistant against vibrations
- Highest destructive loads
- Wide temperature range
- Stainless steel housing
- IP68, IP69
- Advanced operating temperature and painting on request
- **Ex-version available**



Load Cells, Accuracy Class L = 0.5%

Order Number	Type	kg	lb.	mm	inches	m	ft.	Signal	Weight lb.	USD
9405 262 01159	PR6201/15L	100,000	220,459	200	7.87	12	39	1mV/V		\$3,141
9405 262 01559	PR6201/520tL	520,000	1,146,387	358	14.09	12	39	2.6mV/V		\$10,469

High Capacity Load Cells, Accuracy Class N = 0.06%

Order Number	Type	kg	lb.	mm	inches	m	ft.	Signal	Weight lb.	USD
9405 262 01151	PR6201/15N	100,000	220,459	200	7.87	12	39	1mV/V	28.4	\$3,502
9405 262 01251	PR6201/25N	200,000	440,917	270	10.63	12	39	1mV/V	63.9	\$6,489
9405 262 01351	PR6201/35N	300,000	661,376	270	10.63	12	39	1mV/V	63.9	\$8,665

Load Cells with Analogue Output (4-20mA), Accuracy Class L = 0.25% (100t+200t L = 0.5%)

Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 562 01529	PR6201/52LA	500	1,102	138.5	5.45	5	16	4-20mA	6.2	\$2,338
9405 562 01139	PR6201/13LA	1,000	2,205	138.5	5.45	5	16	4-20mA	6.2	\$2,338
9405 562 01239	PR6201/23LA	2,000	4,409	138.5	5.45	5	16	4-20mA	6.2	\$2,338
9405 562 01339	PR6201/33LA	3,000	6,614	138.5	5.45	5	16	4-20mA	6.2	\$2,338
9405 562 01539	PR6201/53LA	5,000	11,023	138.5	5.45	5	16	4-20mA	6.2	\$2,366
9405 562 01149	PR6201/14LA	10,000	22,046	138.5	5.45	5	16	4-20mA	6.2	\$2,366
9405 562 01249	PR6201/24LA	20,000	44,092	138.5	5.45	12	39	4-20mA	11.2	\$2,431
9405 562 01349	PR6201/34LA	30,000	66,138	138.5	5.45	12	39	4-20mA	11.2	\$2,959
9405 562 01549	PR6201/54LA	50,000	110,229	138.5	5.45	12	39	4-20mA	11.2	\$3,055
9405 562 01159	PR6201/15LA	100,000	220,459	200	7.87	12	39	4-20mA	28.4	\$4,044
9405 562 01259	PR6201/25LA	200,000	440,917	270	10.63	12	39	4-20mA	63.9	\$7,657

- Duplicated pair of strain gauges with two adjustment chambers
- Resistant against vibrations and high temperatures
- High overload capacities
- Ex-version available
- IP68, IP69



Dual Bridge Compression Load Cell, Accuracy Class N = 0.06%

Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 262 01155	PR6201/15NDB	100,000	220,459	200	7.87	12	39	1mV/V	28.4	\$5,551
9405 262 01255	PR6201/25NDB	200,000	440,917	270	10.63	12	39	1mV/V	63.9	\$8,226
9405 262 01355	PR6201/35NDB	300,000	661,376	270	10.63	12	39	1.5mV/V	63.9	\$10,466
9405 262 01555	PR6201/520tLDB	500,000	1,146,387	358	14.09	12	39	2.6mV/V	63.9	\$12,175



PR6001 Mounting Kits

500kg to 10,000kg (1,100lb to 22,000lb)

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 360 01001	PR6001/00N	PR6001/00N Universal vessel foot, mounting kit for Inteco, 500kg...10 t	N/A	>20	191	7.5	Steel zinc	22.9	\$481
9405 360 01002	PR6001/00S	PR6001/00S Universal vessel foot, mounting kit for Inteco, 500kg...10t, stainless steel	N/A	>20	191	7.5	Stainless Stl	24.7	\$915
9405 360 01101	PR6001/10N	PR6001/10N MaxiFlexlock, mounting kit for Inteco, 500 kg...10 t, 25 kN	25	>45	191	7.5	Steel zinc	36.4	\$1,044
9405 360 01102	PR6001/10S	PR6001/10S MaxiFlexlock, mounting kit for Inteco, 500 kg...10 t, 25 kN, stainless steel	25	>39	191	7.5	Stainless Stl	38.1	\$1,677
9405 360 01201	PR6001/20N	PR6001/20N MaxiFlexlock, mounting kit for Inteco, 500 kg...10 t, 50 kN	50	>100	191	7.5	Steel Zinc	56.4	\$1,575
9405 360 01202	PR6001/20S	PR6001/20S MaxiFlexlock, mounting kit for Inteco, 500 kg...10 t, 50 kN, stainless steel	50	>100	191	7.5	Stainless Stl	58.2	\$3,100
9405 360 01301	PR6001/30N	PR6001/30N High Capacity Mounting Kit for Inteco, 500 kg...10 t, 200 kN	200	>236	250.5	9.9	Steel Zinc	315.3	\$4,507

20,000kg to 50,000kg (44,000lb to 110,000lb)									
Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 360 01011	PR6001/01N	PR6001/01N Universal vessel foot, mounting kit for Inteco, 20 t ... 75 t	N/A	>20	191	7.5	Steel Zinc	22.9	\$481
9405 360 01012	PR6001/01S	PR6001/01S Universal vessel foot, mounting kit for Inteco, 20 t ... 75 t, stainless steel	N/A	>20	191	7.5	Stainless Stl	24.7	\$915
9405 360 01111	PR6001/11N	PR6001/11N MaxiFlexlock, mounting kit for Inteco, 20 t...75 t, 25 kN	25	>45	191	7.5	Steel Zinc	36.4	\$1,044
9405 360 01112	PR6001/11S	PR6001/11S MaxiFlexlock, mounting kit for Inteco, 20 t...75 t, 25 kN, stainless steel	25	>39	191	7.5	Stainless Stl	38.1	\$1,677
9405 360 01211	PR6001/21N	PR6001/21N MaxiFlexlock, mounting kit for Inteco, 20 t...75 t, 50 kN	50	>100	191	7.5	Steel Zinc	56.4	\$1,575
9405 360 01212	PR6001/21S	PR6001/21S MaxiFlexlock, mounting kit for Inteco, 20 t...75 t, 50 kN, stainless steel	50	>100	191	7.5	Stainless Stl	58.2	\$3,100
9405 360 01261	PR6001/26N	PR6001/26N MaxiFlexlock, mounting kit for Inteco, 20 t ... 75 t, 50 kN, 2 integrated lift-off protection 180kN each	50	>100	250.5	9.9	Steel Zinc	167.6	\$2,724
9405 360 01311	PR6001/31N	PR6001/31N High Capacity Mounting Kit for Inteco, 20 t...75 t, 200 kN	200	>236	250.5	9.9	Steel Zinc	315.3	\$4,507

Welding plates for 500kg to 50,000kg (1,100lb to 110,000lb)									
9405 360 01901	PR6001/90N	PR6001/90N Welding Plates for PR 6001/00N and PR 6001/01N			30	1.18	Steel, Zinc	21.6	\$168
9405 360 01902	PR6001/90S	PR6001/90S Welding Plates for PR 6001/00S and PR 6001/01S			30	1.18	Stainless Stl	21.6	\$485
9405 360 01911	PR6001/91N	PR6001/91N Welding Plates for PR 6001/10N and PR 6001/11N			30	1.18	Steel, Zinc	30.6	\$419
9405 360 01912	PR6001/91S	PR6001/91S Welding Plates for PR 6001/10S and PR 6001/11S			30	1.18	Stainless Stl	30.6	\$678
9405 360 01921	PR6001/92N	PR6001/92N Welding Plates for PR 6001/20N and PR 6001/21N			30	1.18	Steel, Zinc	49.8	\$572
9405 360 01922	PR6001/92S	PR6001/92S Welding Plates for PR 6001/20S and PR 6001/21S			30	1.18	Stainless Stl	49.8	\$1,095

100,000kg (220,000lb)									
9405 360 01021	PR6001/02N	PR6001/02N Universal vessel foot, mounting kit for PR 6201, 100 t	N/A	>28	290	11.4	Steel Zinc	60.6	\$701
9405 360 01321	PR6001/32N	PR6001/32N High Capacity Mounting Kit for PR 6201, 100 t, 200 kN	200	>236	350	13.8	Steel Zinc	436.5	\$5,633
9405 360 01961	PR6001/96N	PR6001/96N Welding Plates for PR 6001/02N	N/A	N/A	2 x 30	1.18	Steel Zinc	49.8	\$572

200,000kg to 300,000kg (440,000lb to 660,000lb)									
9405 360 01031	PR6001/03N	PR6001/03N Universal vessel foot, mounting kit for PR 6201, 200t...300t	N/A	>28	385	15.2	Steel Zinc	132.3	\$1,072
9405 360 01331	PR6001/33N	PR6001/33N High Capacity Mounting Kit for PR 6201, 200 t...300 t, 200 kN	200	>236	445	17.5	Steel Zinc	606.3	\$6,198
9405 360 01981	PR6001/98N	PR6001/98N Welding Plates for PR 6001/03N	N/A	N/A	2 x 30	2 x 1.18	Steel Zinc	108.0	\$781



Seismic Mounts									
Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 361 44541	PR6144/54N	PR6144/54N Seismic Mount for Inteco/500kg...75t, 370 kN	370	>600	217	8.5	Steel Zinc	289.0	\$6,307
9405 361 44151	PR6144/15N	PR6144/15N Seismic Mount for PR 6201/100t, 440 kN	440	>800	298	11.7	Steel Zinc	440.9	\$6,605
9405 361 44351	PR6144/35N	PR6144/35N Seismic Mount for PR 6201/200t...300t, 520 kN	520	>1200	387	15.2	Steel Zinc	723.1	\$7,859
9405 361 44551	PR6144/55N	PR6144/55N Seismic Mount for PR 6201/520t, 520 kN	520	>1200	428	16.9	Steel Zinc	802.5	\$8,668

PR 6221 - Weighbridge Load Cell



- Nominal capacity range from 20t to 75t
- High overload capacities
- Highest reliability
- Also available digitally with the Connexx converter
- No corner adjustment necessary, Maintenance free
- Ex-version available
- IP68, IP69
- Accuracy class C5 or C6 on request



Weighbridge Load Cells OIML R60 Class C3 = 0.015% * Special Cable Lengths Available upon Request

Order Number	Description	Height	Signal	Price in USD
9405 221 10320	Kit PR6221/20tC3 F - Weighbridge Load Cell 20 t Standard Home Run Cable 15ft long	118.5	1mV/V	\$ 1,640
9405 221 10325	Kit PR6221/25tC3 F - Weighbridge Load Cell 25 t Standard Home Run Cable 15ft long	118.5	2mV/V	\$ 1,726
9405 221 11325	Kit PR6221/25tC3 F - Weighbridge Load Cell 25 t Armored Home Run Cable 10ft long	118.5	2mV/V	\$ 1,861
9405 221 12325	Kit PR6221/25tC3 F - Weighbridge Load Cell 25 t Armored Home Run Cable 15ft long	118.5	2mV/V	\$ 1,918
9405 221 15325	Kit PR6221/25tC3 F - Weighbridge Load Cell 25 t Armored Home Run Cable 35ft long	118.5	2mV/V	\$ 1,996
9405 221 12330	Kit PR6221/30tC3 F - Weighbridge Load Cell 30 t Armored Home Run Cable 15ft long	118.5	1mV/V	\$ 2,019
9405 221 16330	Kit PR6221/30tC3 F - Weighbridge Load Cell 30 t Armored Home Run Cable 85ft long	118.5	1mV/V	\$ 2,363
9405 221 17330	Kit PR6221/30tC3 F - Weighbridge Load Cell 30 t Armored Home Run Cable 100ft long	118.5	1mV/V	\$ 2,423
9405 221 12350	Kit PR6221/50tC3 F - Weighbridge Load Cell 50 t Armored Home Run Cable 15ft long	118.5	2mV/V	\$ 2,160
9405 221 13350	Kit PR6221/50tC3 F - Weighbridge Load Cell 50 t Armored Home Run Cable 20ft long	118.5	2mV/V	\$ 2,221

Weighbridge Load Cells OIML R60 Class C3 = 0.015%

Order Number	Type	Description	Signal	Height	Cable	Price in USD
9405 221 03312	PR 6221/12,5tC3	PR 6221/12,5t C3 Weighbridge Load Cell 12,5 t	1mV/V	118.5	16m	\$ 1,843
9405 221 03320	PR 6221/20tC3	PR 6221/20tC3 Weighbridge Load Cell 20 t	1mV/V	118.5	16m	\$ 1,920
9405 221 03325	PR 6221/25tC3	PR 6221/25tC3 Weighbridge Load Cell 25 t	2mV/V	118.5	16m	\$ 2,023
9405 221 03330	PR 6221/30tC3	PR 6221/30tC3 Weighbridge Load Cell 30 t	1mV/V	118.5	16m	\$ 2,123
9405 221 03350	PR 6221/50tC3	PR 6221/50tC3 Weighbridge Load Cell 50 t	2mV/V	118.5	16m	\$ 2,274
9405 221 03360	PR 6221/60tC3	PR 6221/60tC3 Weighbridge Load Cell 60 t	2,4mV/V	118.5	16m	\$ 2,563
9405 221 03375	PR 6221/75tC3	PR 6221/75tC3 Weighbridge Load Cell 75 t	3mV/V	118.5	16m	\$ 2,678

Weighbridge Load Cells OIML R60 Class C3 = 0.015%, Ex-Version

Order Number	Type	Description	Signal	Height	Cable	Price in USD
9405 621 03312	PR 6221/12,5tC3E	PR 6221/12,5t C3E Weighbridge Load Cell 12,5 t 3000d Ex-vers.	1mV/V	118.5	20m	\$ 2,540
9405 621 03320	PR 6221/20tC3E	PR 6221/20tC3E Weighbridge Load Cell 20 t 3000d Ex-vers.	1mV/V	118.5	20m	\$ 2,639
9405 621 03325	PR 6221/25tC3E	PR 6221/25tC3E Weighbridge Load Cell 25 t 3000d Ex-vers.	2mV/V	118.5	20m	\$ 2,744
9405 621 03330	PR 6221/30tC3E	PR 6221/30tC3E Weighbridge Load Cell 30 t 3000d Ex-vers.	1mV/V	118.5	20m	\$ 2,845
9405 621 03350	PR 6221/50tC3E	PR 6221/50tC3E Weighbridge Load Cell 50 t 3000d Ex-vers.	2mV/V	118.5	20m	\$ 3,000
9405 621 03360	PR 6221/60tC3E	PR 6221/60tC3E Weighbridge Load Cell 60 t 3000d Ex-vers.	2.4mV/V	118.5	20m	\$ 3,051
9405 621 03375	PR 6221/75tC3E	PR 6221/75tC3E Weighbridge Load Cell 75 t 3000d Ex-vers.	3mV/V	118.5	20m	\$ 3,157

Weighbridge Load Cells OIML R60 Class C4 = 0.012%

Order Number	Type	Description	Signal	Height	Cable	Price in USD
9405 221 04312	PR 6221/12,5tC4	PR 6221/12,5t C4 Weighbridge Load Cell 12,5 t	1mV/V	118.5	16m	\$ 2,101
9405 221 04320	PR 6221/20tC4	PR 6221/20tC4 Weighbridge Load Cell 20 t	1mV/V	118.5	16m	\$ 2,176
9405 221 04325	PR 6221/25tC4	PR 6221/25tC4 Weighbridge Load Cell 25 t	2mV/V	118.5	16m	\$ 2,274
9405 221 04330	PR 6221/30tC4	PR 6221/30tC4 Weighbridge Load Cell 30 t	1mV/V	118.5	16m	\$ 2,382
9405 221 04350	PR 6221/50tC4	PR 6221/50tC4 Weighbridge Load Cell 50 t	2mV/V	118.5	16m	\$ 2,536
9405 221 04360	PR 6221/60tC4	PR 6221/60tC4 Weighbridge Load Cell 60 t	1.5mV/V	118.5	16m	\$ 2,588
9405 221 04375	PR 6221/75tC4	PR 6221/75tC4 Weighbridge Load Cell 75 t	1.5mV/V	118.5	16m	\$ 2,691

Weighbridge Load Cells OIML R60 Class C3 = 0.015%, armored cable

Order Number	Type	Description	Signal	Height	Cable	Price in USD
9405 221 23320	PR 6221/20tC3A	PR 6221/20tC3A Weighbridge Load Cell 20 t 4000d armored cable	1mV/V	118.5	16m	\$ 2,012
9405 221 23325	PR 6221/25tC3A	PR 6221/25tC3A Weighbridge Load Cell 25 t 4000d armored cable	1mV/V	118.5	16m	\$ 2,116
9405 221 23330	PR 6221/30tC3A	PR 6221/30tC3A Weighbridge Load Cell 30 t 4000d armored cable	2mV/V	118.5	16m	\$ 2,216
9405 221 23350	PR 6221/50tC3A	PR 6221/50tC3A Weighbridge Load Cell 50 t 4000d armored cable	1mV/V	118.5	16m	\$ 2,368

Pendeo® Truck PR 6224B - Digital Weighbridge Load Cell



- Attention: New order numbers. Can not be installed in same scale with former Pendeo load cells.
- Easy commissioning
- Comprehensive diagnostic function
- Special strain gauge technology for lightning protection
- IP68, IP69



Digital Weighbridge Load Cells OIML R60 Class C3 = 0.015%, C6 = 0.008%

Order Number	Type	Description	Signal	Height mm	Cable	Price in USD
9405 224 23325	PR 6224B/25t C3	PR 6224B/25t C3 Pendeo® Truck - Digital Weighbridge Load Cell 25t, C3	2mV/V	118.5	16m	\$ 2,238
9405 224 26325	PR 6224B/25t C6	PR 6224B/25t C6 Pendeo® Truck - Digital Weighbridge Load Cell 25t, C6	2mV/V	118.6	16m	\$ 3,007
9405 224 23350	PR 6224B/50t C3	PR 6224B/50t C3 Pendeo® Truck - Digital Weighbridge Load Cell 50t, C3	2mV/V	118.7	16m	\$ 2,492
9405 224 26350	PR 6224B/50t C6	PR 6224B/50t C6 Pendeo® Truck - Digital Weighbridge Load Cell 50t, C6	2mV/V	118.8	16m	\$ 3,319
9405 224 23375	PR 6224B/75t C3	PR 6224B/75t C3 Pendeo® Truck - Digital Weighbridge Load Cell 75t, C3	2mV/V	118.9	16m	\$ 2,753
9405 224 26375	PR 6224B/75t C6	PR 6224B/75t C6 Pendeo® Truck - Digital Weighbridge Load Cell 75t, C6	2mV/V	118.9	16m	\$ 3,664

Pendeo® Truck - Accessories

--Mounting Kits See PR6221 - Accessories

Order Number	Type	Description	Price in USD
9405 360 24684	PR 6024/68s	PR 6024/68S Cable junction box, for 8 digital Pendeo load cells	\$ 1,038
9405 360 24624	PR6024/62S	PR 6024/62S Power Supply for digital Pendeo Load Cells	\$ 894

PR 6221 - Accessories

Mounting Kits

Order Number	Type	Description	Height mm	Price in USD
9405 360 21001	PR 6021/00N	PR 6021/00N Load & bottom disc for PR 6221 and Pendeo® Truck incl. Earthing strap	166.5	\$ 167
9405 360 21011	PR 6021/01N	PR 6021/01N Mounting kit for PR 6221 and Pendeo® Truck (includes PR 6021/00N)	190.5	\$ 291
9405 360 21021	PR 6021/02N	PR 6021/02N Set of top and bottom load disc for PR 6221 and Pendeo® Truck incl. turn-stop	166.5	\$ 200
9405 360 21031	PR 6021/03N	PR 6021/03N Mounting kit for PR 6221 and Pendeo® Truck incl. turn-stop	190.5	\$ 331
9405 360 21041	PR 6021/04N	PR 6021/04N Set of self-centering top disc and bottom disc for PR 6221 and Pendeo® Truck	166.5	\$ 205
9405 360 21051	PR 6021/05N	PR 6021/05N Mounting kit for PR 6221 and Pendeo® Truck incl. self-centering load disc	166.5	\$ 376
9405 360 21061	PR 6021/06N	PR 6021/06N Set of self centering top disc and bottom disc incl. turn-stop for PR 6221 and Pendeo® Truck	166.5	\$ 243
9405 360 21071	PR 6021/07N	PR 6021/07N Mounting kit incl. self centering top load disc and bottom load disc incl. turn-stop	166.5	\$ 421

Cable Junction Boxes

Order Number	Type	Description	Price in USD
9405 360 21084	PR 6021/08	Cable junction box, for 8 load cells, polycarbonate, special lightning protection	\$ 282
9405 360 21184	PR 6021/18	Cable junction box with potentiometers, for 8 load cells, polycarbonate	\$ 282
9405 360 21684	PR 6021/68S	Cable junction box, for 8 load cells, stainless steel, Ex, special lightning protection	\$ 743

Digital Converter Connexx®



- Extension of many load cells to a digital solution
- Standard interface CANopen
- No cable junction box needed
- Generation of individual weight values, e.g. for more efficient service
- Can only be ordered with below-listed load cells
- **When ordering, both the Converter and its corresponding Load Cell Order numbers & Price need to be provided. The two units will be connected together when shipped and the converter cannot be added in the field.**

Converter Connexx®

Order no.	Type	Description	Price in USD
9405 103 00000	PR 6203/Digital Kit	Converter Connexx for Inteco	\$388
9405 111 00000	PR 6211/Digital Kit	Converter Connexx for PR 6211	\$388
9405 112 00000	PR 6212/Digital Kit	Converter Connexx for PR 6212	\$388
9405 121 00000	PR 6221/Digital Kit	Converter Connexx for PR 6221	\$388
9405 141 00000	PR 6241/Digital Kit	Converter Connexx for PR 6241	\$388
9405 161 00000	PR 6261/Digital Kit	Converter Connexx for Novego	\$388

Converter Connexx® - Application- Sets

Order no.	Type	Description	Price in USD
9405 361 54031	PR 6154/03	Application set for 3 load cells. Including: 2x PR 6155/05, 1x PR 6152/25, 1x PR 6153/99	\$432
9405 361 54041	PR 6154/04	Application set for 4 load cells. Including: 3x PR 6155/05, 1x PR 6152/25, 1x PR 6153/99	\$516

Converter Connexx® - Accessories

Order no.	Type	Description	Price in USD
9405 361 52101	PR 6152/10	PR 6152/10 Connection cable between Connexx and X3 (10 m)	\$133
9405 361 52251	PR 6152/25	PR 6152/25 Connection cable between Connexx and X3 (25 m)	\$239
9405 361 52401	PR 6152/40	PR 6152/40 Connection cable between Connexx and X3 (40 m)	\$333
9405 361 53981	PR 6153/98	PR 6153/98 Split cable gland	\$29
9405 361 53991	PR 6153/99	PR 6153/99 Terminal resistor for Connexx, M12	\$29
9405 361 55051	PR 6155/05	PR 6155/05 Connection cable between Connexx and Connexx (5 m)	\$82
9405 361 55101	PR 6155/10	PR 6155/10 Connection cable between Connexx and Connexx (10 m)	\$107

- Digital version guarantees fast signaling times for reliable dosing processes
- Thanks to the use of field bus communication, the cable junction box is no longer needed
- The standard interface CANopen ensures straightforward installation and calibration
- CANopen allows for extra-long communication paths of up to 200m
- Weight values can also be generated individually - per load cell - meaning that defective load cells can be easily identified



When ordering, both the Converter and its corresponding Load Cell Order numbers & Price need to be provided. The two units will be connected together when shipped and the converter cannot be added in the field.

PR 6211 - Compact Compression Type Load Cell

Capacity: 30kg to 300kg (60lb to 660lb)



Compact Compression-Type Load Cells OIML R60 Class D1 = 0.05% / 0.04% (500 kg - 10 t)

Order Number	Type	Nominal Load		Height		Cable Length	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches				
9405 262 11311	PR6211/31D1	30	66	25	0.98	3 10	2mV/V	0.7	\$1,236
9405 262 11511	PR6211/51D1	50	110	25	0.98	3 10	2mV/V	0.7	\$1,236
9405 262 11121	PR6211/12D1	100	220	25	0.98	3 10	2mV/V	0.7	\$1,236
9405 262 11221	PR6211/22D1	200	441	25	0.98	3 10	2mV/V	0.7	\$1,236
9405 262 11321	PR6211/32D1	300	661	25	0.98	3 10	2mV/V	0.7	\$1,236

Mounting Kits for PR6011 - Capacity: 30kg to 300kg (66lb to 660lb)

- Nominal capacity range 30kg-300kg (60lb to 660lb)
- Ultra-Compact design
- Integrated lift-off and dummy function



Mounting Kit without Constrainer

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 960 11002	PR6011/00S	Mounting Plate Kit	N/A	N/A	32.3	1.27	Stainless Stl	0.9	\$192

Mounting Kit with Integrated Constrainer

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 960 11202	PR6011/20S	Mini Flexlock	0.45	N/A	32.3	1.27	Stainless Stl	1.1	\$339

Mounting Kit with additional Functions

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 360 12002	PR6012/00S	Mounting Plate Kit	N/A	N/A	42.2	1.66	Stainless Stl	4.2	\$349

Mounting Kit with additional Functions and integrated constrainer

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 360 12202	PR6012/20S	Mini Flexlock	0.45	N/A	42.2	1.66	Stainless Stl	3.6	\$499

Special Mounting Kits

Order Number	Type	Description	Material	Shipping Weight lb.	List Price USD
9405 360 11092	PR6011/09S	PR6011/09S Mounting kit adapter for PR 6211/30 kg...300 kg in PR 6012 MK	Stainless Stl	1.3	\$228
9405 360 11031	PR6011/03N	PR 6011/03N Rubber mounting kit, 30 kg ... 300 kg - Only with PR 6011 mounting kits	Rubber	0.7	\$164

PR 6212 - Compact Compression Type Load Cell

Capacity: 500kg to 10,000kg (1,100lb to 22,000lb)
 Maximum Corrosion resistance
 High-Temperature version available up to 350 F
 Easy and failure-free installation
 USA (FM): IS CL I, II, III, DIV 1 GP ABCDEGFT4
 Stainless Steel and IP68, IP69



Compact Compression-Type Load Cells OIML R60 Class C1 = 0.04%

Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 212 01150	PR6212/500kgC1	500	1,102	46.6	1.81	5	16	2mV/V	2.9	\$1,204
9405 212 01210	PR6212/1tC1	1,000	2,205	46.6	1.81	5	16	2mV/V	2.9	\$1,204
9405 212 01220	PR6212/2tC1	2,000	4,409	46.6	1.81	5	16	2mV/V	2.9	\$1,204
9405 212 01230	PR6212/3tC1	3,000	6,614	46.6	1.81	5	16	2mV/V	2.9	\$1,204
9405 212 01250	PR6212/5tC1	5,000	11,023	46.6	1.81	5	16	2mV/V	2.9	\$1,204
9405 212 01310	PR6212/10tC1	10,000	22,046	46.6	1.81	5	16	2mV/V	2.9	\$1,204



Epoxy Coated Version

Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 812 01150	PR6212/500kgC1-L	500	1,102	46.6	1.81	5	16	2mV/V	2.9	\$1,700
9405 812 01210	PR6212/1tC1-L	1,000	2,205	46.6	1.81	5	16	2mV/V	2.9	\$1,700
9405 812 01220	PR6212/2tC1-L	2,000	4,409	46.6	1.81	5	16	2mV/V	2.9	\$1,700
9405 812 01230	PR6212/3tC1-L	3,000	6,614	46.6	1.81	5	16	2mV/V	2.9	\$1,700
9405 812 01250	PR6212/5tC1-L	5,000	11,023	46.6	1.81	5	16	2mV/V	2.9	\$1,700
9405 812 01310	PR6212/10tC1-L	10,000	22,046	46.6	1.81	5	16	2mV/V	2.9	\$1,700

Usable Temperature Range: -40°F to 356°F (-40°C to 180°C)

High Temperature Version of Compact Compression-Type Load Class L = 0.25%

Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 412 01150	PR6212/500kg LT	500	1,102	46.6	1.81	5	16	2mV/V	2.9	\$2,693
9405 412 01210	PR6212/1t LT	1,000	2,205	46.6	1.81	5	16	2mV/V	2.9	\$2,693
9405 412 01220	PR6212/2t LT	2,000	4,409	46.6	1.81	5	16	2mV/V	2.9	\$2,693
9405 412 01230	PR6212/3t LT	3,000	6,614	46.6	1.81	5	16	2mV/V	2.9	\$2,693
9405 412 01250	PR6212/5t LT	5,000	11,023	46.6	1.81	5	16	2mV/V	2.9	\$2,693

Mounting Kits for PR6012 (1,100lb - 22,000lb)

Low Installation Height
 Maintenance Free
 Capacity: 500kg to 10,000kg (1,100lb to 22,000lb)



Mounting Kits with lift-off, jack-up, and dummy functions, without Constrainer

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 360 12021	PR6012/02N	PR 6012/02N Maxi FLEX Mounting kit for PR 6212/ 500kg...10t	N/A	N/A	80.0	3.15	Steel Zinc	14.9	\$290
9405 360 12022	PR6012/02S	PR 6012/02S Maxi FLEX Mounting kit for PR 6212/ 500kg...10t, corrosion resistant	N/A	N/A	80.0	3.15	Stainless Stl	14.9	\$435

FLEXLOCKS with Integrated Lift-off, Jack -up, dummy functions WITH Integrated Constrainer

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 360 12321	PR6012/32N	PR 6012/32N Maxi FLEXLOCK 5 kN Mounting kit for PR 6212/ 500kg...10t	5	>10	80.0	3.15	Steel Zinc	19.4	\$624
9405 360 12322	PR6012/32S	PR 6012/32S Maxi FLEXLOCK 5 kN Mounting kit for PR 6212/ 500kg...10t, corrosion resistant	5	>10	80.0	3.15	Stainless Stl	19.4	\$1,156
9405 360 12421	PR6012/42N	PR 6012/42N Maxi FLEXLOCK 20 kN Mounting kit for PR 6212/ 500kg...10t, advanced constrainer	20	>50	80.0	3.15	Steel Zinc	20.3	\$768
9405 360 12422	PR6012/42S	PR 6012/42S Maxi FLEXLOCK 20 kN Mounting kit for PR 6212/ 500kg...10t, corrosion resistant, advanced constrainer	20	>50	80.0	3.15	Stainless Stl	20.3	\$1,446

Mounting Kits without Constrainer

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 360 12011	PR6012/01N	PR 6012/01N Mini FLEX Mounting kit for PR 6212/ 500kg...10t	N/A	N/A	80.0	3.15	Steel Zinc	8.8	\$217
9405 360 12012	PR6012/01S	PR 6012/01S Mini FLEX Mounting kit for PR 6212/ 500kg...10t, corrosion resistant	N/A	N/A	80.0	3.15	Stainless Stl	8.8	\$362

FLEXLOCKS with Integrated Constrainer

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 360 12311	PR6012/31N	PR 6012/31N Mini FLEXLOCK 5 kN Mounting kit for PR 6212/ 500kg...10t	5	>10	80.0	3.15	Steel Zinc	15.5	\$550
9405 360 12312	PR6012/31S	PR 6012/31S Mini FLEXLOCK 5 kN Mounting kit for PR 6212/ 500kg...10t, corrosion resistant	5	>10	80.0	3.15	Stainless Stl	15.5	\$1,085
9405 360 12411	PR6012/41N	PR 6012/41N Mini FLEXLOCK 20 kN Mounting kit for PR 6212/ 500kg...10t	20	>50	80.0	3.15	Steel Zinc	16.4	\$695
9405 360 12412	PR6012/41S	PR 6012/41S Mini FLEXLOCK 20 kN Mounting kit for PR 6212/ 500kg...10t, corrosion resistant	20	>50	80.0	3.15	Stainless Stl	16.4	\$1,375

Special Mounting Kits

Order Number	Type	Description	Height		Material	Shipping Weight lb.	List Price USD
			mm	in.			
9405 360 12532	PR6012/53S	PR 6012/53S Additional Lift-off protector for PR 6012/02S,N			Stainless Steel		\$217
9405 360 12542	PR6012/54S	PR 6012/54S Additional Lift-off protector for PR 6012/42S,N			Stainless Steel		\$217
9405 360 12632	PR6012/63S	PR 6012/54S Additional Lift-off protector for PR 6012/42S,N	80.0	3.15	Stainless Steel	18.9	\$795

PR 6202 - Hygienic Precision Compression Load Cell

- Hygienic product design according to EHEDG requirements- Easy to clean
- Highest destructive loads
- Resistant against vibrations
- Stainless steel 1.4404
- Ex-versions and C4 on request available
- IP68, IP69



Available

Capacity: 1,000kg to 10,000kg (2,205lb to 22,000lb)

Hygienic Compression-Type Load Cells OIML R60 Class C1 = 0.03%

Order Number	Type	Nominal Load		Height		Cable Length		Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches	m	ft.			
9405 202 02210	PR6202/1tC1	1,000	2,205	118.5	4.67	5	16	2mV/V	4.6	\$1,555
9405 202 02220	PR6202/2tC1	2,000	4,409	118.5	4.67	5	16	2mV/V	4.6	\$1,555
9405 202 02240	PR6202/4tC1	4,000	8,819	118.5	4.67	5	16	2mV/V	4.6	\$1,642
9405 202 02260	PR6202/6tC1	6,000	13,227	118.5	4.67	5	16	2mV/V	4.6	\$1,642
9405 202 02310	PR6202/10tC1	10,000	22,046	118.5	4.67	5	16	2mV/V	5.5	\$1,642

Hygienic Compression-Type Load Cells OIML R60 Class C3 = 0.015%

Order Number	Type	Nominal Load		Height		Cable Length		Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches	m	ft.			
9405 202 03220	PR6202/2tC3	2,000	4,409	118.5	4.67	5	16	2mV/V	4.6	\$2,484
9405 202 03240	PR6202/4tC3	4,000	8,819	118.5	4.67	5	16	2mV/V	4.6	\$2,622
9405 202 03260	PR6202/6tC3	6,000	13,227	118.5	4.67	5	16	2mV/V	4.6	\$2,622
9405 202 03310	PR6202/10tC3	10,000	22,046	118.5	4.67	5	16	2mV/V	5.5	\$2,736



Capacity: 1,000kg to 10,000kg (2,205lb to 22,000lb)

PR6002 Mounting Kits

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct	mm	in.			
9405 360 02102	PR6002/10S	PR 6002/10S Mounting kit incl. Top and Bottom load disk, stops and constrainer, 1 t ... 10 t, 25 kN	25	>50	190.5	7.5	Stainless	49.0	\$2,002
9405 360 02022	PR6002/02S	PR 6002/02S Mounting kit incl. Top and Bottom load disk, 1 t ... 10 t	N/A	>35	190.5	7.5	Stainless	9.9	\$682
9405 360 02042	PR6002/04S	PR 6002/04S Mounting kit incl. Top and Bottom load disk and stops, 1 t ... 10 t	N/A	N/A	190.5	7.5	Stainless	29.8	\$1,093
9405 360 02002	PR6002/00S	PR 6002/00S Top and Bottom load disk for PR 6202, 1 t ... 10 t	N/A	N/A	160.5	6.3	Stainless	2.6	\$330

PR 6202 - Hygienic Precision Compression High Capacity Load Cell

- Hygienic product design according to EHEDG requirements- Easy to clean
- Highest destructive loads
- Resistant against vibrations
- Stainless steel 1.4404
- Ex-versions and C4 on request available
- IP68, IP69



Available

Capacity: 25,000kg to 50,000kg (55,000lb to 110,000lb)

Hygienic Compression-Type Load Cells OIML R60 Class C1 = 0.03%

Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 202 02325	PR6202/25tC1	25,000	55,115	118.5	4.67	12	39	2mV/V	8.2	\$1,766
9405 202 02350	PR6202/50tC1	50,000	110,229	118.5	4.67	12	39	2mV/V	9.0	\$2,225

Hygienic Compression-Type Load Cells OIML R60 Class C3 = 0.015%

Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 202 03325	PR6202/25tC3	25,000	55,115	118.5	4.67	12	39	2mV/V	8.2	\$2,875
9405 202 03350	PR6202/50tC3	50,000	110,229	118.5	4.67	12	39	2mV/V	9.0	\$3,322



Capacity: 25,000kg to 50,000kg (55,000lb to 110,000lb)

PR6002 Mounting Kits

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 360 02112	PR6002/11S	PR 6002/11S Mounting kit incl. Top and Bottom load disk, stops and constrainer, 25 t ... 50 t, 25 kN	25	>50	190.5	7.5	Stainless	49.4	\$2,002
9405 360 02032	PR6002/03S	PR 6002/03S Mounting kit incl. Top and Bottom load disk, 25 t...50 t	N/A	>35	190.5	7.5	Stainless	10.5	\$682
9405 360 02052	PR6002/05S	PR 6002/05S Mounting kit incl. Top and Bottom load disk and stops, 25 t ... 50 t	N/A	N/A	190.5	7.5	Stainless	30.2	\$1,093
9405 360 02012	PR6002/01S	PR 6002/01S Top and Bottom load disk for PR 6202, 25 t ... 50 t	N/A	N/A	160.5	6.3	Stainless	3.3	\$310

Pendeo® Process PR 6204B - Digital Compression Type Load Cell

Digital Compression Type Load Cell OIML R60, Accuracy Class C3 = 0.015%

Order Number	Type	Description	Height		Cable Length		Signal	List Price USD
			mm	inches	m	ft.		
9405 204 23220	PR 6204B/2t C3	PR 6204B/2t C3 Pendeo® Process 2 t C3	118.5	4.66	5	16	2mV/V	\$2,629
9405 204 23250	PR 6204B/5t C3	PR 6204B/5t C3 Pendeo® Process 5 t C3	118.5	4.66	5	16	2mV/V	\$2,754
9405 204 23310	PR 6204B/10t C3	PR 6204B/10t C3 Pendeo® Process 10 t C3	118.5	4.66	5	16	2mV/V	\$2,857
9405 204 23325	PR 6204B/25t C3	PR 6204B/25t C3 Pendeo® Process 25 t C3	118.5	4.66	5	16	2mV/V	\$2,981
9405 204 23350	PR 6204B/50t C3	PR 6204B/50t C3 Pendeo® Process 50 t C3	118.5	4.66	5	16	2mV/V	\$3,384

Digital Compression Type Load Cell OIML R60, Accuracy Class C3 = 0.008%

Order Number	Type	Description	Height		Cable Length		Signal	List Price USD
			mm	inches	m	ft.		
9405 204 26325	PR 6204B/25t C6	PR 6204B/25t C6 Pendeo® Process 25 t C6	118.5	4.66	5	16	2mV/V	\$3,650
9405 204 26350	PR 6204B/50t C6	PR 6204B/50t C6 Pendeo® Process 50 t C6	118.5	4.66	5	16	2mV/V	\$4,053

Pendeo® - Load Cell Accessories

Mounting Kits - see Inteco - Load Cell Accessories

Electronic Accessories - see Pendeo Truck - Cable junction boxes and cables

Contego®



Contego Hygienic Mount incl. PR 6241 Load Cell Class D1 = 0.04%										
Order Number	Type	Nominal Load		Height		Cable Length		Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches	m	ft.			
9405 241 61110	Contego 100kg D1 A Hygienic weighing module 100 kg, A-Version	100	220	118	4.65	5	16	2mV/V	27	\$3,282
9405 241 61120	Contego 200kg D1 A Hygienic weighing module 200 kg, A-Version	200	441	118	4.65	5	16	2mV/V	27	\$3,282
9405 241 61130	Contego 300kg D1 A Hygienic weighing module 300 kg, A-Version	300	661	118	4.65	5	16	2mV/V	27	\$3,282
9405 241 61150	Contego 500kg D1 A Hygienic weighing module 500 kg, A-Version	500	1,102	118	4.65	5	16	2mV/V	27	\$3,282
9405 241 61210	Contego 1t D1 A Hygienic weighing module 1000 kg, A-Version	1,000	2,205	118	4.65	5	16	2mV/V	27	\$3,282
9405 241 61220	Contego 2t D1 A Hygienic weighing module 2000 kg, A-Version	2,000	4,409	118	4.65	5	16	2mV/V	27	\$3,282

Contego Hygienic Mount incl. PR 6241 Load Cell Class C3 = 0.015%										
Order Number	Type	Nominal Load		Height		Cable Length		Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches	m	ft.			
9405 241 63120	Contego 200kg C3 A Hygienic weighing module 200 kg, A-Version	200	441	118	4.65	5	16	2mV/V	27	\$3,923
9405 241 63130	Contego 300kg C3 A Hygienic weighing module 300 kg, A-Version	300	661	118	4.65	5	16	2mV/V	27	\$3,923
9405 241 63150	Contego 500kg C3 A Hygienic weighing module 500 kg, A-Version	500	1,102	118	4.65	5	16	2mV/V	27	\$3,923
9405 241 63210	Contego 1t C3 A Hygienic weighing module 1000 kg, A-Version	1,000	2,205	118	4.65	5	16	2mV/V	27	\$3,923
9405 241 63220	Contego 2t C3 A Hygienic weighing module 2000 kg, A-Version	2,000	4,409	118	4.65	5	16	2mV/V	27	\$3,923

Contego® - Accessories

Mounting Plate

Order Number	Type	Description	Height		Material	Shipping Weight lb.	List Price USD
			mm	in.			
9405 360 41802	PR6041/80S	PR 6041/80S Mounting Plate Contego	40	1.57	Stainless Steel		\$506



PR 6241 - Compression S-Type Load Cell



Capacity: 100kg to 2,000kg (220lb to 4,400lb)

Compression S-Type Load Cells OIML R60 Class D1 = 0.04%										
Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 262 41121	PR6241/12D1	100	220	60	2.36	5	16	2mV/V	2.6	\$1,529
9405 262 41221	PR6241/22D1	200	441	60	2.36	5	16	2mV/V	2.6	\$1,529
9405 262 41321	PR6241/32D1	300	661	60	2.36	5	16	2mV/V	2.6	\$1,529
9405 262 41521	PR6241/52D1	500	1,102	60	2.36	5	16	2mV/V	2.6	\$1,529
9405 262 41131	PR6241/13D1	1,000	2,205	60	2.36	5	16	2mV/V	4.2	\$1,703
9405 262 41231	PR6241/23D1	2,000	4,409	60	2.36	5	16	2mV/V	4.6	\$1,703

Precision Compression S-Type Load Cells OIML R60 Class C3 = 0.015%										
Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 262 41227	PR6241/22C3	200	441	60	2.36	5	16	2mV/V	2.6	\$2,093
9405 262 41327	PR6241/32C3	300	661	60	2.36	5	16	2mV/V	2.6	\$2,093
9405 262 41527	PR6241/52C3	500	1,102	60	2.36	5	16	2mV/V	2.6	\$2,093
9405 262 41137	PR6241/13C3	1,000	2,205	60	2.36	5	16	2mV/V	4.2	\$2,247
9405 262 41237	PR6241/23C3	2,000	4,409	60	2.36	5	16	2mV/V	4.6	\$2,247

Precision Compression S-Type Load Cells OIML R60 Class C6 = 0.008%										
Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 262 41228	PR6241/22C6	200	441	60	2.36	5	16	2mV/V	2.6	\$2,624
9405 262 41328	PR6241/32C6	300	661	60	2.36	5	16	2mV/V	2.6	\$2,624
9405 262 41528	PR6241/52C6	500	1,102	60	2.36	5	16	2mV/V	2.6	\$2,624
9405 262 41138	PR6241/13C6	1,000	2,205	60	2.36	5	16	2mV/V	4.2	\$2,813
9405 262 41238	PR6241/23C6	2,000	4,409	60	2.36	5	16	2mV/V	4.6	\$2,813



Capacity: 100kg to 2,000kg (220lb to 4,400lb)

Mounting Kits without Constrainer										
Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD	
			Contin.	Destruct.	mm	in.				
9405 360 41041	PR6041/04N	PR 6041/04N Rubber mounting kit for PR 6241	N/A	N/A	55	2.2	Rubber	0.8	\$169	
9405 360 41301	PR6041/30N	PR 6041/30N Mounting plate kit for PR 6241,	N/A	N/A	92	3.6	Steel Zinc	6.2	\$308	
9405 360 41302	PR6041/30S	PR 6041/30S Mounting plate kit for PR 6241, 100 kg ... 2 t, stainless steel	N/A	N/A	92	3.6	Stainless Steel	6.2	\$474	
9405 360 41512	PR6041/51S	PR 6041/51S Load Cell Foot for PR 6241, 100 kg ... 2 t, stainless steel	N/A	N/A	44	1.7	Stainless Steel	1.7	\$370	

Capacity: 100kg to 2,000kg (220lb to 4,400lb)

FlexLocks with Integrated Constrainer										
Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD	
			Contin.	Destruct.	mm	in.				
9405 360 43301	PR6043/30N	PR 6043/30N Mini Flexlock, mounting kit for PR 6241, 100 kg ... 2 t	6	>20	92	3.6	Steel Zinc	10.6	\$700	
9405 360 43302	PR6043/30S	PR 6043/30S Mini Flexlock, mounting kit for PR 6241, 100 kg ... 2 t, stainless steel	6	>20	92	3.6	Stainless Steel	10.6	\$1,258	

Load Disc										
Order Number	Type	Description	Material	Shipping Weight lb.	List Price USD					
9405 360 43312	PR6043/31S	PR 6043/31S Accessory for PR 6241- Load disc, 100 kg ... 2 t, stainless steel	Stainless Steel	0.5	\$79					

PR 6241 - Compression S-Type Load Cell



Capacity: 3,000kg to 5,000kg (6,600lb to 11,000lb)

Compression S-Type Load Cells OIML R60 Class D1 = 0.04%

Order Number	Type	Nominal Load		Height		Cable	Length	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 262 41331	PR6241/33D1	3,000	6,614	90	3.54	5	16	2mV/V	4.6	\$1,893
9405 262 41531	PR6241/53D1	5,000	11,023	90	3.54	5	16	2mV/V	4.9	\$1,893

Precision Compression S-Type Load Cells OIML R60 Class C3 = 0.015%

Order Number	Type	Nominal Load		Height		Cable	Length	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 262 41337	PR6241/33C3	3,000	6,614	90	3.54	5	16	2mV/V	4.6	\$2,247
9405 262 41537	PR6241/53C3	5,000	11,023	90	3.54	5	16	2mV/V	4.9	\$2,247

Precision Compression S-Type Load Cells OIML R60 Class C6 = 0.008%

Order Number	Type	Nominal Load		Height		Cable	Length	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 262 41338	PR6241/33C6	3,000	6,614	90	3.54	5	16	2mV/V	4.6	\$2,813

Capacity: 3,000kg to 5,000kg (6,600lb to 11,000lb)

Mounting Kits without Constrainer

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 360 41401	PR6041/40N	PR 6041/40N Mounting plate kit for PR 6241, 3 t ... 5 t	N/A	N/A	130	5.1	Steel, zinc-plated	15.2	\$418
9405 360 41402	PR6041/40S	PR 6041/40S Mounting plate kit for PR 6241, 3 t ... 5 t, stainless steel	N/A	N/A	130	5.1	Stainless	15.2	\$705

Capacity: 3,000kg to 5,000kg (6,600lb to 11,000lb)

FlexLocks with Integrated Constrainer

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 360 43401	PR6043/40N	PR 6043/40N Mini Flexlock, mounting kit for PR 6241, 3 t ... 5 t	8	>50	130	5.1	Steel, zinc-plated	23.4	\$997
9405 360 43402	PR6043/40S	PR 6043/40S Mini Flexlock, mounting kit for PR 6241, 3 t ... 5 t, stainless steel	8	>50	130	5.1	Stainless	23.4	\$1,511

PR6044 - Mounting Kits

-Includes integrated Lift-off, jack-up, and dummy functions



Capacity: 100kg to 5,000kg (220lb to 4,400lb)

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 360 44002	PR6044/00S	PR 6044/00S Mounting kit for PR 6241/ 100kg...2t	N/A	N/A	92	3.6	Stainless	7.1	\$518
9405 360 44102	PR6044/10S	PR 6044/10S MaxiFLEXLOCK 6 kN for PR 6241/ 100kg...2t	6	20	92	3.6	Stainless	12.3	\$1,385

Capacity: 3,000kg to 5,000kg (6,600lb to 11,000lb)

Order Number	Type	Description	H-Force (kN)		Height		Material	Shipping Weight lb.	List Price USD
			Contin.	Destruct.	mm	in.			
9405 360 44012	PR6044/01S	PR 6044/01S Mounting kit for PR 6241/ 3t...5t	N/A	N/A	130	5.1	Stainless	16.5	\$1,090
9405 360 44112	PR6044/11S	PR 6044/11S MaxiFLEXLOCK 18 kN for PR 6241/ 3t...5t	18	50	14	5.1	Stainless	25.1	\$1,664

PR 6246 - Tension S-Type Load Cell



Capacity: 100kg to 500kg (220lb to 1,100lb)

Tension S-Type Load Cells OIML R60 Class D1 = 0.04%

Order Number	Type	Nominal Load		Height		Cable	Length	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches	m	ft.			
9405 262 46121	PR6246/12D1	100	220	60	2.36	5	16	2mV/V	2.6	\$1,514
9405 262 46221	PR6246/22D1	200	441	60	2.36	5	16	2mV/V	2.6	\$1,514
9405 262 46321	PR6246/32D1	300	661	60	2.36	5	16	2mV/V	2.6	\$1,514
9405 262 46521	PR6246/52D1	500	1,102	60	2.36	5	16	2mV/V	2.6	\$1,514

Capacity: 100kg to 500kg (220lb to 1,100lb)

Precision Tension S-Type Load Cells OIML R60 Class C3 = 0.015%

Order Number	Type	Nominal Load		Height		Cable	Length	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches	m	ft.			
9405 262 46227	PR6246/22C3	200	441	60	2.36	5	16	2mV/V	2.6	\$2,093
9405 262 46327	PR6246/32C3	300	661	60	2.36	5	16	2mV/V	2.6	\$2,093
9405 262 46527	PR6246/52C3	500	1,102	60	2.36	5	16	2mV/V	2.6	\$2,093

Capacity: 100kg to 500kg (220lb to 1,100lb)

Precision Tension S-Type Load Cells OIML R60 Class C6 = 0.008%

Order Number	Type	Nominal Load		Height		Cable	Length	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches	m	ft.			
9405 262 46228	PR6246/22C6	200	441	60	2.36	5	16	2mV/V	2.6	\$2,974
9405 262 46328	PR6246/32C6	300	661	60	2.36	5	16	2mV/V	2.6	\$2,974
9405 262 46528	PR6246/52C6	500	1,102	60	2.36	5	16	2mV/V	2.6	\$2,974



Capacity: 100kg to 500kg (220lb to 1,100lb)

Swivel Bearing Kits

Order Number	Type	Description	Material	Shipping Weight lb.	List Price USD
9405 360 46001	PR6046/00N	PR 6046/00N Accessory for PR 6246 - Swivel bearing kits, 100 kg ... 500 kg	Steel, zinc-plated	0.9	\$172
9405 360 46002	PR6046/00S	PR 6046/00S Accessory for PR 6246 - Swivel bearing kits, 100 kg ... 500 kg, stainless steel	Stainless Steel	0.8	\$332

PR 6246 - Tension S-Type Load Cell



Capacity: 1,000kg to 3,000kg (2,200lb to 6,600lb)

Tension S-Type Load Cells OIML R60 Class D1 = 0.04%

Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 262 46131	PR6246/13D1	1,000	2,205	60	2.36	5	16	2mV/V	4.2	\$1,703
9405 262 46231	PR6246/23D1	2,000	4,409	60	2.36	5	16	2mV/V	4.6	\$1,703
9405 262 46331	PR6246/33D1	3,000	6,614	90	3.54	5	16	2mV/V	4.6	\$1,703

Capacity: 1,000kg to 3,000kg (2,200lb to 6,600lb)

Precision Tension S-Type Load Cells OIML R60 Class C3 = 0.015%

Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 262 46137	PR6246/13C3	1,000	2,205	60	2.36	5	16	2mV/V	4.2	\$2,247
9405 262 46237	PR6246/23C3	2,000	4,409	60	2.36	5	16	2mV/V	4.6	\$2,247
9405 262 46337	PR6246/33C3	3,000	6,614	90	3.54	5	16	2mV/V	4.6	\$2,247

Capacity: 1,000kg to 3,000kg (2,200lb to 6,600lb)

Precision Tension S-Type Load Cells OIML R60 Class C6 = 0.008%

Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 262 46138	PR6246/13C6	1,000	2,205	60	2.36	5	16	2mV/V	4.2	\$3,144
9405 262 46238	PR6246/23C6	2,000	4,409	60	2.36	5	16	2mV/V	4.6	\$3,144
9405 262 46338	PR6246/33C6	3,000	6,614	90	3.54	5	16	2mV/V	4.6	\$3,144



Capacity: 1,000kg to 3,000kg (2,200lb to 6,600lb)

Swivel Bearing Kits

Order Number	Type	Description	Material	Shipping Weight lb.	List Price USD
9405 360 46111	PR6046/11N	PR 6046/11N Accessory for PR 6246 - Swivel bearing kits, 1 t ... 3 t	Steel Zinc	3.0	\$354
9405 360 46112	PR6046/11S	PR 6046/11S Accessory for PR 6246 - Swivel bearing kits, 1 t ... 3 t, stainless steel	Stainless Stl	2.6	\$678

PR 6251 - Pancake Level Sensor



Capacity: 500kg to 5,000kg (1,100lb to 11,000lb)

Pancake Sensor, Accuracy Class L = 0.5%										
Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 262 51529	PR6251/52L	500	1,102	25	1	5	16	2mV/V	2.6	\$1,070
9405 262 51139	PR6251/13L	1,000	2,205	25	1	5	16	2mV/V	2.6	\$1,070
9405 262 51239	PR6251/23L	2,000	4,409	25	1	5	16	2mV/V	2.6	\$1,070
9405 262 51339	PR6251/33L	3,000	6,614	25	1	5	16	2mV/V	2.6	\$1,070
9405 262 51539	PR6251/53L	5,000	11,023	25	1	5	16	2mV/V	2.6	\$1,070

Capacity: 500kg to 5,000kg (1,100lb to 11,000lb)

Pancake Sensor, Accuracy Class L = 0.5%, with Analog Amplifier (4-20mA)										
Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 562 51529	PR6251/52LA	500	1,102	25	1	5	16	4-20mA	2.6	\$1,564
9405 562 51139	PR6251/13LA	1,000	2,205	25	1	5	16	4-20mA	2.6	\$1,564
9405 562 51239	PR6251/23LA	2,000	4,409	25	1	5	16	4-20mA	2.6	\$1,564
9405 562 51339	PR6251/33LA	3,000	6,614	25	1	5	16	4-20mA	2.6	\$1,564
9405 562 51539	PR6251/53LA	5,000	11,023	25	1	5	16	4-20mA	2.6	\$1,564



Capacity: 500kg to 5,000kg (1,100lb to 11,000lb)

PR 6251 - Screw-in Foot Accessories										
Order Number	Type	Description	Height		Material	Shipping Weight lb.	List Price USD			
			mm	in.						
9405 360 51202	PR6051/20S	PR 6051/20S Screw-In adaptor for Pancake level sensor up to 2t	155	6.1	Stainless	3.7	\$334			
9405 360 51212	PR6051/21S	PR 6051/21S Screw-In adaptor for Pancake level sensor up to 5t	155	6.1	Stainless	3.7	\$334			

Capacity: 500kg to 5,000kg (1,100lb to 11,000lb)

Mounting Plates										
Order Number	Type	Description	Height		Material	Shipping Weight lb.	List Price USD			
			mm	in.						
9405 960 51122	PR6051/12S	PR 6051/12S Base plate for PR 6251, 500 kg...16 t, stainless steel	18	0.7	Stainless	3.3	\$278			
9405 960 51002	PR6051/00S	PR 6051/00S Transition plate for PR 6251, stainless steel	12	0.4	Stainless	3.7	\$150			

Capacity: 10,000kg to 20,000kg (22,000lb to 35,000lb)

PR 6251 - Pancake Level Sensor, Accuracy Class L = 0.5%										
Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 262 51149	PR6251/14L	10,000	22,046	35	1.4	5	16	2mV/V	3.0	\$1,378
9405 262 51249	PR6251/24L	16,000	35,273	35	1.4	5	16	2mV/V	3.0	\$1,378

Capacity: 10,000kg to 20,000kg (22,000lb to 35,000lb)

Pancake Sensor, Accuracy Class L = 0.5%, with Analog Amplifier (4-20mA)										
Order Number	Type	Nominal Load		Height		Cable m	Length ft.	Signal	Shipping Weight lb.	List Price USD
		kg	lb.	mm	inches					
9405 562 51149	PR6251/14LA	10,000	22,046	35	1.4	5	16	4-20mA	3.0	\$1,893
9405 562 51249	PR6251/24LA	16,000	35,273	35	1.4	5	16	4-20mA	3.0	\$1,893

Capacity: 10,000kg to 20,000kg (22,000lb to 35,000lb)

PR 6251 - Accessories										
Order Number	Type	Description	Height		Material	Shipping Weight lb.	List Price USD			
			mm	in.						
9405 360 51222	PR6051/22S	PR 6051/22S Screw-In adaptor for Pancake level sensor up to 10t	155	6.1	Stainless	3.7	\$334			

Capacity: 10,000kg to 20,000kg (22,000lb to 35,000lb)

Mounting Plate										
Order Number	Type	Description	Height		Material	Shipping Weight lb.	List Price USD			
			mm	in.						
9405 960 51122	PR6051/12S	PR 6051/12S Base plate for PR 6251, 500 kg...16 t, stainless steel	15	0.6	Stainless	3.3	\$278			
9405 960 51002	PR6051/00S	PR 6051/00S Transition plate for PR 6251, stainless steel	12	0.4	Stainless	3.7	\$150			

PR 40 - Single Point Aluminum Load Cells

IP66 + IP67



Low-Profile Single Point Load Cell OIML R60, Class C3 = 0.02%, MR (Multi-Range)

Order Number	Type	Nominal Load		Cable m	Length ft.	Signal	List Price USD
		kg	lb.				
9409 240 07005	PR 40/5 kg C3MR	5	10	0.5	1.5	2mV/V	\$189
9409 240 07007	PR 40/7,5 kg C3MR	7.5	15	0.5	1.5	2mV/V	\$189
9409 240 07010	PR 40/10 kg C3MR	10	20	0.5	1.5	2mV/V	\$189
9409 240 07015	PR 40/15 kg C3MR	15	30	0.5	1.5	2mV/V	\$189
9409 240 07020	PR 40/20 kg C3MR	20	40	0.5	1.5	2mV/V	\$189
9409 240 07030	PR 40/30 kg C3MR	30	60	0.5	1.5	2mV/V	\$189
9409 240 07040	PR 40/40 kg C3MR	40	80	0.5	1.5	2mV/V	\$189
9409 240 07050	PR 40/50 kg C3MR	50	100	0.5	1.5	2mV/V	\$189
Order Number	Type	Description		Cable	Signal	List Price USD	
9409 240 06xxx	PR 40/xx kg C6	Single Point Load Cell-C6 All Capacities		1.5 ft	2mV/V	\$250	
9409 640 07xxx	PR 40/xx kg C3MRE	Single Point Load Cell-C3MRE-All Capacities		1.5 ft	2mV/V	\$243	
9409 640 06xxx	PR 40/xx kg C6E	Single Point Load Cell-C6E - All Capacities		1.5 ft	2mV/V	\$303	
9409 240 0Cxxx	PR 40/xx kg III 5000 S	Single Point Load Cell-NTEP III 5000S - All Capacities		10 ft	2mV/V	\$189	

PR 43 - Single Point Aluminum Load Cells

IP66 + IP67



Compact Single Point Load Cell OIML R60, Class C3 = 0.02%, MR (M)

Order Number	Type	Nominal Load		Cable m	Length ft.	Signal	List Price USD
		kg	lb.				
9409 243 07006	PR 43/6 kg C3MR	6	12	3	10	2mV/V	\$215
9409 243 07010	PR 43/10 kg C3MR	10	20	3	10	2mV/V	\$215
9409 243 07015	PR 43/15 kg C3MR	15	30	3	10	2mV/V	\$215
9409 243 07020	PR 43/20 kg C3MR	20	40	3	10	2mV/V	\$215
9409 243 07030	PR 43/30 kg C3MR	30	60	3	10	2mV/V	\$215
9409 243 07050	PR 43/50 kg C3MR	50	100	3	10	2mV/V	\$215
9409 243 07075	PR 43/75 kg C3MR	75	150	3	10	2mV/V	\$215
9409 243 07110	PR 43/100 kg C3MR	100	200	3	10	2mV/V	\$215
9409 243 07120	PR 43/200 kg C3MR	200	400	3	10	2mV/V	\$215
Order Number	Type	Description		ft.	Signal	List Price USD	
9409 243 06xxx	PR 43/xx kg C6	Single Point Load Cell-C6 All Capacities		10	2mV/V	\$284	
9409 643 07xxx	PR 43/xx kg C3MRE	Single Point Load Cell-C3MRE-All Capacities		10	2mV/V	\$273	
9409 643 06xxx	PR 43/xx kg C6E	Single Point Load Cell-C6E - All Capacities		10	2mV/V	\$342	
9409 243 0Cxxx	PR 43/xx kg III 5000 S	Single Point Load Cell-NTEP 5000 S - All Capacities		10	2mV/V	\$215	

PR 47 - High Capacity Single Point Aluminum Load Cells

IP66 + IP67



High Capacity Single Point Load Cell OIML R60, Class C3 = 0.02%, MR (Multi-Range)

Order Number	Type	Nominal Load		Cable	Length	Signal	List Price USD
		kg	lb.	m	ft.		
9409 247 07110	PR 47/100 kg C3MR	100	200	3	10	2mV/V	\$449
9409 247 07115	PR 47/150 kg C3MR	150	300	3	10	2mV/V	\$449
9409 247 07120	PR 47/200 kg C3MR	200	400	3	10	2mV/V	\$449
9409 247 07125	PR 47/250 kg C3MR	250	500	3	10	2mV/V	\$449
9409 247 07130	PR 47/300 kg C3MR	300	600	3	10	2mV/V	\$449
9409 247 07150	PR 47/500kg C3MR	500	1000	3	10	2mV/V	\$449
9409 247 07175	PR 47/750kg C3MR	750	1500	3	10	2mV/V	\$449
Order Number	Type	Description			Cable	Signal	List Price USD
9409 247 06xxx	PR 47/xx kg C6	Single Point Load Cell-C6 All Capacities			10 ft	2mV/V	\$585
9409 647 07xxx	PR 47/xx kg C3MRE	Single Point Load Cell-C3MRE-All Capacities			10 ft	2mV/V	\$553
9409 647 06xxx	PR 47/xx kg C6E	Single Point Load Cell-C6E - All Capacities			10 ft	2mV/V	\$689
9409 247 0Cxxx	PR 47/xx kg III 5000 S	Single Point Load Cell-NTEP 5000 S - All Capacities			10 ft	2mV/V	\$449

PR 53 - Single Point Load Cell

- Nominal capacity from 10 kg to 100 kg
- Load Cell for single point platforms
- For platform size up to 500mm x 400mm
- Stainless steel construction
- IP66 + IP68 + IP69



Stainless Steel Single Point Load Cell OIML R60, Class C3 = 0.02%, MR (Multi-Range)

Order Number	Type	Description	Signal	Cable	List Price USD
9409 253 07010	PR 53/10 kg C3MR	Single Point Load Cell 10 kg	2mV/V	3.5m	\$1,051
9409 253 07015	PR 53/15 kg C3MR	Single Point Load Cell 15 kg	2mV/V	3.5m	\$1,051
9409 253 07020	PR 53/20 kg C3MR	Single Point Load Cell 20 kg	2mV/V	3.5m	\$1,051
9409 253 07030	PR 53/30 kg C3MR	Single Point Load Cell 30 kg	2mV/V	3.5m	\$1,051
9409 253 07050	PR 53/50 kg C3MR	Single Point Load Cell 50 kg	2mV/V	3.5m	\$1,051
9409 253 07110	PR 53/100 kg C3MR	Single Point Load Cell 100 kg	2mV/V	3.5m	\$1,051
9409 653 07xxx	PR 53/xx kg C3MRE	Single Point Load Cell - C3MRE (All capacities)	2mV/V	3.5m	\$1,149
9409 253 0Cxxx	PR 53/xx kg III 5000S	Single Point Load Cell - NTEP III 5000 S (All Capacities)	2mV/V	3.5m	\$1,051

PR 54 - Single Point Load Cell

- Nominal capacity from 7,5 kg to 200 kg
- Load Cell for single point platforms
- For platform size up to 500mm x 400mm
- Stainless steel construction
- IP66 + IP67



Stainless Steel Single Point Load Cell OIML R60, Class C3 = 0.02%, MR (Multi-Range)

Order Number	Type	Description	Signal	Cable	List Price USD
9409 254 07007	PR 54/7,5 kg C3MR	Single Point Load Cell 7,5 kg	2mV/V	3m	\$563
9409 254 07010	PR 54/10 kg C3MR	Single Point Load Cell 10 kg	2mV/V	3m	\$563
9409 254 07015	PR 54/15 kg C3MR	Single Point Load Cell 15 kg	2mV/V	3m	\$563
9409 254 07020	PR 54/20 kg C3MR	Single Point Load Cell 20 kg	2mV/V	3m	\$563
9409 254 07030	PR 54/30 kg C3MR	Single Point Load Cell 30 kg	2mV/V	3m	\$563
9409 254 07050	PR 54/50 kg C3MR	Single Point Load Cell 50 kg	2mV/V	3m	\$563
9409 254 07110	PR 54/100 kg C3MR	Single Point Load Cell 100 kg	2mV/V	3m	\$563
9409 254 07120	PR 54/200 kg C3MR	Single Point Load Cell 200 kg	2mV/V	3m	\$563
9409 654 07xxx	PR 54/xx kg C3MRE	Single Point Load Cell - C3MRE (All capacities)	2mV/V	3m	\$686
9409 254 0Cxxx	PR 54/xx kg III 5000 S	Single Point Load Cell - NTEP III 5000 S (All capacities)	2mV/V	3m	\$563

PR 55 - Single Point Load Cell

- Nominal capacity from 11kg to 200kg
- Load Cell for single point platforms
- For platform size up to 500mm x 400mm
- EX-version available; standard ATEX/IECEX 2/21
- High Y-value up to 25,000
- IP66 + IP68 + IP69



Stainless Steel platform load cells OILMR60 accuracy class C3 = 2.02%, MR (Multi Range)

Order Number	Type	Description	Signal	Cable	List Price USD
9409 255 07011	PR 55/11 kg C3MR	Single Point Load Cell 11kg	2mV/V	11.5 ft	\$1,033
9409 255 07022	PR 55/22 kg C3MR	Single Point Load Cell 22kg	2mV/V	11.5 ft	\$1,033
9409 255 07050	PR 55/50 kg C3MR	Single Point Load Cell 50kg	2mV/V	11.5 ft	\$1,033
9409 255 07110	PR 55/100 kg C3MR	Single Point Load Cell 100kg	2mV/V	11.5 ft	\$1,033
9409 255 07120	PR 55/200 kg C3MR	Single Point Load Cell 200kg	2mV/V	11.5 ft	\$1,033

9409 655 07xxx	PR 55/xx kg C3MRE	Single Point Load Cell - C3MRE (All capacities)	2mV/V	11.5 ft	\$1,184
9409 255 0Cxxx	PR 55/xx kg III 5000 S	Single Point Load Cell - NTEP III 5000 S (All capacities)	2mV/V	11.5 ft	\$1,033

PR 57 - High Capacity Single Point Load Cell

- Nominal capacity from 300 kg to 500 kg
- Load Cell for single point platforms
- For platform size up to 500mm x 400mm
- Stainless steel construction
- IP66 + IP67



Stainless Steel Single Point Load Cell OIML R60, Class C3 = 0.02%, MR (Multi-Range)

Order Number	Type	Description	Signal	Cable	List Price USD
9409 257 07130	PR 57/300 kg C3MR	High Capacity Single Point Load Cell 300 kg	2.2mV/V	10 ft	\$895
9409 257 07150	PR 57/500 kg C3MR	High Capacity Single Point Load Cell 500 kg	2.2mV/V	10 ft	\$895

9409 657 07xxx	PR 57/xx kg C3MRE	Single Point Load Cell - C3MRE (All capacities)	2.2mV/V	10 ft	\$818
9409 257 0Cxxx	PR 57/xx kg III 5000 S	Single Point Load Cell - NTEP III 5000 S (All capacities)	2.2mV/V	10 ft	\$720

PR 58 - High Capacity Single Point Load Cell

- Nominal capacity from 100 kg to 500 kg
- Load Cell for single point platforms
- For platform size up to 600mm x 600mm
- EX-version available; standard ATEX/IECEX 2/21
- Stainless steel construction
- IP66 + IP68 + IP69



Stainless Steel Single Point Load Cell OIML R60, Class C3 = 0.02%, MR (Multi-Range)

Order Number	Type	Description	Signal	Cable	List Price USD
9409 258 07110	PR 58/100kg C3MR	High Capacity Single Point Load Cell 100 kg	2.2mV/V	11.5 ft	\$1,421
9409 258 07125	PR 58/250kg C3MR	High Capacity Single Point Load Cell 250 kg	2.2mV/V	11.5 ft	\$1,421
9409 258 07150	PR 58/500kg C3MR	High Capacity Single Point Load Cell 500 kg	2.2mV/V	11.5 ft	\$1,421

9409 658 07xxx	PR 58/xx kg C3MRE	Single Point Load Cell - C3MRE (All capacities)	2.2mV/V	11.5 ft	\$1,594
9409 258 0Cxxx	PR 58/xx kg III 5000 S	Single Point Load Cell - NTEP III 5000 S (All capacities)	2.2mV/V	11.5 ft	\$1,420

PR 77 - Beam Type Load Cell

- Nominal capacity from 10 kg to 500 kg
- For platform scales and silo and vessel weighing
- Compatible with other manufacturers
- Stainless steel construction
- IP66 + IP68



Beam type load cell OIML R60, Accuracy Class C3 = 0.02%, MR, NTEP III 5000 S/M, IIL 10000 M

Order Number	Type	Description	Signal	Cable	List Price USD
9409 277 07010	PR 77/10 kg C3MR	Beam type load cell 10 kg	2mV/V	3m	\$470
9409 277 07020	PR 77/20 kg C3MR	Beam type load cell 20 kg	2mV/V	3m	\$470
9409 277 07050	PR 77/50 kg C3MR	Beam type load cell 50 kg	2mV/V	3m	\$470
9409 277 07110	PR 77/100 kg C3MR	Beam type load cell 100 kg	2mV/V	3m	\$470
9409 277 07120	PR 77/200 kg C3MR	Beam type load cell 200 kg	2mV/V	3m	\$470
9409 277 07125	PR 77/250 kg C3MR	Beam type load cell 250 kg	2mV/V	3m	\$470
9409 277 07150	PR 77/500 kg C3MR	Beam type load cell 500 kg	2mV/V	3m	\$470

Beam type load cell OIML R60, Accuracy Class C6 = 0.012%, NTEP III 10000 M, III 5000 S, IIL 10000 M

Order Number	Type	Description	Signal	Cable	List Price USD
9409 277 06050	PR 77/50 kg C6	Beam type load cell 50 kg	2mV/V	3m	\$598
9409 277 06110	PR 77/100 kg C6	Beam type load cell 100 kg	2mV/V	3m	\$598
9409 277 06120	PR 77/200 kg C6	Beam type load cell 200 kg	2mV/V	3m	\$598

9409 677 07xxx	PR 77/xx kg C3MRE	Beam type load cell - C3MRE (All capacities)	2mV/V	3m	\$554
9409 677 06xxx	PR 77/xx kg C6E	Beam type load cell - C6 (50 kg, 100 kg, 200 kg)	2mV/V	3m	\$691

MP 97 - Mounting Kit

- Simple mounting solution for tank and hopper applications
- Material: mild steel, chrome finish
 - Permissible horizontal force:
 - MP 97/00; 2.5KN
 - MP 97/01; 5KN
 - Dummy function; 3KN
 - Permissible lift-off force; 10KN



Accessories for MP 77 and PR 77

Order Number	Type	Description	Height	List Price USD
9405 300 97001	PR 97/00N	PR 97/00N Mini FLEX mounting kit for PR 77, MP 77 up to 250 kg	2.85"	\$373
9405 300 97011	PR 97/01N	PR 97/01N Mini FLEX mounting kit for PR 77, MP 77 500 kg	2.85"	\$431
9405 360 07001	PR 6007/00N	Mounting kit for PR 77, range 10kg ... 200kg	2.95"	\$633
9405 360 07002	PR 6007/00S	Mounting kit for PR 77 range 10kg ... 200kg Stainless Steel	2.95"	\$787

LC Nito® PR 79 - Square Beam Load Cell

- Nominal capacity from 91kg to 5,099t
- For platform scales and silo and vessel weighing
- Compatible with other manufacturers
- EX-version available; standard ATEX/IECEx 2/21
- Stainless steel construction
- IP66 + IP68 + IP69 (91kg: IP66 + IP67)



Beam type load cell OIML R60, Accuracy Class C3 = 0.02%, MR, NTEP III 5000 S/M, IILL 10000 M

Order Number	Type	Description	Signal	Cable	List Price USD
9409 279 07091	PR 79/91 kg C3MR	Beam type load cell 91kg	2mV/V	16 ft	\$488
9409 279 07122	PR 79/227 kg C3MR	Beam type load cell 227kg	2mV/V	16 ft	\$488
9409 279 07145	PR 79/454 kg C3MR	Beam type load cell 454kg	2mV/V	16 ft	\$488
9409 279 07211	PR 79/1134 kg C3MR	Beam type load cell 1134kg	2mV/V	16 ft	\$488
9409 279 07217	PR 79/1760 kg C3MR	Beam type load cell 1760kg	2mV/V	16 ft	\$488
9409 279 07222	PR 79/2268 kg C3MR	Beam type load cell 2268kg	2mV/V	16 ft	\$488

Beam type load cell OIML R60, Accuracy Class C3 = 0.02%, MR, NTEP III 5000 S/M, IILL 10000 M, T-end

Order Number	Type	Description	Signal	Cable	List Price USD
9409 279 17091	PR 79T/91 kg C3MR	Beam type load cell 91kg	2mV/V	16 ft	\$488
9409 279 17122	PR 79T/227 kg C3MR	Beam type load cell 227kg	2mV/V	16 ft	\$488
9409 279 17145	PR 79T/454 kg C3MR	Beam type load cell 454kg	2mV/V	16 ft	\$488
9409 279 17211	PR 79T/1134 kg C3MR	Beam type load cell 1134kg	2mV/V	16 ft	\$488
9409 279 17217	PR 79T/1760 kg C3MR	Beam type load cell 1760kg	2mV/V	16 ft	\$488
9409 279 17222	PR 79T/2268 kg C3MR	Beam type load cell 2268kg	2mV/V	16 ft	\$488
9409 279 17250	PR 79T/5099 kg C3MR	Beam type load cell 5099kg	2mV/V	16 ft	\$801

9409 679 07xxx	PR 79/xx kg C3MRE	Bending Beam Load Cell - C3MRE - All Capacities	2mV/V	16 ft	\$586
9409 677 07xxx	PR 79T/xx kg C3MRE	Bending Beam Load Cell -C3MRE - (91kg - 226kg)	2mV/V	16 ft	\$554
9409 679 17250	PR 79T/5099 kg C3MRE	Bending Beam Load Cell - C3MRE - (5099kg)	2mV/V	16 ft	\$946

Accessories for MP 58(T) / MP 79(T) / PR 79T

Platform Feet and Mounting Kits

Order Number	Type	Description	List Price USD
9405 300 91002	PR 91/00S	PR 91/00S Platform foot for PR 79, MP 58, MP 79 up to 2.268 kg (M12), corrosion resistant	\$142
9405 300 91012	PR 91/01S	PR 91/01S Platform foot for PR 79, MP 79 5.099 kg (M20), corrosion resistant	\$172
9405 300 91004	PR 91T/00S	PR 91T/00S Platform foot for PR 79T, MP 58T, MP 79T up to 2.268 kg (M12), corrosion resistant	\$142
9405 300 91014	PR 91T/01S	PR 91T/01S Platform foot for PR 79T, MP 79T 5.099 kg (M20), corrosion resistant	\$172
9405 300 92001	PR 92/00N	PR 92/00N Mounting kit with elastomer support for PR 79, MP 58, MP 79	\$361
9405 300 95004	PR 95T/00S	PR 95T/00S Maxi FLEX mounting kit for PR 79T, MP 58T, MP 79T up to 2.268 kg, corrosion resistant	\$505
9405 300 95014	PR 95T/01S	PR 95T/01S Maxi FLEX mounting kit for PR 79T, MP 79T 5.099 kg, corrosion resistant	\$721
9405 300 95104	PR 95T/10S	PR 95T/10S Maxi FLEXLOCK mounting kit for PR 79T, MP 58T, MP 79T up to 2.268 kg, corrosion resistant	\$938
9405 300 95114	PR 95T/11S	PR 95T/11S Maxi FLEXLOCK mounting kit for PR 79T, MP 79T, 5.099 kg, corrosion resistant	\$1,155
9405 300 98002	PR 98/00S	PR 98/00S Spacer for PR 79, PR 79T and MP 79, MP 79T up to 2.268 kg	\$71
9405 300 98012	PR 98/01S	PR 98/01S Spacer for PR 79, PR 79T and MP 79, MP 79T, 5.099 kg	\$86

Tigo- PR 76 - Tension S-Type Load Cell

Nominal capacity range from 60 kg to 5 t
 Robust tension load cell with high accuracy and linearity
 Stainless Steel
 IP67



Tension S-Type Load Cell, Stainless Steel, OIML R60 Class N = 0.03%

Order Number	Type	Description	Signal	Cable	List Price USD
9409 276 01060	PR 76/60kg N	PR 76/60kg N S-Type Load Cell 60kg	2mV/V	5m	\$650
9409 276 01112	PR76/125kgN	PR 76/125kg N S-Type Load Cell 125kg	2mV/V	5m	\$650
9409 276 01125	PR 76/250kg N	PR 76/250kg N S-Type Load Cell 250kg	2mV/V	5m	\$650
9409 276 01150	PR 76/500kg N	PR 76/500kg N S-Type Load Cell 500kg	2mV/V	5m	\$650
9409 276 01210	PR 76/1000kg N	PR 76/1000kg N S-Type Load Cell 1t	2mV/V	5m	\$650
9409 276 01220	PR 76/2000kg N	PR 76/2000kg N S-Type Load Cell 2t	2mV/V	5m	\$720
9409 276 01230	PR 76/3000kg N	PR 76/3000kg N S-Type Load Cell 3t	2mV/V	5m	\$802
9409 276 01250	PR 76/5000kg N	PR 76/5000kg N S-Type Load Cell 5t	2mV/V	5m	\$802

Tension S-Type Load Cell, Stainless Steel, OIML R60 Class C3 = 0.025%

Order Number	Type	Description	Signal	Cable	List Price USD
9409 276 03060	PR 76/60kg C3	PR 76/60kg C3 S-Type Load Cell 60kg	2mV/V	5m	\$678
9409 276 03112	PR 76/125kg C3	PR 76/125kg C3 S-Type Load Cell 125kg	2mV/V	5m	\$678
9409 276 03125	PR 76/250kg C3	PR 76/250kg C3 S-Type Load Cell 250kg	2mV/V	5m	\$678
9409 276 03150	PR 76/500kg C3	PR 76/500kg C3 S-Type Load Cell 500kg	2mV/V	5m	\$678
9409 276 03210	PR 76/1000kg C3	PR 76/1000kg C3 S-Type Load Cell 1t	2mV/V	5m	\$678
9409 276 03220	PR 76/2000kg C3	PR 76/2000kg C3 S-Type Load Cell 2t	2mV/V	5m	\$746
9409 276 03230	PR 76/3000kg C3	PR 76/3000kg C3 S-Type Load Cell 3t	2mV/V	5m	\$831
9409 276 03250	PR 76/5000kg C3	PR 76/5000kg C3 S-Type Load Cell 5t	2mV/V	5m	\$831



PR 76 - Accessories Swivel Bearings

Order Number	Type	Description	Height	List Price USD
9405 300 96001	PR 96/00N	PR 96/00N Swivel bearing for PR 76 60 kg up to 500 kg	2.1 inch	\$71
9405 300 96011	PR 96/01N	PR 96/01N Swivel bearing for PR 76 1t up to 5t	2.1 inch	\$86

Cable Junction Boxes




Order Number	Type	Description	Dimensions	Material	Shipping Weight lb.	List Price USD
			Inches			
9405 361 30084	PR6130/08	PR 6130/08 Cable junction box, for 8 load cells, polycarbonate	7.9 x 4.8 x 3.0	Poly-Carb	1.9	\$267
9405 361 30044	PR6130/04N	PR 6130/04N Cable junction box, for 4 load cells, aluminum, IP67	6.9 x 3.2 x 3.0	Aluminum	3.0	\$572
9405 361 30344	PR6130/34Sa	PR 6130/34Sa Cable junction box, for 4 load cells, stainless steel, W&M, IP68&69k	7.5 x 6.3 x 1.4	Stainless Stl	3.0	\$798
9405 361 30354	PR6130/35S	PR 6130/35S Cable junction box, for 4 load cells, stainless steel, W&M, IP68&69k, small design	4.1 x 6.8 x 1.9	Stainless Stl	3.0	\$867
9405 361 30384	PR6130/38S	PR 6130/38S Cable junction box, for 8 load cells, stainless steel, W&M, IP68&69k	9.0 x 6.0 x 2.3	Stainless Stl	3.7	\$983



Cable Junction Boxes EX Approved (ATEX Zone 1/21 and 2/22, cFMus Class I, II, III Div. 1 and Class I, II, III Div. 2)

Order Number	Type	Description	Dimensions Inches	Material	Shipping Weight lb.	List Price USD
9405 361 30644	PR6130/64Sa	PR 6130/64Sa Cable junction box, for 4 load cells, stainless steel, Ex, W&M, IP68&69k	7.5 x 6.3 x 1.4	Stainless Stl	3.7	\$857
9405 361 30654	PR6130/65S	PR 6130/65S Cable junction box, for 4 load cells, stainless steel, Ex, W&M, IP68&69k, small design	4.1 x 6.8 x 1.9	Stainless Stl	3.0	\$929
9405 361 30684	PR6130/68S	PR 6130/68S Cable junction box, for 8 load cells, stainless steel, Ex, W&M, IP68&69k	9.0 x 6.0 x 2.3	Stainless Stl	3.7	\$1,054

Temperature range: -4F- 158F
 Material: ABS
 Protection Class: IP65

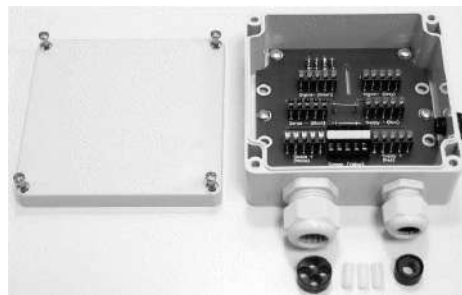

MP 90- Cable Junction Box

Order Number	Type	Description	Dimensions Inches	Material	Shipping Weight	List Price USD
9408 800 90044	MP 90/04	MP 90/04 Cable junction box, for 4 load cells, ABS	4.8 x 4.7 x 2.16	ABS	1.33 lbs.	\$194

Installation Cable

Order Number	Type	Description	Length		Shipping Weight lb.	List Price USD
			m	ft.		
U1-PR6135	PR6135/FT	Extension Cable	-	per ft.	0.12/ft.	\$6
9405 361 35112	PR6135/11	PR 6135/11 Installation cable, 10 m ring	10	33	4.0	\$178
9405 361 35212	PR6135/21	PR 6135/21 Installation cable, 20 m ring	20	65	8.4	\$336
9405 361 35312	PR6135/31	PR 6135/31 Installation cable, 30 m ring	30	98	11.5	\$496
9405 361 35512	PR6135/51	PR 6135/51 Installation cable, 50 m ring	50	164	18.1	\$778
9405 361 35122	PR6135/12	PR 6135/12 Installation cable, 100 m ring	100	328	28.7	\$1,532
9405 361 35322	PR6135/32	PR 6135/32 Installation cable, 300 m drum	300	984	95.6	\$4,523
9405 361 35019	PR6135/01A	PR 6135/01A Armored installation cable, price per ft.	-	per ft.	0.12/ft.	\$7

Extended Cables for Load Cell

Available for all PRxx (not PR6207) Limited for PacCake(see below)

Order Number	Type	Description	Length		Shipping Weight lb.	List Price USD
			m	ft.		
LC Cable 12	LC Cable (5-12)	Cable - replace 5m (16ft) with 12m	12	39	-	\$160
LC Cable 20	LC Cable (5-20)	Cable - replace 5m (16ft) with 20m	20	65	-	\$160
LC Cable PanCake	LC Cable (12-20)	Cable - replace 12m (39ft) with 20m	20	65	-	\$160
LC Cable (HT) 12	LC Cable HT 12	Cable Extension High Temp- 12m (39ft)	12	39	-	\$481
LC Cable (HT) 15	LC Cable HT 15	Cable Extension High Temp- 15m (49ft)	15	49	-	\$561
LC Cable (HT) 20	LC Cable HT 20	Cable Extension High Temp- 12m (65ft)	20	65	-	\$696

Load Cell Tags

Order Number	Type	Description	PER PIECE	List Price USD
1P - per piece	Paper Tags - 1P	1 - 5 pcs.		\$37
2P - per piece	Paper Tags - 2P	6 - 20 pcs.		\$28
3P - per piece	Paper Tags - 3P	21 - 50 pcs.		\$19
4P - per piece	Paper Tags - 4P	51 pcs. and more		\$10
9405 361 39009	Metal Tags - 1M	from 6 pcs.; 70mm x 20mm, up to 2 lines with 12 character. each, material 1.4571		\$77



Metal Tags Sample

Maxxis 5 - Preconfigured



Order Number	Type	Description	List Price USD
9405 159 00001	PR5900/00	PR 5900/00 Maxxis 5 Process Controller - Panel housing (G1), A/D converter(W1), 110/230V (L0), Basic Application (H0), Digital Input passive (DE1)	\$3,476
9405 159 00011	PR5900/01	PR 5900/01 Maxxis 5 Process Controller - Panel housing (G1), A/D converter(W1), 24V (L8), Basic Application (H0) Digital Input passive (DE1)	\$3,786
9405 159 00221	PR5900/22	PR 5900/22 Maxxis 5 Process Controller - Table top housing (G2), Rear plate cable glands (L12), A/D converter (W1), 110/230V (L0), Basic Application (H0), Digital Input passive (DE1), Power cable with USA plug(US)	\$4,406
9405 159 00231	PR5900/23	PR 5900/23 Maxxis 5 Process Controller - Housing with bracket (G3), Rear plate cable glands (L12), A/D converter(W1), 110/230V (L0), Basic Application (H0) Digital Input passive (DE1), Power cable with USA plug(US)	\$4,406
9405 159 00241	PR5900/24	PR 5900/24 Maxxis 5 Process Controller - Panel housing (G1), 110/230V (L0), Basic Application (H0), Digital Input passive (DE1), Power cable with USA plug(US)	\$3,078
9405 159 00271	PR5900/27	PR 5900/27 Maxxis 5 Process Controller - Housing with bracket (G3), Rear plate cable glands (L12), A/D Converter (W1), 110/230V (L0), Basic Application (H0), FM Approval Class I,II,III Div. 2 (Y3), Digital Input passive (DE1), USA Power cable	\$4,629
9405 159 00281	PR5900/28	PR 5900/28 Maxxis 5 Process Controller - Panel housing (G1), 24V (L8), Basic Application (H0), FM Approval Class I,II,III Div. 2 (Y3), Digital Input passive (DE1), USA Power cable	\$4,010
9405 159 00291	PR5900/29	PR 5900/29 Maxxis 5 - Blackbox housing (G4), 110/230V (L0), Basic application (H0), Digital Input passive (DE1), Serial interface RS485 (B15), Serial interface RS485 (B25), Fieldbus interface Profibus-DP (C21)	\$4,629

Maxxis 5 Accessories - field installable - shipped separately

Order Number	Type	Description	List Price USD
9405 359 00101	PR5900/10	PR 5900/10 A/D Converter	\$403
9405 359 00321	PR5900/32	PR 5900/32 Interface Card -Serial 2 x RS232	\$496
9405 359 00041	PR5900/04	PR 5900/04 Interface Card -Serial 2 x RS485 (incl. supply for IS Platform)	\$464
9405 359 00071	PR5900/07	PR 5900/07 Interface Card - Analog 1x Input /1x Output 0/4-20 mA	\$418
9405 359 00121	PR5900/12	PR 5900/12 Interface Card - Digital 4x Input (passive) / 4x Output (Relay)	\$333
9405 359 00131	PR5900/13	PR 5900/13 Interface Card - Digital 4x Input (active) / 4x Output (Relay)	\$333
9405 359 00171	PR5900/17	PR 5900/17 Interface Card - Digital 6x Input (passive) / 8x Output (optocoupler)	\$466
9405 317 21511	PR1721/51	PR 1721/51 Interface Card - Profibus DP	\$931
9405 317 21541	PR1721/54	PR 1721/54 Interface Card - Device Net	\$931
9405 317 21551	PR1721/55	PR 1721/55 Interface Card - CC-Link	\$1,450
9405 317 21761	PR1721/76	PR 1721/76 Interface Card - Profinet	\$1,082
9405 317 21771	PR1721/77	PR 1721/77 Interface Card - Ethernet/IP	\$1,082
9405 352 30301	PR5230/30	PR 5230/30 Ethernet female connector RJ45, IP65	\$222
9405 352 30311	PR5230/31	PR 5230/31 Ethernet cable with cable glance, 7m, RJ45 plug, Industrial Material	\$128
9405 359 00411	PR5900/41	PR 5900/41 Serial Cable with cable glands (9 pin D-Sub plug male)	\$188
9405 359 00421	PR5900/42	PR 5900/42 Serial Cable with cable glands (9 pin D-Sub plug female)	\$188
9405 359 00431	PR5900/43	PR 5900/43 Serial Cable with cable glands (12 pin round plug male)	\$188
9405 359 00441	PR5900/44	PR 5900/44 Serial Cable with cable glands (12 pin round plug female)	\$188
9405 359 00601	PR5900/60	PR 5900/60 EX Remote Terminal for Maxxis 5, with Panel Housing (YPSC* Power Supply needed)	\$3,332
9405 359 00701	PR5900/70	PR 5900/70 EX Remote Terminal for Maxxis 5, with Table Top Housing (YPSC* Power Supply needed)	\$4,334
9405 359 00811	PR5900/81	PR 5900/81 PHASE Application License (incl. OPC license)	\$661
9405 359 00831	PR5900/83	PR 5900/83 BATCHING Application License	\$661
9405 359 00841	PR5900/84	PR 5900/84 TRUCK Application License (incl. Alibi memory license)	\$375
9405 359 00861	PR5900/86	PR 5900/86 IBC - One Component Filling License	\$388
9405 359 00871	PR5900/87	PR 5900/87 Tilt Correction License (Software Basic)	\$388
9405 359 00911	PR5900/91	PR 5900/91 Alibi Memory License (Only for BASIC, IBC, COUNT and TRUCK)	\$388
9405 359 00921	PR5900/92	PR 5900/92 OPC Server License (incl. AccessIT 2.0 license)	\$388
9405 359 00931	PR5900/93	PR 5900/93 Special License "Batch Modes" for use in Programming	\$234

Build To Order - Maxxis 5 Process Controller

Programmable Process Controller
 Simple Integration into automation systems
 Ethernet ICP/IP for PC Connection via OPC server and for configuration with browser
 Diverse options for extending the functionality
 Individual application software on request
 FM Approved Class I, II, III Div 2



Order Number	Type	Description	List Price USD
9405 159 00000	Maxxis 5	Maxxis 5 Process Controller includes Ethernet TCP/IP, RS232/485/422, USB, SD Card, digital 4x In / 4x Outputs	\$3,078

Build To Order - Options for Maxxis 5

Order Number	Description	Slot A / B	List Price USD
W1 or W2	W1 A/D Converter	A or B	\$401
X3 / X4	X3 Disconnectable Load cell Connection	A or B	\$216
DE1	DE1 Standard 4x Digital Input Passive (external 24V supply needed)	Standard	\$0
DE2	DE2 Standard 4x Digital Input Active (internal 12V supply)		\$49
L0	L0 110/ 240V AC Power Supply	Standard	\$0
L8	L8 24V DC Power Supply		\$307
G1	G1 Maxxis 5 in Panel Housing	Standard	\$0
G2	G2 Maxxis 5 in Table Top Housing		\$923
G3	G3 Maxxis 5 in Housing with U-Bracket for wall mounting (turned front)		\$923
G4	G4 Maxxis 5 in Blackbox Housing (no Y2/Y3)		\$-307
L12	L12 Backplate with cable glands (Only with Option G2 or G3)		\$0
L13	L13 Backplate with EzEntry and cable glands (no Y2/Y3), (Only with Option G2 or G3)		\$232
US	US Cable for power supply for USA, Typ LAP31 (Only with Option G2 or G3)		\$0
EU	EU Cable for power supply with Europlug, Typ CEE7 (Only with Option G2 or G3)		\$0
GB	GB Cable for power supply for GB, Typ 360 (Only with Option G2 or G3)		\$0
N31	N31 Cable for power supply 24V without connector (open ended), (Only with Option G2 or G3)		\$0

Maxxis 5- Options- additional interface cards

		Slot A / B / FB	
B14 or B24	B14 Interface Card -Serial 2 x RS232	0 / 0 / -	\$493
B15 or B25	B15 Interface Card - Serial 2 x RS485 for Maxxis 5 (incl. supply for IS Platform)	0 / 0 / -	\$462
B16 or B26	B16 Interface Card - Analog 1x Input /1x Output 0/4-20 mA	0 / 0 / -	\$416
B17 or B27	B17 Interface Card - Digital 4x Input (active) / 4x Output (Relay)	0 / 0 / -	\$331
B18 or B28	B18 Interface Card - Digital 4x Input (passive) / 4x Output (Relay)	0 / 0 / -	\$331
B19 or B29	B19 Interface Card - Digital 6x Input (passive) / 8x Output (optocoupler)	0 / 0 / -	\$464
C21	C21 Interface Card - Profibus DP	- / - / 0	\$926
C24	C24 Interface Card - Device Net	- / - / 0	\$926
C25	C25 Interface Card - CC-Link	- / - / 0	\$1,443
C26	C26 Interface Card - Profinet	- / - / 0	\$1,077
C27	C27 Interface Card - Ethernet/IP	- / - / 0	\$1,077

Maxxis 5- Approvals

Y2	Y2 Zone 2/22 ATEX Approval		\$222
Y3	Y3 FM Approval Class I, II, III Div. 2 (With option L0 only up to 130 VAC Power Supply)		\$222

Maxxis 5 Options- Applications			
Order Number	Description		List Price USD
H0	H0 BASIC Application (For W&M use)	Standard	\$0
I4	I4 PHASE Application License (incl. OPC license)		\$658
I5	I5 COUNT Application License		\$373
I6	I6 BATCHING Application License		\$658
I8	I8 TRUCK Application License (incl. Alibi memory license), (For W&M use)		\$373
I11	I11 IBC - One Component Filling License (For W&M use)		\$387
I12	I12 Tilt Correction Lizenz (Software Basic)		\$387
E5	E5 Alibi Memory License (Only for BASIC, IBC, COUNT and TRUCK)		\$387
E6	E6 OPC Server License (incl. AccessIt 2.0 license)		\$387
E9	E9 Special License "Batch Modes" for use in Programming		\$232

Options for Maxxis 5							
Cable with cable glands	Built In RS232	Built In RS485	Slot 1		Slot 2		List Price USD
			1. RS485	2. RS485	1. RS485	2. RS485	
M16 Serial Cable with cable glands (9 pin D-Sub plug male), 6m	M16	M80	M76	M85	M78	M90	\$187
M17 Serial Cable with cable glands (9 pin D-Sub plug female), 6m	M17	M81	M77	M86	M79	M91	\$187
M18 Serial Cable with cable glands (12 pin round plug male), 6m	M18	M74	M61	M63	M66	M68	\$187
M19 Serial Cable with cable glands (12 pin round plug female), 6m	M19	M75	M62	M64	M67	M69	\$187

Options - Connectors for Maxxis 5 (Option G2 or G3 Only)							
Cable for integrated Ethernet	Built In Ethernet						List Price USD
M39 Ethernet female connector RJ45, IP66 (not for option Y2 or Y3)	M39						\$222
M40 Ethernet cable with cable glance, RJ45 plug, 7m	M40						\$127

Cable for integrated USB							List Price USD
N29	N29 USB connector female USB Typ A (not for option Y2 or Y3)						\$222
N30	N30 USB cable for YBR05* Scanner						\$127

Maxxis 5- Options for (EX) Remote Terminal			
CX1	CX1 Connection to Maxxis 5 (Ex) Remote Terminal		\$154

Maxxis 4 Process Controller



Maxxis 4 - Preconfigured			
Order Number	Type	Description	List Price USD
9405 155 00001	PR5500/00	PR 5500/00 Maxxis 4, A/D converter (W1), 110/230V (L0), Basic Application (H0), Cable anchorage (L14), Mounting frame (L15)	\$3,024
9405 155 00011	PR5500/01	PR 5500/01 Maxxis 4, A/D converter (W1), 24V (L8), Basic Application (H0), Cable anchorage (L14), Mounting frame (L15)	\$3,331
9405 155 00201	PR5500/20	PR 5500/20 Maxxis 4, A/D converter (W1), 110/230V (L0), 6/8 digital I/O (B19), Batching Application (I6), Cable anchorage (L14), Mounting frame (L15)	\$4,152
9405 155 00211	PR5500/21	PR 5500/21 Maxxis 4, A/D converter (W1), 24V (L8), 6/8 digital I/O (B19), Batching Application (I6), Cable anchorage (L14), Mounting frame (L15)	\$4,462
9405 155 00301	PR5500/30	PR 5500/30 Maxxis 4, A/D converter (W1), 110/230V (L0), 6/8 digital I/O (B19), IBC Application (I11), Cable anchorage (L14), Mounting frame (L15)	\$3,880
9405 155 00311	PR5500/31	PR 5500/31 Maxxis 4, A/D converter (W1), 24V (L8), 6/8 digital I/O (B19), IBC Application (I11), Cable anchorage (L14), Mounting frame (L15)	\$4,185
9405 155 00901	PR5500/90	PR 5500/90 Maxxis 4, A/D converter (W1), 110/230V (L0), Phase Application (I4), Cable anchorage (L14), Mounting frame (L15)	\$3,685
9405 155 00941	PR5500/94	PR 5500/94 Maxxis 4, A/D converter(W1), 24V (L8), Phase Application (I4), Cable anchorage (L14), Mounting frame (L15)	\$3,992
9405 155 00121	PR 5500/Maxxis 4 NTEP V1	Maxxis 4 - USA Truck Version Maxxis 4 Process Controller A/D Converter (W1), 110/230V (L0), Basic Application (H0), Dual RS-232 Slot 1 (B14), Digital outputs (Passive) Slot 2 (B28), Mounting frame for safe inst. (L15), NTEP Label, Mark & Sealing (F4)	\$3,824

Maxxis 4 Accessories - field installable - shipped separately

Order Number	Type	Description	List Price USD
9405 355 00101	PR5500/10	PR 5500/10 A/D Converter	\$403
9405 355 00321	PR5500/32	PR 5500/32 Interface Card -Serial 2 x RS232	\$496
9405 355 00041	PR5500/04	PR 5500/04 Interface Card -Serial 2 x RS485 (incl. supply for IS Platform)	\$464
9405 355 00071	PR5500/07	PR 5500/07 Interface Card - Analog 1x Input /1x Output 0/4-20 mA	\$449
9405 355 00121	PR5500/12	PR 5500/12 Interface Card - Digital 4x Input (passive) / 4x Output (Relay)	\$309
9405 355 00131	PR5500/13	PR 5500/13 Interface Card - Digital 4x Input (active) / 4x Output (Relay)	\$309
9405 355 00171	PR5500/17	PR 5500/17 Interface Card - Digital 6x Input (passive) / 8x Output (optocoupler)	\$466
9405 317 21611	PR1721/61	PR 1721/61 Interface Card - Profibus DP	\$931
9405 317 21641	PR1721/64	PR 1721/64 Interface Card - Device Net	\$931
9405 317 21651	PR1721/65	PR 1721/65 Interface Card - CC-Link	\$1,450
9405 317 21761	PR1721/76	PR 1721/76 Interface Card - Profinet	\$1,082
9405 317 21771	PR1721/77	PR 1721/77 Interface Card - Ethernet/IP	\$1,082
9405 355 00811	PR5500/81	PR 5500/81 PHASE Application License (incl. OPC license) for Maxxis 4	\$661
9405 355 00831	PR5500/83	PR 5500/83 BATCHING Application License for Maxxis 4	\$661
9405 355 00861	PR5500/86	PR 5500/86 IBC - One Component Filling License for Maxxis 4	\$388
9405 355 00871	PR5500/87	PR 5500/87 Tilt Correction License (Software Basic) for Maxxis 4	\$388
9405 355 00921	PR5500/92	PR 5500/92 OPC Server License (incl. AccessIt 2.0 license) for Maxxis 4	\$388
9405 355 00931	PR5500/93	PR 5500/93 Special License "Batch Modes" for use in Programming for Maxxis 4	\$234
9405 355 00191	PR5500/19	Adaptor mounting kit to convert X5 slot for Maxxis 4 and X3	\$986
9405 316 20101	PR1620/10	PR 1620/10 Housing (stainless steel) for X3,Maxxis 4 and CSD-912 (incl. Wall Mounting bracket)	\$685
9405 318 99981	PR1899/98	PR 1899/98 W&M label NTEP for Maxxis 4 incl. label, calibration mark and sealing	\$71

MTL Kit for Ex applications

Order Number	Type	Description	List Price USD
MTL-KIT	MTL-KIT	FM approved load cell barrier	\$1,597

Maxxis 4 Process Controller- Build to Order

Order Number	Type	Description	List Price USD
9405 155 00000	Maxxis 4	Maxxis 4 Process Controller includes Ethernet TCP/IP, RS232/485/422, USB, SD Card	\$2,501

Build To Order - Options for Maxxis 4

Order Number	Description	Slot 1 / 2	List Price USD
Slot 1 / 2			
W1	W1 A/D Converter	0 / 0	\$401
L0	L0 110/ 240V AC Power Supply	Standard	\$0
L8	L8 24V DC Power Supply		\$307
B14 or B24	B14 Interface Card -Serial 2 x RS232	slot 1 or 2	\$493
B15 or B25	B15 Interface Card - Serial 2 x RS485 (incl. supply for IS Platform)	slot 1 or 2	\$462
B16 or B26	B16 Interface Card - Analog 1x Input /1x Output 0/4-20 mA	slot 1 or 2	\$447
B17 or B27	B17 Interface Card - Digital 4x Input (active) / 4x Output (Relay)	slot 1 or 2	\$307
B18 or B28	B18 Interface Card - Digital 4x Input (passive) / 4x Output (Relay)	slot 1 or 2	\$307
B19 or B29	B19 Interface Card - Digital 6x Input (passive) / 8x Output (optocoupler)	slot 1 or 2	\$464

Build To Order - Options for Maxxis 4

Order Number	Description	Slot 1 / 2	List Price USD
Slot 1 / 2			
C21	C21 Interface Card - Profibus DP	0 / -	\$926
C24	C24 Interface Card - Device Net	0 / -	\$926
C25	C25 Interface Card - CC-Link	0 / -	\$1,443
C26	C26 Interface Card - Profinet	0 / -	\$1,077
C27	C27 Interface Card - Ethernet/IP	0 / -	\$1,077
H0	H0 BASIC Application (For W&M use)	Standard	\$0
I4	I4 PHASE Application License (incl. OPC license)		\$658
I6	I6 BATCHING Application License		\$658
I11	I11 IBC - One Component Filling License (For W&M use)		\$387
I12	I12 Tilt Correction Lizenz (Software Basic)		\$387
E5	E5 Alibi Memory License (Only for BASIC and IBC))		\$387
E6	E6 OPC Server License (incl. AccessIt 2.0 license)		\$387
E9	E9 Special License "Batch Modes" for use in Programming		\$232
F4	F4 W&M label NTEP for Maxxis 4		\$70



X3 Process Indicator



Order Number	Type	Description	Shipping Weight lb.	List Price USD
9405 154 10003	PR5410/00	PR 5410/00 X3 Process Indicator 110/230 VAC	5.1	\$2,261
9405 154 10013	PR5410/01	PR 5410/01 X3 Process Indicator 24V DC	5.1	\$2,616
9405 154 10033	PR5410/03	X3 Process Indicator 24V DC - ATEX Zone 2/22	5.1	\$2,792
9405 154 10043	PR5410/04	PR 5410/04 X3 Process Indicator 24 V DC with UL approval	5.1	\$2,616

X3 Hardware Accessories - field installable - shipped separately

Order Number	Type	Description	Shipping Weight lb.	List Price USD
9405 355 10023	PR5510/02	PR 5510/02 X4 and X3 - Serial Interface 2 X RS232	0.1	\$496
9405 355 10043	PR5510/04	PR 5510/04 X4 and X3 - Serial interface RS232 / RS 485	0.1	\$508
9405 355 10051	PR 5510/05	PR 5510/05 X4 and X4 - Interface Card CAN-Bus	0.1	\$501
9405 355 10073	PR5510/07	PR 5510/07 X4 and X3 - Analog I/O's 4 In / 1Out	0.1	\$937
9405 355 10083	PR5510/08	PR 5510/08 X4 and X3 -BCD interface open emitter	0.1	\$428
9405 355 10093	PR5510/09	PR 5510/09 X4 and X3 -BCD interface open collector	0.4	\$428
9405 355 10123	PR5510/12	PR 5510/12 X4 and X3 -Control I/O's 6/12 Opto	0.1	\$550
9405 317 21313	PR1721/31	PR 1721/31 X3 and X4 - Profibus DP Interface Card	0.1	\$1,014
9405 317 21343	PR1721/34	PR 1721/34 X3 and X4 - Device Net Interface Card	0.3	\$1,014
9405 317 21353	PR1721/35	PR 1721/35 X3 and X4 - CC-Link Interface Card	0.3	\$1,514
9405 317 21363	PR1721/36	PR 1721/36 X3 and X4 - Profinet Interface Card	0.3	\$1,187
9405 317 21373	PR1721/37	PR 1721/37 X3 and X4 - Ethernet/IP Interface Card	0.3	\$1,187
9405 355 00191	PR5500/19	Adaptor mounting kit to convert X5 slot for Maxxis 4 and X3	12.9	\$986
9405 316 20101	PR1620/10	PR 1620/10 Housing (stainless steel) for X3,Maxxis 4 and CSD-912 (incl. Wall Mounting bracket)	1.0	\$685
9405 318 99971	PR1899/97	PR 1899/97 W&M label NTEP for X3 incl. label, calibration mark and sealing	1.0	\$71

PR 5110 Remote Displays



Remote Displays and Terminals In Push-In Housing

Order Number	Type	Description	Shipping Weight lb.	List Price USD
9405 351 10001	PR5110/00	PR 5110/00 Remote Display, Panel Mount, 110/240V	5.0	\$1,616
9405 351 10011	PR5110/01	PR 5110/01 Remote Display, Panel Mount, 24V	5.0	\$1,842
9405 351 10101	PR5110/10	PR 5110/10 Remote Display, IP 65 Housing, 110/240V	5.0	\$1,842
9405 351 10111	PR5110/11	PR 5110/11 Remote Display, IP 65 Housing, 24V	5.0	\$2,074

Remote Displays and Terminals Atex Only

Order Number	Type	Description	4,409 Weight lb.	List Price USD
9405 351 10601	PR5110/60	PR 5110/60 Intrinsically Safe Remote Display, Panel Mount, 12V for Ex Zone 1/21	5.0	\$2,304
9405 351 10701	PR5110/70	PR 5110/70 Intrinsically Safe Remote Display, IP 65 Housing, 12V for Ex Zone 1/21	5.0	\$2,536

Weight Indicator X2

- 110VAC and 24vDC
- easy and reliable solution for process vessel scales
- fast and precise weighing results
- 3 digital inputs and 3 outputs for limit function
- Support of most common fieldbuses
- Table top and panel housing



Weight Indicator X2 - Panel housing

Order Number	Type	Description	Price in USD
9405 153 10011	PR 5310/01	PR 5310/01 X2 Weight Indicator- Panel Mount 24V DC -3 Digital Inputs and 3 Outputs for limit function	\$ 1,448
9405 153 10211	PR 5310/21	PR 5310/21 X2 Weight Indicator- Panel Mount- Analog output, 24V DC - 3 Digital Inputs and 3 Outputs for limit function	\$ 1,569
9405 153 10241	PR 5310/24	PR 5310/24 X2 Weight Indicator- Panel Mount-Profibus & Analog output, 24V DC- 3 Digital Inputs and 3 Outputs for limit function	\$ 1,690
9405 153 10411	PR 5310/41	PR 5310/41 X2 Weight Indicator- Panel Mount-Profibus, 24V DC - 3 Digital Inputs and 3 Outputs for limit function	\$ 1,569
9405 153 10611	PR 5310/61	PR 5310/61 X2 Weight Indicator- Panel Mount-Device Net, 24V DC - 3 Digital Inputs and 3 Outputs for limit function	\$ 2,474
9405 153 10811	PR 5310/81	PR 5310/81 X2 Weight Indicator- Panel Mount-Ethernet/IP, 24V DC - 3 Digital Inputs and 3 Outputs for limit function	\$ 2,294
9405 153 10841	PR 5310/84	PR 5310/84 X2 Weight Indicator- Panel Mount-Profinet, 24V DC - 3 Digital Inputs and 3 Outputs for limit function	\$ 2,294
9405 153 10001	PR 5310/00	X2 Weight Indicator- Panel Mount 110-230VAC-3 Digital Inputs and 3 Outputs for limit function	\$ 1,448
9405 153 10201	PR 5310/20	X2 Weight Indicator- Panel Mount- Analogue output, 100-230VAC - 3 Digital Inputs and 3 Outputs for limit function	\$ 1,569
9405 153 10231	PR 5310/23	X2 Weight Indicator- Panel Mount-Profibus & Analogue output, 110-230VAC-- 3 Digital Inputs and 3 Outputs for limit function	\$ 1,690
9405 153 10401	PR 5310/40	X2 Weight Indicator- Panel Mount-Profibus, 110-230VAC-- 3 Digital Inputs and 3 Outputs for limit function	\$ 1,569
9405 153 10601	PR 5310/60	X2 Weight Indicator- Panel Mount-DeviceNet, 110-230VAC- - 3 Digital Inputs and 3 Outputs for limit function	\$ 2,474
9405 153 10801	PR 5310/80	X2 Weight Indicator- Panel Mount-Ethernet/IP, 110-230VAC- - 3 Digital Inputs and 3 Outputs for limit function	\$ 2,294
9405 153 10831	PR 5310/83	X2 Weight Indicator- Panel Mount-Profinet, 110-230VAC- - 3 Digital Inputs and 3 Outputs for limit function	\$ 2,294



Weight Indicator X2 - Table top housing

Order Number	Type	Description	Price in USD
9405 153 10111	PR 5310/11	PR 5310/11 X2 Weight Indicator- Table top housing - 24V DC - 3 Digital Inputs and 3 Outputs for limit function	\$ 1,810
9405 153 10311	PR 5310/31	PR 5310/31 X2 Weight Indicator- Table top housing - Analog output, 24V DC - 3 Digital Inputs and 3 Outputs for limit function	\$ 1,931
9405 153 10341	PR 5310/34	PR 5310/34 X2 Weight Indicator- Table top housing - Profibus & Analog output, 24V DC - 3 Digital Inputs and 3 Outputs for limit function	\$ 2,052
9405 153 10511	PR 5310/51	PR 5310/51 X2 Weight Indicator- Table top housing - Profibus, 24V DC - 3 Digital Inputs and 3 Outputs for limit function	\$ 1,931
9405 153 10711	PR 5310/71	PR 5310/71 X2 Weight Indicator- Table top housing - Device Net, 24V DC - 3 Digital Inputs and 3 Outputs for limit function	\$ 2,836
9405 153 10911	PR 5310/91	PR 5310/91 X2 Weight Indicator- Table top housing - Ethernet/IP, 24V DC - 3 Digital Inputs and 3 Outputs for limit function	\$ 2,656
9405 153 10941	PR 5310/94	PR 5310/94 X2 Weight Indicator- Table top housing - Profinet, 24V DC - 3 Digital Inputs and 3 Outputs for limit function	\$ 2,553
9405 153 10101	PR 5310/10	X2 Weight Indicator- Table top housing - 110-230VAC- - 3 Digital Inputs and 3 Outputs for limit function	\$ 1,810
9405 153 10301	PR 5310/30	X2 Weight Indicator- Table top housing - Analogue output, 110-230VAC- - 3 Digital Inputs and 3 Outputs for limit function	\$ 1,931
9405 153 10331	PR 5310/33	X2 Weight Indicator- Table top housing - Profibus & Analogue output, 110-230VAC-- 3 Digital Inputs and 3 Outputs for limit function	\$ 2,052
9405 153 10501	PR 5310/50	X2 Weight Indicator- Table top housing - Profibus, 110-230VAC- - 3 Digital Inputs and 3 Outputs for limit function	\$ 1,931
9405 153 10701	PR 5310/70	X2 Weight Indicator- Table top housing - DeviceNet, 110-230VAC- - 3 Digital Inputs and 3 Outputs for limit function	\$ 2,836
9405 153 10901	PR 5310/90	X2 Weight Indicator- Table top housing - Ethernet/IP, 110-230VAC- - 3 Digital Inputs and 3 Outputs for limit function	\$ 2,656
9405 153 10931	PR 5310/93	X2 Weight Indicator- Table top housing - Profinet, 110-230VAC- - 3 Digital Inputs and 3 Outputs for limit function	\$ 2,553



Weight Indicator X2 - Accessories

9405 353 10991	PR 5310/99	PR 5310/99 X2 Wall mounting Bracket	\$ 93
----------------	------------	-------------------------------------	-------

PR 5230 Process Transmitter in Field Housing



PR 5230 Process Transmitter Preconfigured

Order Number	Type	Description	Shipping Weight lb.	List Price USD
9405 152 30001	PR5230/00	PR 5230/00 Includes: 110/220 VAC Self Sensing Power Supply, A/D Converter, 3x digital input Passive (requires 24V), 3x digital output relays passive, IP66 Stainless Steel Field Housing	0.5	\$2,605
9405 152 30021	PR5230/02	PR 5230/02 Includes: 24V Power Supply, A/D Converter, 3x digital input Passive (requires 24V), 3x digital output relays passive, IP66 Stainless Steel Field Housing	0.5	\$2,828

PR 5230 Accessories- field installable - shipped separately

Order Number	Type	Description	Shipping Weight lb.	List Price USD
9405 352 30061	PR5230/06	PR 5230/06 Interface Card Analog Output 0/4-20 mA	0.5	\$238
9405 352 30221	PR5230/22	PR 5230/22 Load Cell connection Board up to 4 Load Cells	0.5	\$180
9405 352 30301	PR5230/30	PR 5230/30 Ethernet female connector RJ45, IP65	0.5	\$222
9405 352 30311	PR5230/31	PR 5230/31 Ethernet cable with cable glance, 7m, RJ45 plug, Industrial Material	3.0	\$128
9405 317 21411	PR1721/41	PR 1721/41 Interface Card Profibus DP	0.3	\$930
9405 317 21421	PR1721/42	PR 1721/42 Interface Card Interbus-S	0.3	\$1,312
9405 317 21441	PR1721/44	PR 1721/44 Interface Card Device Net	0.3	\$930
9405 317 21451	PR1721/45	PR 1721/45 Interface Card CC-Link	0.3	\$1,450
9405 317 21461	PR1721/46	PR 1721/46 Interface Card Profinet	0.3	\$1,082
9405 317 21471	PR1721/47	PR 1721/47 Interface Card Ethernet/IP	0.3	\$1,082

MTL Kit for Ex applications

Order Number	Type	Description	Shipping Weight lb.	List Price USD
MTL-KIT	MTL-KIT	FM approved load cell barrier	1.0	\$1,597

PR 5230 Process Transmitter in Field Housing

Build To Order PR 5230 Process Transmitter

Order Number	Type	Description	Shipping Weight lb.	List Price
				USD
9405 152 30000	PR5230	PR 5230 Transmitter base unit / please add the needed options	1.0	\$2,605

Build To Order options for PR 5230

Order Number	Description	STD W/ Base Unit	List Price
			USD
L0	L0 110/ 240V AC Power Supply	x	Included
L8	L8 24V DC Power Supply		\$223
W1	W1 Weighing Point (A/D Converter)	x	Included
WE1	WE1 Weighing Point (A/D Converter) with intrinsically safe Load Cell supply		\$401
Y2	Y2 Zone 2/22 ATEX Approval		\$223
DE1	DE1 Standard 3x Digital Input (Passive) (external 24V supply needed)	x	Included
DE2	DE2 Standard 3x Digital Input Active (internal 12V supply)		\$49
DA1	DA1 Standard 3x Digital Relays Output (passive)	x	Included
DA2	DA2 Standard 3x Digital Optocoupler Output passive		\$49

Order Number	Description	Slot 1/2/3	List Price
			USD
C11	C11 Interface Card Analog Output 0/4-20 mA	0/-/-	\$237
C21	C21 Interface Card Profibus DP	-/0/-	\$926
C22	C22 Interface Card Interbus-S	-/0/-	\$1,309
C24	C24 Interface Card Device Net	-/0/-	\$926
C25	C25 Interface Card CC-Link	-/0/-	\$1,443
C26	C26 Interface Card Profinet	-/0/-	\$1,077
C27	C27 Interface Card Ethernet/IP	-/0/-	\$1,077
C31	C31 Load Cell connection Board up to 4 Load Cells	-/-/0	\$179
M39	M39 Ethernet female connector RJ45, IP65		\$223
M40	M40 Ethernet cable with cable glance, 7m, RJ45 plug, Industrial Material		\$223

Transmitters

- Ethernet TCP/IP incl. Modbus TCP for PC connection to OPC Server or configuration by Browser
- Incl. OPC license and OPC Server PR 1792
- Protection class IP 20, DIN Rail-mounting
- 3 digital inputs and outputs
- 1 analog output 0/4-20mA
- incl. EasyFill application for simple single component filling - UL approved



PR 5220 Ethernet Transmitter

Order Number	Type	Description	Shipping Weight lb.	List Price USD
9405 152 20003	PR5220/00	PR 5220/00 Enet Trans, analog output, 0/4-20 mA, 24 VDC	1.1	\$2,140
9405 152 20013	PR5220/01	PR 5220/01 Enet Trans, analog output, 0/4-20 mA, 24 VDC, with Profibus-DP	1.1	\$2,759
9405 152 20043	PR5220/04	PR 5220/04 Enet Trans, analog output, 0/4-20 mA, 24 VDC, with Device Net	1.1	\$2,759
9405 152 20063	PR5220/06	PR 5220/06 Enet Trans, analog output, 0/4-20 mA, 24 VDC, with ProfiNet	1.1	\$2,759
9405 152 20073	PR5220/07	PR 5220/07 Enet Trans, analog output, 0/4-20 mA, 24 VDC, with Ethernet-IP	1.1	\$2,759


- efficient weight transmitter with touch display
- fast and precise weight values
- control of 3 digital inputs and outputs
- easy and fast installation via web browser
- support of the most common global fieldbuses



PR 5215 Process Transmitter Link E

Order Number	Type	Description	Shipping Weight lb.	List Price USD
9405 152 15001	PR5215/00	PR 5215/00 Weight Transmitter MiNexx Link E - Basic	1.0	\$1,023
9405 152 15011	PR5215/01	PR 5215/01 Weight Transmitter MiNexx Link E - Basic + Profibus-DP	1.0	\$1,091
9405 152 15041	PR5215/04	PR 5215/04 Weight Transmitter MiNexx Link E - Basic + Device Net	1.0	\$1,296
9405 152 15051	PR5215/05	PR 5215/05 Weight Transmitter MiNexx Link E - Basic + CC Link	1.0	\$1,296
9405 152 15061	PR5215/06	PR 5215/06 Weight Transmitter MiNexx Link E - Basic + ProfiNet	1.0	\$1,091
9405 152 15071	PR5215/07	PR 5215/07 Weight Transmitter MiNexx Link E - Basic + Ethernet/IP	1.0	\$1,091
9405 152 15081	PR5215/08	PR 5215/08 Weight Transmitter MiNexx Link E - Basic + EtherCAT	1.0	\$1,296
9405 152 15101	PR5215/10	PR 5215/10 Weight Transmitter MiNexx Link E - Basic + 1 x analog output	1.0	\$1,091
9405 152 15111	PR5215/11	PR 5215/11 Weight Transmitter MiNexx Link E - Basic + 1 x analog output + Profibus-DP	1.0	\$1,159

- Linearity better than 0.01% of full scale
- Analog outputs 0/4 to 20mA and 0 to 10VDC simultaneously usable
- Four load cells of 350 ohm can be powered
- Active low pass filter from 0.25Hz to 32Hz

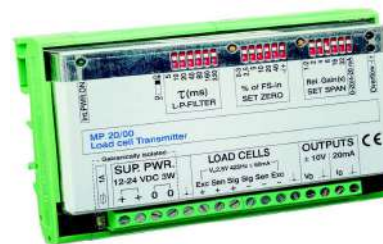

MP 20 -Analog Weight Transmitter

Order Number	Type	Description	Weight lb.	USD
9408 800 20001	MP 20/00	MP 20/00 analog transmitter	0.5	\$826

Transmitters Continued

- IP 65 sealed front panel
- Manual tare
- 16 bit resolution and up to 20 readings/sec
- 3 digital control inputs



MP 30 - Weight Indicator

Order Number	Type	Description	Weight lb.	USD
9408 800 30001	MP 30/00	MP 30/00 Digital indicator, 85-250 V AC	0.9	\$917
9408 800 30011	MP 30/01	MP 30/01 Digital indicator, 11-36 V AC/DC	0.9	\$1,002

Hardware Options for Weighing Indicator MP 30 MUST BE INSTALLED AT FACTORY AT TIME OF ORDER

Order Number	Type	Description	Weight lb.	USD
9408 800 30101	MP 30/10	MP 30/10 Option Card - Relay output, 2 changeover contacts	add 0.25	\$153
9408 800 30111	MP 30/11	MP 30/11 Option Card - Relay output, 4 relays	add 0.25	\$178
9408 800 30201	MP 30/20	MP 30/20 Option Card - analog output	add 0.25	\$240
9408 800 30311	MP 30/31	MP 30/31 Option Card - RS 232 interface	add 0.25	\$178
9408 800 30321	MP 30/32	MP 30/32 Option Card - RS 485 interface	add 0.25	\$203

- Simple Weighing Transmitter for one Scale
- Full Digital Signal Processing with up to 20,000 divisions Resolution
- Analog output 0/4. 20 mA, 0/2..10 V, fully galvanically isolated from supply
- Direct calibration and configuration via front keys or via PC-Engineering Tool MP 26/10
- Protection class IP 20



MP 26 - Digital Weight Transmitter

Order Number	Type	Description	Weight lb.	USD
9408 800 26001	MP 26/00	MP 26/00 Meteor Digital Process Transmitter 85-264 V AC	0.7	\$938
9408 800 26011	MP 26/01	MP 26/01 Meteor Digital Process Transmitter 18-35 V AC/DC	0.5	\$990

Option for Digital Transmitter MP 26

Order Number	Type	Description	USD
9408 800 26101	MP 26/10	MP 26/10 Meteor Engineering Tool for MP 26	\$1,144

Weight Transmitter's continued

- Configurable display
- RS-422/485 interface
- Basic dosing possible
- with EzCTS Software compatible



CSD-892 - Weight transmitter

Order Number	Type	Description	Price in USD
9409 108 92001	CSD-892-76	CSD-892-76 Weight transmitter RS-422/485	\$1,975

- 7-digit display
- RS-485 interface & 4...20mA analog output
- Basic dosing possible
- with EzCTS Software compatible



CSD-903 - Weight indicator

Order Number	Type	Description	Price in USD
9409 109 03001	CSD-903-07	CSD-903-07 Weight transmitter RS-422/485 & 4...20mA analog output	\$2,117

- weight value analysis
- intuitive operation via touch display
- material management and dosing
- with EzCTS Software compatible



CSD-912 & CSD-918 - Weight controller

Order Number	Type	Description	Price in USD
9409 109 12001	CSD-912-07-76	CSD-912-07-76 Weight controller RS-422/485 & 4...20mA analog output	\$3,952
9409 109 18001	CSD-918-07-76	CSD-918-07-76 Weight controller with additional measurement of feeding and discharging with a servo amplifier and servo motor	\$6,634

EzCTS Software

Order Number	Type	Description	Price in USD
9409 390 01001	EzCTS Software	EzCTS Software Software for communication with CSD weighing electronics	\$133

ProRecipe XT Stand Alone Recipe Batch Kit			
Type	Order Number	Description	List Price USD
PR-BATCH		Batch system includes: ProRecipeXT for Stand Alone installation Maxxis 5 Process Controller with housing and wall bracket CAPS1U-200EE-LU Installation and training quoted separately	\$11,393

ProRecipe XT Stand Alone Recipe Batch Kit for Validated Systems			
Type	Order Number	Description	List Price USD
PR-BATCH - Validated		Batch system includes: ProRecipeXT for Stand Alone installation for validated system Maxxis 5 Process Controller with housing and wall bracket CAPS1U-200EE-LU Installation and training quoted separately	\$15,771

PR 1750 - Program Development Tool			
Order Number	Type	Description	List Price USD
9405 317 50601	PR1750/60	PR 1750/60 Development Tool / PR 1750 for Maxxis 4 and Maxxis 5	\$1,263



ProRecipe XT® in the production



Development

Laboratory

Automatic
batching
(Project solutions)

Manual-
dosing



PR 8501 - Pro Recipe XT

Pro Recipe XT Software			
Order Number	Type	Description	List Price USD
9405 385 01101	PR8501/10	PR8501/10 ProRecipe XT - Bundle: Single location version PC Recipe-Management System ProRecipe XT® for installation on a standalone PC (not extendable) - ProRecipe XT® Program Server incl. Database Server - incl. 1 Management-Client - incl. 1 Weighing-Client	\$5,611
9405 385 01151	PR8501/15	PR8501/15 ProRecipe XT - Maxxis 5 Bundle for a network based installation of ProRecipeXT exclusive for Maxxis 5 Weighing clients. Including ProRecipeXT Server with MS-SQL Express 2014 data base server incl. one Management client (PR8501/20), one Maxxis 5 Weighing Client (PR8501/23), Requires application software H1 on Maxxis 5.	\$5,010
9405 385 01201	PR8501/20	PR8501/20 ProRecipe XT - Server (incl. 1 Management Client) Non Regulated, CD and License	\$9,873
9405 385 01211	PR8501/21	PR8501/21 ProRecipe XT - Management Client, License	\$3,366
9405 385 01221	PR8501/22	PR8501/22 ProRecipe XT - Weighing Client, License	\$3,292
9405 385 01231	PR8501/23	PR8501/23 ProRecipe XT - Weighing Client for Maxxis 5, License	\$1,458
9405 385 01301	PR8501/30	PR8501/30 ProRecipe XT - Calibration check, License	\$3,029
9405 385 01311	PR8501/31	PR8501/31 ProRecipe XT - Non Minebea Intec Scale Driver , License (per connected scale)	\$1,309
9405 385 01331	PR8501/33	PR8501/33 ProRecipe XT - Module for integration of Standard Operating Procedures (SOP)	\$2,880
9405 385 01341	PR8501/34	PR8501/34 ProRecipe XT - Module EasyFill for automatic dosing of single components	\$2,383
9405 385 01351	PR8501/35	PR8501/35 ProRecipe XT - Module for integrating a completeness check function	\$10,248
9405 385 01401	PR8501/40	PR8501/40 ProRecipe XT - Data Interface basic module (for data communication with ERP/MES etc.)	\$6,786

Pro Recipe XT Software Regulated Version for Validation			
Order Number	Type	Description	List Price USD
9405 385 02101	PR8502/10	PR8502/10 ProRecipe XT - Bundle: Single location version PC regulated Recipe-Management System ProRecipe XT® for installation on a standalone PC (not extendable) - ProRecipe XT® Program Server incl. Database Server - incl. 1 Management-Client - incl. 1 Weighing-Client	\$10,658
9405 385 02151	PR8502/15	PR8502/15 PR8502/15 - Bundle: Single location with Maxxis 5 regulated Recipe-Management System ProRecipe X 1 Maxxis 5 as Terminal (PC-side not extendable) - ProRecipe XT® Program Server incl. Database Server - incl. 1 Management-Client - incl. 1 Weighing-Client Maxxis 5	\$9,389
9405 385 02201	PR8502/20	PR8502/20 ProRecipe XT® Server regulated Recipe-Management System ProRecipe XT® Server - ProRecipe XT® Program Server incl. Database Server - Basis for a ProRecipe XT® network installation - incl. 1 Management-Client	\$14,063
9405 385 02211	PR8502/21	PR8502/21 ProRecipe XT® Management-Client regulated For data maintenance, incoming goods transaction and order generation in a network installation	\$4,711
9405 385 02221	PR8502/22	PR8502/22 ProRecipe XT® PC Weighing Client regulated For manual weighing of recipes in a network installation	\$4,674
9405 385 02231	PR8502/23	PR8502/23 ProRecipe XT® Maxxis 5 Weighing Client regulated For manual weighing of recipes on a Maxxis 5 as client in a network installation, requires application software H1 on Maxxis 5	\$2,208
9405 385 01311	PR8501/31	PR8501/31 ProRecipe XT - Non Minebea Intec Scale Driver , License (per connected scale)	\$1,309
9405 385 02321	PR8502/32	PR8502/32 ProRecipe XT® Validation kit Test documentation according to GAMP5 recommendation	\$7,593
9405 385 01331	PR8501/33	PR8501/33 ProRecipe XT - Module for integration of Standard Operating Procedures (SOP)	\$2,880
9405 385 01341	PR8501/34	PR8501/34 ProRecipe XT - Module EasyFill for automatic dosing of single components	\$2,383
9405 385 01351	PR8501/35	PR8501/35 ProRecipe XT - Module for integrating a completeness check function	\$10,248
9405 385 01401	PR8501/40	PR8501/40 ProRecipe XT - Data Interface basic module (for data communication with ERP/MES etc.)	\$6,786